上海巨能
Shang Hai Juneng

06

Page(123~176)

K系列
K Series

圆弧锥齿轮硬齿面减速机
HELICAL BEVEL GEAR REDUCTOR



www.sh-juneng.com

K系列结构图：/K series structure drawing

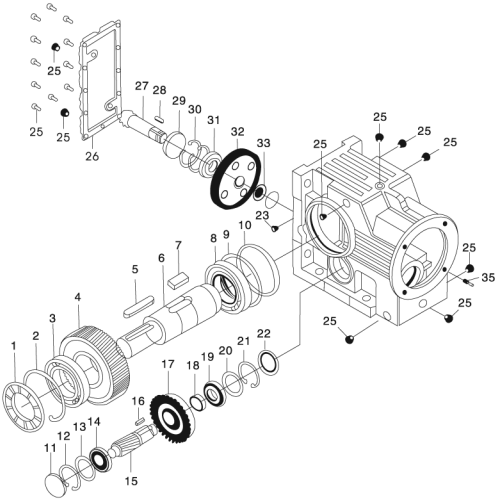

1.封盖 Grand
2.孔用挡圈 Circlip for hole
3.轴承 Bearing
4.大齿轮 First-stage big gear
5.平键 Key
6.输出轴 Output shaft
7.平键 Key
8.轴承 Bearing
9.调整环 Adjusting strip
10.封盖 Grand
11.封盖 Grand
12.孔用挡圈 Circlip for hole
12.孔用挡圈Circlip for hole
13.调整环Adjusting strip
14.轴承 Bearing
15.三级齿轮轴 Third-stage gear shaft
16.平键 Key
17.二级大齿轮 Second-stage big gear
18.轴套 Shaft sleeve
19.轴承 Bearing
20.调整环 Adjusting strip
21.孔用挡圈Circlip for hole
22.封盖 Grand
23.油镜 Oil gauge
24.螺钉 Screw
25.螺塞 Oil plug
26.箱盖 Cover plate
27.二级齿轮轴 Second stage gear shaft
28.平键 Key
29.轴承 Bearing
30.孔用挡圈 Circlip for hole
31.轴承 Bearing
32.一级大齿轮First-stage big gear
33.止动垫圈 Lock washer
34.小圆螺母 Round nut
35.一级小齿轮 First stage gear shaft

K系列斜齿,螺旋锥齿轮减速器型号规格及机型表示方法

本系列减速器的型号规格有：K(37.47.57.67.77.87.97) 107.127.157.167.187.)等12种，减速比5~186等多种速比，可分别配置0.18~200KW

Type,specification and model natation for stock series helical gear ,spiral bevel speed reducers:
Types,specifications of this series speed reducer have 12 kinds including K 37.47.57.67.77.87.97. 107.127.157.167.187etc,speed reducing ratio: 5~186 which can be allocated to 0.18~200 KW

一、结构形式 Mounting type:

1.K型
底脚安装圆弧锥齿轮硬齿面减速机。

1.Model Stock
Foot-mounted helical-bevel gear reductor



2.KAB型
底脚空心轴安装圆弧锥轮硬齿面减速机。

2.Model KAB
Foot-mounted helical-bevel gear reductor with hollow shaft



3.KF型
B5法兰安装圆弧锥齿轮硬齿面减速机。

3.Model SKF
Helical-bevel gear reductor in B5 flange-mounted version



4.KAF型
B5法兰空心轴安装圆弧锥齿轮硬齿面减速机。

4.Model KAF
Helical-bevel gear reductor in B5 flange-mounted version with hollow shaft



5.KA型
空心轴安装圆弧锥齿轮硬齿面减速机。

5.Model KA
Helical-bevel gear reductor with hollow shaft



6.KAT型
空心轴安装防转臂固定圆弧锥齿轮硬齿面减速机。

6.Model KAT
Helical-bevel gear reductor in torque-arm version with hollow shaft



7.KAZ型
B14法兰空心轴安装弧齿锥齿轮硬齿面减速机。

7.Model KAZ
Helical-bevel gear reductor in B14 flange-mounted version with hollow shaft



8.K..R型
K系列R..7系列组合减速机

8.Model K..R
Combination of SK series reductor and SR.,7 series reductor



9.K..S型
输入轴型，即配输入轴不配电动机的圆弧锥齿轮硬齿面减速机。

9.Model K..S
Input-shaft style, in another word, helical-bevel gear reductor equipped with input shaft but without the motor

K SERIES

二、K系列减速机安装方位及电机接线盒位置及选型参数
Mounting position and motor terminal box position for Stock series reducer

K\KA

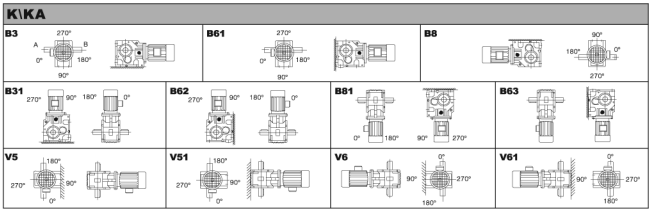

KF\KAF

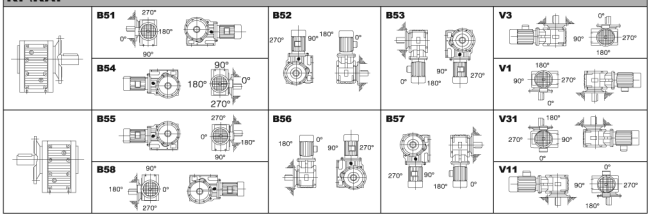

KAT



KAZ

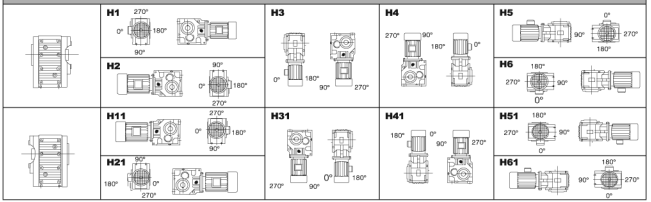

注：从电机尾端看轴朝左为A向，朝右为B向

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.18	0.10	16892	14378	0.80	K 127 R77	4P	586
	0.11	14358	12221	0.86	KA 127 R77	4P	556
	0.12	13315	11333	0.93	K F 127 R77	4P	626
	0.14	11557	9837	1.07	KAF127 R77	4P	596
	0.16	10135	8627	1.22			
	0.18	9068	7718	1.36			
	0.21	7624	6490	1.62			
	0.24	6821	5806	1.81			
	0.28	5930	5047	2.1			
	0.32	5148	4832	2.4			
	0.36	4530	3856	2.7			
	0.41	3938	3352	3.1			
	0.17	9871	8402	0.80	K 107 R77	4P	391
	0.19	8581	7304	0.89	KA 107 R77	4P	366
	0.23	7249	6170	1.05	KF 107 R77	4P	401
	0.24	6752	5747	1.13	KAF107 R77	4P	386
	0.27	6080	5175	1.25			
	0.32	5066	4312	1.50			
	0.36	4539	3863	1.67			
	0.41	3946	3358	1.93			
	0.47	3470	2953	2.2			
	0.53	3088	2629	2.5			
	0.61	2685	2285	2.8			
	0.31	5302	4513	0.80	K 97 R 57	4P	244
	0.35	4723	4020	0.86	KA 97 R57	4P	224
	0.39	4188	3564	0.98	KF 97 R57	4P	264
	0.44	3737	3181	1.09	KAF97 R 57	4P	249
	0.51	3222	2743	1.27			
	0.57	2875	2447	1.42			
	0.63	2578	2195	1.58			
	0.74	2212	1883	1.85			
	0.86	1889	1607	2.2			
	0.99	1657	1410	2.5			
	1.1	1486	1265	2.7			
	1.3	1275	1085	3.2			
	1.5	1126	958	3.6			
	1.6	1010	859	4.0			
	1.9	874	744	4.7			
	0.45	3662	3117	0.80	K 87 R57	4P	164
	0.52	3166	2695	0.81	KA 87 R57	4P	149
	0.57	2889	2459	0.89	KF 87 R57	4P	169
	0.68	2403	2045	1.07	KAF87 R57	4P	164
	0.74	2221	1890	1.16			
	0.83	1957	1666	1.31			
	0.98	1664	1417	1.54			
	1.1	1434	1221	1.79			
	1.3	1288	1096	2.0			
	1.4	1131	963	2.3			
	0.94	1738	1479	0.85	K 77 R37	4P	99
	1.0	1628	1385	0.90	KA 77 R37	4P	91
	1.1	1444	1229	1.02	KF 77 R37	4P	107
	1.3	1233	1050	1.19	KAF77 R37	4P	99
	1.5	1085	923	1.36			
	1.8	931	792	1.58			
	2.0	830	707	1.77			
	2.2	745	634	1.98			
	2.6	635	541	2.3			
	2.8	584	497	2.5			
	3.2	518	441	2.8			
	3.8	429	365	3.4			
	1.5	1070	910	0.80	K 67 R37	4P	66
	1.7	941	801	0.83	KA 67 R37	4P	63
	2.0	804	684	0.97	KF 67 R37	4P	71
	2.3	719	612	1.08	KAF67 R37	4P	69

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N・m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.18	2.5	646	550	1.21	K 67 R37	4P	66
	2.9	557	474	1.40	KA 67 R37	4P	63
	3.4	474	403	1.64	KF 67 R37	4P	71
	3.9	423	360	1.84	KAF67 R37	4P	69
	4.3	379	323	2.1			
	5.0	329	280	2.4			
	2.3	716	609	0.80	K 57 R37	4P	58
	2.6	630	537	0.90	KA 57 R37	4P	56
	2.9	558	475	1.02	KF 57 R37	4P	63
	3.4	487	415	1.17	KAF57 R37	4P	61
	3.8	431	367	1.32			
	4.4	373	318	1.53			
	4.9	334	285	1.70			
	5.7	288	245	1.98			
	6.6	249	212	2.3			
	7.2	228	194	2.5			
	8.4	194	165	2.9			
	3.7	444	378	0.86	K 47 R37	4P	47
	4.3	384	326	0.99	KA 47 R37	4P	46
	4.8	341	290	1.12	KF 47 R37	4P	49
	5.5	295	251	1.29	KAF47 R37	4P	48
	6.2	264	225	1.44			
	7.1	231	197	1.64			
	8.1	203	173	1.87			
	9.2	178	151	2.1			
	11	151	128	2.5			
	6.0	288	142.31	2.8	K 67	6P	55
	6.9	248	122.78	3.3	KA 67	6P	52
	7.9	217	107.36	3.8	KF 67	6P	60
					KAF67	6P	58
	9.8	176	142.31	4.7	K 67	4P	51
	11	152	122.78	5.4	KA 67	4P	48
	13	133	107.36	6.2	KF 67	4P	56
					KAF67	4P	54
	5.8	296	146.36	2.0	K 57	6P	47
	6.7	255	126.27	2.3	KA 57	6P	45
	7.7	223	110.41	2.7	KF 57	6P	52
	8.2	210	103.67	2.9	KAF57	6P	50
	9.2	186	92.03	3.2			
	9.5	181	146.36	3.3	K 57	4P	43
	11	156	126.27	3.8	KA 57	4P	41
	13	137	110.41	4.4	KF 57	4P	48
	13	128	103.67	4.7	KAF57	4P	46
	15	114	92.03	5.3			
	18	97	78.06	6.2			
	6.4	268	132.32	1.49	K 47	6P	36
	6.8	253	125.23	1.58	KA 47	6P	35
	8.0	216	106.69	1.85	KF 47	6P	38
	9.2	187	92.27	2.1	KAF47	6P	37
	9.9	174	86.20	2.3			
	11	164	132.32	2.4	K 47	4P	32
	11	155	125.23	2.6	KA 47	4P	31
	13	132	106.69	3.0	KF 47	4P	34
	15	114	92.27	3.5	KAF47	4P	33
	16	107	86.20	3.8			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.18	7.9	217	107.43	0.92	K 37	6P	29
	8.6	201	99.17	1.00	KA 37	6P	28
	10	173	85.39	1.16	KF 37	6P	32
	11	150	74.38	1.33	KAF37	6P	31
	13	133	107.43	1.51	K 37	4P	25
	14	123	99.17	1.63	KA 37	4P	24
	16	106	85.39	1.89	KF 37	4P	28
	19	92	74.38	2.2	KAF37	4P	27
	20	86	69.65	2.3			
	24	72	57.85	2.8			
	25	67	54.54	3.0			
	29	60	48.67	3.3			
	32	54	43.60	3.7			
	34	51	41.32	3.9			
	37	46	37.19	4.3			
	39	44	35.31	4.6			
	45	38	30.95	5.2			
	48	36	28.76	5.6			
	55	31	25.05	6.5			
	59	29	23.46	6.9			
	67	26	20.70	7.8			
	80	21	17.34	9.3			
	90	19	15.51	9.4			
	109	16	12.77	11			
	116	15	12.00	12			
	123	14	11.30	13			
	130	13	10.65	12			
	161	11	8.63	15			
	172	10	8.07	16			
0.25	0.14	16052	9837	0.80	K 127 R77	4P	590
	0.16	14077	8627	0.88	KA 127 R77	4P	560
	0.18	12594	7718	0.98	KF 127 R77	4P	630
	0.21	10589	6490	1.17	KAF127 R77	4P	600
	0.24	9474	5806	1.30			
	0.28	8236	5047	1.50			
	0.32	7150	4382	1.73			
	0.36	6292	3856	1.96			
	0.41	5469	3352	2.3			
	0.23	10068	6170	0.80	K 107 R77	4P	395
	0.24	9378	5747	0.81	KA 107 R77	4P	370
	0.27	8444	5175	0.90	KF 107 R77	4P	405
	0.32	7037	4312	1.08	KAF107 R77	4P	390
	0.36	6304	3863	1.21			
	0.41	5480	3358	1.39			
	0.47	4819	2953	1.58			
	0.53	4289	2629	1.77			
	0.61	3729	2285	2.0			
	0.72	3150	1930	2.4			
	0.81	2808	1721	2.7			
	089	2560	1569	3.0			
	1.0	2225	1363	3.4			
	0.44	5191	3181	0.80	K 97 R57	4P	248
	0.51	4475	2743	0.91	KA 97 R57	4P	228
	0.57	3993	2447	1.02	KF 97 R57	4P	268
	0.63	3581	2195	1.14	KAF97 R57	4P	253
	0.74	3073	1883	1.33			
	0.86	2623	1607	1.56			
	0.99	2301	1410	1.78			
	1.1	2063	1265	1.98			
	1.3	1771	1085	2.3			
	1.5	1564	958	2.6			
	1.6	1402	859	2.9			
	1.9	1214	744	3.4			
	2.1	1059	649	3.9			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.25	0.68	3337	2045	0.80	K 87 R57	4P	168
	0.74	3084	1890	0.83	KA 87 R57	4P	153
	0.83	2718	1666	0.94	KF 87 R57	4P	173
	0.98	2312	1417	1.11	KAF87 R57	4P	168
	1.1	1992	1221	1.29			
	1.3	1789	1096	1.43			
	1.4	1571	963	1.63			
	1.9	1186	727	2.2			
	2.2	1043	639	2.5			
	1.3	1713	1050	0.86	K 77 R37	4P	103
	1.5	1506	923	0.98	KA 77 R37	4P	95
	1.8	1293	792	1.14	KF 77 R37	4P	111
	2.0	1153	707	1.28	KAF77 R37	4P	103
	2.2	1034	634	1.42			
	2.6	883	541	1.67			
	2.8	811	497	1.82			
	3.2	719	441	2.0			
	3.8	596	365	2.5			
	4.3	529	324	2.8			
	4.8	472	289	3.1			
	5.5	416	255	3.5			
	6.3	360	220	4.1			
	7.1	318	195	4.6			
	8.0	285	175	5.2			
	2.3	998	612	0.80	K 67 R37	4P	70
	2.5	897	550	0.87	KA 67 R37	4P	67
	2.9	774	474	1.01	KF 67 R37	4P	75
	3.4	658	403	1.18	KAF67 R37	4P	73
	3.9	587	360	1.33			
	4.3	526	323	1.48			
	5.0	457	280	1.71			
	5.6	409	250	1.91			
	6.5	347	213	2.2			
	3.4	677	415	0.84	K 57 R37	4P	62
	3.8	599	367	0.95	KA 57 R37	4P	60
	4.4	518	318	1.10	KF 57 R37	4P	67
	4.9	464	285	1.23	KAF57 R37	4P	65
	5.7	400	245	1.43			
	6.6	346	212	1.65			
	7.2	317	194	1.80			
	8.4	269	165	2.1			
	9.4	241	148	2.4			
	11	212	130	2.7			
	12	182	112	3.1			
	14	160	98	3.6			
	4.5	527	142.30	1.56	K 67	8P	63
	5.3	455	122.80	1.80	KA 67	8P	60
	6.0	398	107.40	2.1	KF 67	8P	68
	6.4	373	100.80	2.2	KAF67	8P	66
	6.0	400	142.31	2.1	K 67	6P	57
	6.9	345	122.78	2.4	KA 67	6P	54
	7.9	302	107.36	2.7	KF 67	6P	62
	8.4	283	100.80	2.9	KAF67	6P	60
	9.8	244	142.31	3.4	K 67	4P	55
	11	211	122.78	3.9	KA 67	4P	52
	13	184	107.36	4.4	KF 67	4P	60
	14	173	100.80	4.7	KAF67	4P	58
	5.8	411	146.36	1.46	K 57	6P	49
	6.7	355	126.27	1.69	KA 57	6P	47
	7.7	310	110.41	1.93	KF 57	6P	54
	8.2	291	103.67	2.1	KAF57	6P	52
	9.2	258	92.03	2.3			
	11	219	78.06	2.7			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.25	9.5	251	146.36	2.4	K 57	4P	47
	11	217	126.27	2.8	KA 57	4P	45
	13	190	110.41	3.2	KF 57	4P	52
	13	178	103.67	3.4	KAF57	4P	50
	15	158	92.03	3.8			
	18	134	78.06	4.5			
	6.4	372	132.32	1.08	K 47	6P	38
	6.8	352	125.32	1.14	KA 47	6P	37
	8.0	300	106.69	1.33	KF 47	6P	40
	9.2	259	92.27	1.54	KAF47	6P	39
	9.9	242	86.20	1.65			
	11	227	132.32	1.76	K 47	4P	36
	11	215	125.23	1.86	KA 47	4P	35
	13	183	106.69	2.2	KF 47	4P	38
	15	158	92.27	2.5	KAF47	4P	37
	16	148	86.20	2.7			
	13	185	107.43	1.08	K 37	4P	29
	14	170	99.17	1.17	KA 37	4P	28
	16	147	85.39	1.36	KF 37	4P	32
	19	128	74.38	1.57	KAF37	4P	31
	20	120	69.65	1.67			
	24	99	57.85	2.0			
	25	94	54.54	2.1			
	29	84	48.67	2.4			
	32	75	43.60	2.7			
	34	71	41.32	2.8			
	37	64	37.19	3.1			
	39	61	35.31	3.3			
	45	53	30.95	3.8			
	48	49	28.76	4.0			
	55	43	25.05	4.6			
	59	40	23.46	5.0			
	67	36	20.70	5.6			
	80	30	17.34	6.7			
	90	27	15.51	7.5			
	109	22	12.77	7.3			
	116	21	12.00	7.8			
	123	19	11.30	8.2			
	130	18	10.65	8.7			
	161	15	8.63	11			
	172	14	8.07	12			
	209	11	6.64	12			
	223	11	6.23	12			
0.37	0.18	18639	7718	0.80	K 127 R77	4P	591
	0.21	15672	6490	0.80	KA 127 R77	4P	561
	0.24	14021	5806	0.88	KF 127 R77	4P	631
	0.28	12189	5047	1.01	KAF127 R77	4P	601
	0.32	10582	4382	1.17			
	0.36	9312	3856	1.33			
	0.41	8095	3352	1.53			
	0.47	7090	2936	1.74			
	0.54	6211	2572	1.99			
	0.63	5333	2208	2.3			
	0.73	4630	1917	2.7			
	0.80	4220	1747	2.9			
	0.91	3696	1531	3.3			
	0.36	9330	3863	0.81	K 107 R77	4P	396
	0.41	8111	3358	0.94	KA 107 R77	4P	371
	0.47	7132	2953	1.07	KF 107 R77	4P	406
	0.53	6348	2629	1.20	KAF107 R77	4P	391
	0.61	5518	2285	1.38			
	0.72	4661	1930	1.63			
	0.81	4156	1721	1.83			
	0.89	3789	1569	2.0			
	1.0	3293	1363	2.3			
	1.2	2830	1172	2.7			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N·m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.37	0.63	5300	2195	0.80	K 97 R57	4P	249
	0.74	4548	1883	0.90	KA 97 R57	4P	229
	0.86	3882	1607	1.05	KF 97 R57	4P	269
	0.99	3406	1410	1.20	KAF97 R57	4P	254
	1.1	3054	1265	1.34			
	1.3	2620	1085	1.56			
	1.5	2315	958	1.76			
	1.6	2076	859	1.97			
	1.9	1796	744	2.3			
	2.1	1567	649	2.6			
	2.4	1379	571	3.0			
	1.0	3421	1417	0.80	K 87 R57	4P	169
	1.1	2948	1221	0.87	KA 87 R57	4P	154
	1.3	2647	1096	0.97	KF 87 R57	4P	174
	1.4	2325	963	1.10	KAF87 R57	4P	169
	1.9	1756	727	1.46			
	2.2	1544	639	1.66			
	2.5	1362	564	1.88			
	3.0	1134	470	2.3			
	3.2	1046	433	2.5			
	3.8	894	370	2.9			
	1.8	1913	792	0.80	K 77 R37	4P	104
	2.0	1707	707	0.86	KA 77 R37	4P	96
	2.2	1530	634	0.96	KF 77 R37	4P	112
	2.6	1306	541	1.13	KAF77 R37	4P	104
	2.8	1200	497	1.23			
	3.2	1064	441	1.38			
	3.8	882	365	1.67			
	4.3	783	324	1.88			
	4.8	698	289	2.1			
	5.5	615	255	2.4			
	6.3	532	220	2.8			
	7.1	471	195	3.1			
	8.0	422	175	3.5			
	9.2	365	151	4.0			
	3.4	974	403	0.80	K 67 R37	4P	71
	3.9	869	360	0.90	KA 67 R37	4P	68
	4.3	779	323	1.00	KF 67 R37	4P	76
	5.0	676	280	1.15	KAF67 R37	4P	74
	5.6	605	250	1.29			
	6.5	514	213	1.52			
	7.3	462	191	1.69			
	8.4	399	165	1.95			
	9.8	342	141	2.3			
	11	294	122	2.7			
	4.9	687	285	0.83	K 57 R37	4P	63
	5.7	592	245	0.96	KA 57 R37	4P	61
	6.6	512	212	1.11	KF 57 R37	4P	68
	7.2	469	194	1.22	KAF57 R37	4P	66
	8.4	399	165	1.43			
	9.4	357	148	1.60			
	11	314	130	1.81			
	12	270	112	2.1			
	14	236	98	2.4			
	4.9	725	137.42	2.1	K 77	8P	99
	5.2	684	129.64	2.3	KA 77	8P	91
	5.8	612	116.11	2.5	KF 77	8P	107
	7.0	501	95.07	3.1	KAF77	8P	99
	6.4	549	137.42	2.8	K 77	6P	93
	6.8	518	129.64	3.0	KA 77	6P	85
	7.6	464	116.11	3.3	KF 77	6P	101
	9.3	380	95.07	4.1	KAF77	6P	93
	7.2	488	191.87	3.2	K 77	4P	89
	7.8	453	178.26	3.4	KA 77	4P	81
	8.9	395	155.57	3.9	KF 77	4P	97
					KAF77	4P	89

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.37	6.2	566	107.36	1.45	K 67	8P	66
	6.6	532	100.80	1.54	KA 67	8P	63
	7.7	459	86.97	1.79	KF 67	8P	71
					KAF67	8P	69
	7.2	490	122.78	1.67	K 67	6P	60
	8.2	429	107.36	1.87	KA 67	6P	57
	8.8	402	100.80	1.99	KF 67	6P	65
	10	347	86.97	2.3	KAF67	6P	63
	9.8	362	142.31	2.3	K 67	4P	56
	11	312	122.78	2.6	KA 67	4P	53
	13	273	107.36	3.0	KF 67	4P	61
	14	256	100.80	3.2	KAF67	4P	59
	16	221	86.97	3.7			
	18	193	75.90	4.2			
	7.0	504	126.27	1.19	K 57	6P	52
	8.0	441	110.41	1.36	KA 57	6P	50
	8.5	414	103.67	1.45	KF 57	6P	57
	9.6	367	82.03	1.63	KAF57	6P	55
	11	312	78.06	1.93			
	13	281	70.47	2.1			
	9.5	372	146.36	1.61	K 57	4P	48
	11	321	126.27	1.87	KA 57	4P	46
	13	281	110.41	2.1	KF 57	4P	53
	13	264	103.67	2.3	KAF57	4P	51
	15	234	92.03	2.6			
	18	198	78.06	3.0			
	20	179	70.47	3.3			
	8.3	426	106.69	0.94	K 47	6P	41
	9.6	368	92.27	1.09	KA 47	6P	40
	10	344	86.20	1.16	KF 47	6P	43
	12	303	75.80	1.32	KAF47	6P	42
	11	336	132.32	1.19	K 47	4P	37
	11	318	125.23	1.26	KA 47	4P	36
	13	271	106.69	1.47	KF 47	4P	39
	15	235	92.27	1.71	KAF47	4P	38
	16	219	86.20	1.83			
	18	193	75.80	2.1			
	19	181	71.30	2.2			
	22	161	63.44	2.5			
	14	252	99.17	0.80	K 37	4P	30
	16	217	85.39	0.92	KA 37	4P	29
	19	189	74.38	1.06	KF 37	4P	33
	20	177	69.65	1.13	KAF37	4P	32
	24	147	57.85	1.36			
	25	139	54.54	1.44			
	29	124	48.67	1.62			
	32	111	43.60	1.80			
	34	105	41.32	1.90			
	37	95	37.19	2.1			
	39	90	35.31	2.2			
	45	79	30.95	2.5			
	48	73	28.76	2.7			
	55	64	25.05	3.1			
	59	60	23.46	3.2			
	67	53	20.70	3.6			
	80	44	17.34	4.3			
	90	39	15.51	4.8			
	109	32	12.77	5.9			
	116	31	12.00	5.9			
	123	29	11.30	6.3			
	130	27	10.65	5.9			
	161	22	8.63	7.3			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.37	172	21	8.07	7.8	K 37	4P	30
	209	17	6.64	9.5	KA 37	4P	29
	223	16	6.23	10	KF 37	4P	33
	253	14	5.49	11	KAF37	4P	32
0.55	0.09	55986	15596	0.85	K 187 R97	4P	2255
	0.10	52475	14618	0.91	KA187 R97	4P	2195
	0.11	46457	12941	1.02			
	0.12	40738	11348	1.17			
	0.14	36060	10045	1.32			
	0.15	34027	9479	1.40			
	0.17	29126	8114	1.63			
	0.19	26709	7440	1.78			
	0.13	39377	10969	0.80	K 167 R97	4P	1535
	0.14	36908	10281	0.82	KA 167 R97	4P	1495
	0.16	30339	8730	0.97			
	0.21	23932	6667	1.27			
	0.26	19047	5306	1.60			
	0.29	17483	4870	1.74			
	0.34	14709	4097	2.1			
	0.20	24678	6874	0.80	K 157 R97	4P	1035
	0.23	21527	5997	0.80	KA 157 R97	4P	995
	0.28	17961	5003	0.95	KF 157 R97	4P	1115
	0.31	16235	4522	1.05	KAF 157 R97	4P	1055
	0.35	14312	3987	1.19			
	0.39	12786	3562	1.34			
	0.46	10888	3033	1.57			
	0.32	15730	4382	0.80	K 127 R77	4P	595
	0.36	13843	3856	0.89	KA 127 R77	4P	565
	0.41	12033	3352	1.03	KF 127 R77	4P	635
	0.47	10539	2936	1.17	KAF 127 R77	4P	605
	0.54	9233	2572	1.34			
	0.63	7928	2208	1.56			
	0.73	6882	1917	1.79			
	0.80	6272	1747	1.97			
	0.91	5495	1531	2.2			
	1.0	4840	1348	2.6			
	1.1	4345	1210	2.8			
	1.3	3811	1062	3.2			
	0.47	10602	2953	0.80	K 107 R77	4P	400
	0.53	9437	2629	0.81	KA 107 R77	4P	375
	0.61	8203	2285	0.93	KF 107 R77	4P	410
	0.72	6929	1930	1.10	KAF 107 R77	4P	395
	0.81	6177	1721	1.23			
	0.89	5632	1569	1.35			
	1.0	4894	1363	1.55			
	1.2	4207	1172	1.81			
	1.3	3719	1036	2.0			
	1.5	3252	906	2.3			
	1.8	2791	777	2.7			
	2.0	2440	680	3.1			
	2.3	2175	606	3.5			
	0.99	5063	1410	0.81	K 97 R57	4P	253
	1.1	4540	1265	0.90	KA 97 R57	4P	233
	1.3	3895	1085	1.05	KF 97 R57	4P	273
	1.5	3441	958	1.19	KAF 97 R57	4P	258
	1.6	3085	859	1.32			
	1.9	2670	744	1.53			
	2.1	2330	649	1.75			
	2.4	2048	571	1.99			
	2.8	1807	503	2.3			
	3.2	1550	432	2.6			
	3.6	1375	383	3.0			
	4.1	1227	342	3.3			
	4.6	1086	303	3.8			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.55	1.4	3456	963	0.80	K 87 R57	4P	173
	1.9	2610	727	0.98	KA 87 R57	4P	158
	2.2	2294	639	1.12	KF 87 R57	4P	178
	2.5	2024	564	1.27	KAF87 R57	4P	173
	3.0	1686	470	1.52			
	3.2	1555	433	1.65			
	3.8	1330	370	1.93			
	4.2	1176	327	2.2			
	4.7	1070	298	2.4			
	5.6	892	248	2.9			
	5.9	847	236	3.0			
	7.1	705	196	3.6			
	2.6	1942	541	0.80	K 77 R37	4P	108
	2.8	1784	497	0.83	KA 77 R37	4P	100
	3.2	1582	441	0.93	KF 77 R37	4P	116
	3.8	1312	365	1.12	KAF77 R37	4P	108
	4.3	1163	324	1.27			
	4.8	1038	289	1.42			
	5.5	914	255	1.61			
	6.3	791	220	1.86			
	7.1	700	195	2.1			
	8.0	627	175	2.3			
	9.2	543	151	2.7			
	5.0	1005	280	0.80	K 67 R37	4P	75
	5.6	899	250	0.87	KA 67 R37	4P	72
	6.5	764	213	1.02	KF 67 R37	4P	80
	7.3	686	191	1.14	KAF67 R37	4P	78
	8.4	593	165	1.31			
	9.8	508	141	1.53			
	11	436	122	1.79			
	4.0	1328	169.35	2.0	K 87	8P	154
	4.2	1253	159.84	2.2	KA 87	8P	139
	4.4	1185	151.20	2.3	KF 87	8P	159
	4.6	1143	145.74	2.4	KAF87	8P	154
	4.6	1137	191.52	2.4	K 87	6P	147
	5.2	1005	169.35	2.7	KA 87	6P	132
	5.5	949	159.84	2.8	KF 87	6P	152
	5.9	897	151.20	3.0	KAF87	6P	147
	6.1	865	145.74	3.1			
	4.9	1077	37.42	1.44	K 77	8P	102
	5.2	1016	129.64	1.53	KA 77	8P	94
	5.8	910	116.11	1.70	KF 77	8P	110
	7.0	745	95.07	2.1	KAF77	8P	102
	5.7	923	155.57	1.68	K 77	6P	95
	6.4	816	137.42	1.90	KA 77	6P	87
	6.8	769	129.64	2.0	KF 77	6P	103
	7.6	689	16.11	2.2	KAF77	6P	95
	8.9	588	155.57	2.6	K 77	4P	93
	10	519	37.42	2.9	KA 77	4P	85
	11	490	129.64	3.1	KF 77	4P	101
	12	439	116.11	3.4	KAF77	4P	93
	15	359	95.07	4.2			
	7.2	729	122.78	1.13	K 67	6P	62
	8.2	637	107.36	1.29	KA 67	6P	59
	8.8	598	100.80	1.37	KF 67	6P	67
	10	516	86.97	1.59	KAF67	6P	65
	12	450	75.90	1.82			
	11	464	122.78	1.77	K 67	4P	60
	13	406	107.36	2.0	KA 67	4P	57
	14	381	100.80	2.2	KF 67	4P	65
	16	329	86.97	2.5	KAF67	4P	63
	18	287	75.90	2.9			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.55	8.0	655	110.41	0.92	K 57	6P	54
	8.5	615	103.67	0.98	KA 57	6P	52
	9.6	546	92.03	1.10	KF 57	6P	59
	11	463	78.06	1.30	KAF57	6P	57
	13	418	70.47	1.43			
	15	362	60.98	1.66			
	16	338	56.92	1.78			
	11	477	126.27	1.26	K 57	4P	52
	13	417	110.41	1.44	KA 57	4P	50
	13	392	103.67	1.53	KF 57	4P	57
	15	348	92.03	1.73	KAF57	4P	55
	18	295	78.06	2.0			
	20	266	70.47	2.3			
	23	230	60.98	2.6			
	24	215	56.92	2.8			
	13	403	106.69	0.99	K 47	4P	41
	15	349	92.27	1.15	KA 47	4P	40
	16	326	86.20	1.23	KF 47	4P	43
	18	286	75.80	1.40	KAF47	4P	42
	19	269	71.30	1.48			
	22	240	63.44	1.67			
	25	212	56.02	1.89			
	28	186	49.15	2.2			
	30	174	46.14	2.3			
	24	219	57.85	0.91	K 37	4P	34
	25	206	54.54	0.97	KA 37	4P	33
	29	184	48.67	1.09	KF 37	4P	37
	32	165	43.60	1.21	KAF37	4P	36
	34	156	41.32	1.28			
	37	141	37.19	1.42			
	39	133	35.31	1.50			
	45	117	30.95	1.71			
	48	109	28.76	1.84			
	55	95	35.05	1.90			
	59	89	23.46	2.0			
	67	78	20.70	2.3			
	80	66	17.34	2.7			
	90	59	15.51	2.7			
	109	48	12.77	3.3			
	116	45	12.00	3.5			
	123	43	11.30	3.7			
	130	40	10.65	4.0			
	161	33	8.63	4.9			
	172	30	8.07	4.6			
	209	25	6.64	5.6			
	223	24	6.23	6.0			
	253	21	5.49	6.8			
0.75	0.11	63350	12941	0.80	K 187 R97	4P	2256
	0.12	55552	11348	0.86	KA 187 R97	4P	2196
	0.14	49173	10045	0.97			
	0.15	46400	9479	1.02			
	0.17	39718	8114	1.20			
	0.19	36422	7440	1.30			
	0.20	34143	6975	1.39			
	0.23	29226	5970	1.63			
	0.16	42735	8730	0.80	K 167 R97	4P	1536
	0.21	32635	6667	0.93	KA 167 R97	4P	1496
	0.26	25973	5306	1.17			
	0.29	23840	4870	1.28			
	0.34	20057	4097	1.52			
	0.40	16917	3456	1.80			
	0.35	19516	3987	0.88	K 157 R97	4P	1036
	0.39	17435	3562	0.98	KA 157 R97	4P	996
	0.46	14847	3033	1.15	KF 157 R97	4P	1116
	0.54	12691	2593	1.35	KAF157 R97	4P	1056

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.75	0.60	11431	2335	1.50	K 157 R97	4P	1036
	0.68	10042	2051	1.70	KA 157 R97	4P	996
	0.79	8639	1765	1.98	KF 157 R97	4P	1116
	0.89	8052	1645	2.1	KAF157 R97	4P	1056
	1.1	6409	1309	2.7			
	0.41	16408	3352	0.80	K 127 R77	4P	596
	0.47	14371	2936	0.86	KA 127 R77	4P	566
	0.54	12591	2572	0.98	KF 127 R77	4P	636
	0.63	10811	2208	1.14	KAF127 R77	4P	606
	0.73	9385	1917	1.32			
	0.80	8553	1747	1.44			
	0.91	7493	1531	1.65			
	1.0	6600	1348	1.87			
	1.1	5925	1210	2.1			
	1.3	5197	1062	2.4			
	1.5	4553	930	2.7			
	0.81	8424	1721	0.90	K 107 R77	4P	401
	0.89	7680	1569	0.99	KA 107 R77	4P	376
	1.0	6674	1363	1.14	KF 107 R77	4P	411
	1.2	5737	1172	1.32	KAF107 R77	4P	396
	1.3	5071	1036	1.50			
	1.5	4434	906	1.71			
	1.8	3805	777	2.0			
	2.0	3327	680	2.3			
	2.3	2966	606	2.6			
	1.3	5312	1085	0.80	K 97 R57	4P	254
	1.5	4692	958	0.87	KA 97 R57	4P	234
	1.6	4207	859	0.97	KF 97 R57	4P	274
	1.9	3641	744	1.12	KAF97 R57	4P	259
	2.1	3177	649	1.29			
	2.4	2793	571	1.46			
	2.8	2464	503	1.66			
	3.2	2114	432	1.93			
	3.6	1875	383	2.2			
	4.1	1673	342	2.4			
	4.6	1481	303	2.8			
	5.4	1255	256	3.3			
	6.2	1106	226	3.7			
	7.0	971	198	4.2			
	1.9	3559	727	0.80	K 87 R57	4P	174
	2.2	3129	639	0.82	KA 87 R57	4P	159
	2.5	2761	564	0.93	KF 87 R57	4P	179
	3.0	2299	470	1.12	KAF87 R57	4P	174
	3.2	2120	433	1.21			
	3.8	1814	370	1.41			
	4.2	1603	327	1.60			
	4.7	1459	298	1.76			
	5.6	1216	248	2.1			
	5.9	1156	236	2.2			
	7.1	961	196	2.7			
	3.8	1788	365	0.82	K 77 R37	4P	109
	4.3	1587	324	0.93	KA 77 R37	4P	101
	4.8	1416	289	1.04	KF 77 R37	4P	117
	5.5	1247	255	1.18	KAF77 R37	4P	109
	6.3	1079	220	1.36			
	7.1	954	195	1.54			
	8.0	856	175	1.72			
	9.2	740	151	1.99			
	3.8	1882	178.72	2.3	K 97	8P	241
	4.6	1557	147.79	2.8	KA 97	8P	221
	4.9	1447	137.41	3.0	KF 97	8P	261
					KAF97	8P	246

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N・m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.75	4.0	1784	169.35	1.51	K 87	8P	161
	4.3	1684	159.84	1.60	KA 87	8P	146
	4.5	1593	151.20	1.70	KF 87	8P	166
	4.7	1535	145.74	1.76	KAF87	8P	161
	5.4	1333	169.35	2.0	K 87	6P	151
	5.7	1258	159.84	2.1	KA 87	6P	136
	6.0	1190	151.20	2.3	KF 87	6P	156
	6.2	1147	145.74	2.4	KAF87	6P	151
	7.2	998	126.79	2.7			
	7.3	987	191.52	2.7	K 87	4P	146
	8.2	873	169.35	3.1	KA 87	4P	131
	8.7	824	159.84	3.3	KF 87	4P	151
	9.2	779	151.20	3.5	KAF87	4P	146
	9.5	751	145.74	3.6			
	6.6	1082	137.42	1.43	K 77	6P	99
	7.0	1020	129.64	1.52	KA 77	6P	91
	7.8	914	116.11	1.70	KF 77	6P	107
	9.6	748	95.07	2.1	KAF77	6P	99
	8.9	802	155.57	1.93	K 77	4P	94
	10.11	708	137.42	2.2	KA 77	4P	86
	10.72	668	129.64	2.3	KF 77	4P	102
	11.97	598	116.11	2.6	KAF77	4P	94
	14.62	490	95.07	3.2			
	11	633	122.78	1.30	K 67	4P	61
	13	553	107.36	1.48	KA 67	4P	58
	14	519	100.80	1.58	KF 67	4P	66
	16	448	86.97	1.83	KAF67	4P	64
	18	391	75.90	2.1			
	20	367	71.16	2.2			
	23	306	59.30	2.7			
	25	288	55.98	2.8			
	11	651	126.27	0.92	K 57	4P	53
	13	569	110.41	1.05	KA 57	4P	51
	13	534	103.67	1.12	KF 57	4P	58
	15	474	92.03	1.27	KAF57	4P	56
	18	402	78.06	1.49			
	20	365	70.74	1.65			
	23	314	60.98	1.91			
	24	293	56.92	2.0			
	28	257	49.85	2.3			
	32	226	43.91	2.4			
	18	391	75.80	1.02	K 47	4P	42
	19	367	71.30	1.09	KA 47	4P	41
	22	327	63.44	1.22	KF 47	4P	44
	25	289	56.02	1.39	KAF47	4P	43
	28	253	49.15	1.58			
	30	238	46.14	1.68			
	34	210	40.81	1.90			
	38	187	36.25	2.1			
	45	158	30.71	2.5			
	32	225	43.60	0.89	K 37	4P	35
	34	213	41.32	0.94	KA 37	4P	34
	37	192	37.19	1.04	KF 37	4P	38
	39	182	35.31	1.10	KAF37	4P	37
	45	159	30.95	1.25			
	48	148	28.76	1.35			
	55	129	25.05	1.55			
	59	121	23.46	1.49			
	67	107	20.70	1.69			
	80	89	17.34	1.99			
	90	80	15.51	2.1			
	109	66	12.77	2.4			
	116	62	12.00	2.6			
	123	58	11.30	2.7			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.75	130	55	10.65	2.9	K 37	4P	35
	161	44	8.63	3.1	KA 37	4P	34
	172	42	8.07	3.4	KF 37	4P	38
	209	34	6.64	4.1	KAF37	4P	37
	223	32	6.23	4.4			
	253	28	5.49	5.0			
1.1	0.15	67568	9479	0.80	K 187 R97	4P	2261
	0.17	57836	8114	0.82	KA 187 R97	4P	2201
	0.19	53037	7440	0.90			
	0.20	49719	6975	0.96			
	0.23	42558	5970	1.12			
	0.26	37669	5284	1.26			
	0.30	33598	4713	1.41			
	0.31	31809	4462	1.49			
	0.26	37822	5306	0.80	K 167 R97	4P	1541
	0.29	34716	4870	0.88	KA 167 R97	4P	1501
	0.34	29207	4097	1.04			
	0.41	24634	3456	1.23			
	0.50	20133	2824	1.51			
	0.61	16337	2292	1.86			
	0.71	14150	1985	2.1			
	0.82	12122	1700	2.5			
	1.0	9592	1346	3.2			
	1.1	9025	1266	3.4			
	0.39	25389	3562	0.80	K 157 R97	4P	1041
	0.46	21620	3033	0.80	KA 157 R97	4P	1001
	0.54	18481	2593	0.93	KF 157 R97	4P	1121
	0.60	16645	2335	1.03	KAF157 R97	4P	1061
	0.68	14624	2051	1.17			
	0.79	12581	1765	1.36			
	0.85	11725	1645	1.46			
	1.1	9333	1309	1.83			
	1.1	8781	1232	1.95			
	1.3	7818	1097	2.2			
	1.5	6643	932	2.6			
	1.6	6130	860	2.8			
	1.8	5457	766	3.1			
	2.2	4607	646	3.7			
	2.4	4132	580	4.1			
	0.78	13667	1917	0.90	K 127 R77	4P	601
	0.80	12455	1747	0.99	KA 127 R77	4P	571
	0.91	10911	1531	1.13	KF 127 R77	4P	641
	1.0	9611	1348	1.29	KAF127 R77	4P	611
	1.2	8628	1210	1.43			
	1.3	7568	1062	1.63			
	1.5	6630	930	1.86			
	1.8	5634	790	2.2			
	2.0	4980	699	2.5			
	2.3	4343	609	2.8			
	2.6	3804	534	3.2			
	3.0	3303	463	3.7			
	1.2	8354	1172	0.91	K 107 R77	4P	406
	1.4	7385	1036	1.03	KA 107 R77	4P	381
	1.5	6457	906	1.18	KF 107 R77	4P	416
	1.8	5541	777	1.37	KAF107 R77	4P	401
	2.1	4845	680	1.57			
	2.3	4319	606	1.76			
	2.7	3705	520	2.1			
	3.0	3314	465	2.3			
	3.5	2890	405	2.6			
	3.9	2576	361	2.9			
	4.4	2257	317	3.4			
	1.9	5302	744	0.80	K 97 R57	4P	259
	2.2	4626	649	0.88	KA 97 R57	4P	239
	2.5	4067	571	1.00	KF 97 R57	4P	279
	2.8	3588	503	1.14	KAF97 R57	4P	264

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
1.1	3.2	3079	432	1.33	K 97 R57	4P	259
	3.7	2730	383	1.50	KA 97 R57	4P	239
	4.1	2436	342	1.68	KF 97 R57	4P	274
	4.6	2157	303	1.89	KAF97 R57	4P	264
	5.5	1827	256	2.2			
	6.2	1611	226	2.5			
	7.1	1415	198	2.9			
	3.0	3348	470	0.80	K 87 R57	4P	179
	3.2	3087	433	0.83	KA 87 R57	4P	164
	3.8	2641	370	0.97	KF 87 R57	4P	184
	4.3	2334	327	1.10	KAF87 R57	4P	179
	4.7	2125	298	1.21			
	5.6	1771	248	1.45			
	5.9	1683	236	1.52			
	7.1	1399	196	1.83			
	3.8	2761	178.72	1.56	K 97	8P	244
	4.6	2283	147.79	1.88	KA 97	8P	224
	4.9	2123	137.41	2.0	KF 97	8P	264
	5.7	1855	120.11	2.3	KAF97	8P	249
	5.1	2063	178.72	2.1			
	6.2	1706	147.79	2.5			
	6.6	1586	137.41	2.7			
	7.6	1387	120.11	3.1			
	7.8	1341	178.72	3.2	K 97	4P	231
	9.5	1109	147.79	3.9	KA 97	4P	211
	10	1031	137.41	4.2	KF 97	4P	251
					KAF97	4P	236
	5.4	1955	169.35	1.38	K 87	6P	155
	5.7	1845	159.84	1.46	KA 87	6P	140
	6.0	1745	151.20	1.55	KF 87	6P	160
	6.2	1682	145.74	1.60	KAF87	6P	155
	7.2	1464	126.79	1.84			
	7.7	1372	118.81	1.97			
	8.3	1271	169.35	2.1	K 87	4P	151
	8.8	1199	159.84	2.3	KA 87	4P	136
	9.3	1135	151.20	2.4	KF 87	4P	156
	9.6	1094	145.74	2.5	KAF87	4P	151
	11	951	126.79	2.8			
	12	892	118.81	3.0			
	6.6	1586	137.42	0.98	K 77	6P	103
	7.0	1497	129.64	1.04	KA 77	6P	95
	7.8	1340	116.11	1.16	KF 77	6P	111
					KAF77	6P	103
	10	1031	137.42	1.50	K 77	4P	99
	11	973	129.64	1.59	KA 77	4P	91
	12	871	116.11	1.78	KF 77	4P	107
	15	713	95.07	2.1	KAF77	4P	99
	16	666	88.70	2.3			
	18	584	77.79	2.6			
	19	548	73.07	2.7			
	13	806	107.36	1.02	K 67	4P	66
	14	756	100.80	1.08	KA 67	4P	63
	16	653	86.97	1.26	KF 67	4P	71
	18	570	75.90	1.44	KAF67	4P	69
	20	534	71.16	1.54			
	24	445	59.30	1.84			
	25	420	55.98	1.95			
	28	376	50.07	2.2			
	31	338	44.98	2.4			
	36	289	38.54	2.8			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
1.1	15	691	92.03	0.87	K 57 KA 57 KF 57 KAF57	4P 4P 4P 4P	58 56 63 61
	18	586	78.06	1.02			
	20	529	70.47	1.13			
	23	458	60.98	1.31			
	25	427	56.92	1.40			
	28	374	49.85	1.60			
	32	329	43.91	1.82			
	36	292	38.85	2.1			
	39	271	36.12	2.2			
	46	230	30.64	2.6			
	51	208	27.66	2.9			
	58	180	23.94	3.3			
	63	168	22.34	3.6			
	72	147	19.56	3.9			
	81	129	17.23	4.3			
	92	114	15.25	4.5			
	103	102	13.54	4.9			
	114	92	12.72	4.5			
	126	84	11.14	5.0			
	143	74	9.81	5.5			
	161	65	8.68	6.0			
	182	58	7.71	6.3			
	25	420	56.02	0.95	K 47 KA 47 KF 47 KAF47	4P 4P 4P 4P	47 46 49 48
	28	369	49.15	1.08			
	30	346	46.14	1.16			
	34	306	40.81	1.31			
	39	272	36.25	1.47			
	46	230	30.71	1.65			
	49	214	28.47	1.78			
	53	199	26.47	1.91			
	57	185	24.68	2.1			
	65	162	21.57	2.3			
	74	142	18.98	2.7			
	45	232	30.95	0.86	K 37 KA 37 KF 37 KAF37	4P 4P 4P 4P	40 39 43 42
	49	216	28.76	0.93			
	56	188	25.05	1.06			
	60	176	23.46	1.14			
	68	155	20.70	1.16			
	81	130	17.34	1.38			
	90	116	15.51	1.55			
	110	96	12.77	1.69			
	117	90	12.00	1.80			
	124	85	11.30	1.91			
	131	80	10.65	2.0			
	162	65	8.63	2.5			
	173	61	8.07	2.7			
	211	50	6.64	3.0			
	225	47	6.23	3.2			
	255	41	5.49	3.6			
1.5	0.20	67799	6975	0.80	K 187 R97 KA 187 R97	4P 4P	2265 2205
	0.23	58034	5970	0.82			
	0.26	51367	5284	0.92			
	0.30	45815	4713	1.04			
	0.31	43375	4462	1.10			
	0.40	34066	3505	1.39			
	0.46	29478	3033	1.61			
	0.50	27486	2828	1.73			
	0.58	23502	2418	2.0			
	0.34	39828	4097	0.80	K 167 R97 KA 167 R97	4P 4P	1545 1505
	0.41	33592	3456	0.90			
	0.50	27454	2824	1.11			
	0.61	22278	2292	1.36			
	0.71	19295	1985	1.58			
	0.82	16529	1700	1.84			
	1.0	13080	1346	2.3			
	1.1	12306	1266	2.5			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
1.5	0.60	22698	2335	0.80	K 157 R97	4P	1045
	0.68	19941	2051	0.86	KA 157 R97	4P	1005
	0.79	17155	1765	1.00	KF 157 R97	4P	1125
	0.85	15989	1645	1.07	KAF157 R97	4P	1065
	1.1	12727	1309	1.34			
	1.1	11975	1232	1.43			
	1.3	10661	1097	1.60			
	1.5	9059	932	1.89			
	1.6	8358	860	2.0			
	1.8	7441	766	2.3			
	2.2	6282	646	2.7			
	2.4	5638	580	3.0			
	2.6	5220	537	2.4	K 127 R87	4P	635
	3.0	4598	473	2.7	KA 127 R87	4P	605
	3.3	4068	419	3.0	KF 127 R87	4P	675
	3.8	3552	365	3.5	KAF127 R87	4P	645
	0.80	16984	1747	0.80	K 127 R77	4P	605
	0.91	14878	1531	0.83	KA 127 R77	4P	575
	1.0	13106	1348	0.94	KF 127 R77	4P	645
	1.2	11765	1210	1.05	KAF127 R77	4P	615
	1.3	10320	1062	1.20			
	1.5	9041	930	1.37			
	1.8	7683	790	1.61			
	2.0	6791	699	1.82			
	2.3	5923	609	2.1			
	2.6	5188	534	2.4			
	3.0	4503	463	2.7			
	1.2	11391	1172	0.80	K 107 R77	4P	410
	1.4	10070	1036	0.80	KA 107 R77	4P	385
	1.5	8805	906	0.86	KF 107 R77	4P	420
	1.8	7556	777	1.01	KAF10 R77	4P	405
	2.1	6607	680	1.15			
	2.3	5889	606	1.29			
	2.7	5052	520	1.50			
	3.0	4519	465	1.68			
	3.5	3941	405	1.93			
	3.9	3513	361	2.2			
	4.4	3077	317	2.5			
	2.5	5546	571	0.80	K 97 R57	4P	263
	2.8	4893	503	0.83	KA 97 R57	4P	243
	3.2	4198	432	0.97	KF 97 R57	4P	283
	3.7	3723	383	1.10	KAF97 R57	4P	268
	4.1	3322	342	1.23			
	4.6	2942	303	1.39			
	5.5	2491	256	1.64			
	6.2	2197	226	1.86			
	7.1	1929	198	2.1			
	4.3	3183	327	0.81	K 87 R57	4P	183
	4.7	2898	298	0.89	KA 87 R57	4P	168
	5.6	2415	248	1.06	KF 87 R57	4P	188
	5.9	2295	236	1.12	KAF87 R57	4P	183
	7.1	1908	196	1.34			
	7.6	1789	184	1.43			
	4.8	2963	142.71	2.7	K 107	8P	377
	5.6	2561	123.38	3.1	KA 107	8P	352
	6.0	2394	115.32	3.3	KF 107	8P	387
					KAF107	8P	372
	4.7	3068	147.41	1.40	K 97	8P	252
	5.0	2853	137.41	1.51	KA 97	8P	232
	5.7	2494	120.11	1.72	KF 97	8P	272
					KAF97	8P	257

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
1.5	5.1	2783	178.72	1.55	K 97	6P	241
	6.2	2301	147.79	1.87	KA 97	6P	221
	6.7	2140	137.41	2.0	KF 97	6P	261
	7.7	1870	120.11	2.3	KAF97	6P	246
	7.8	1829	178.72	2.4			
	9.5	1512	147.79	2.8			
	10	1406	137.41	3.1			
	12	1229	120.11	3.5			
	6.3	2269	145.74	1.19	K 87	6P	161
	7.3	1974	126.79	1.37	KA 87	6P	146
	7.7	1850	118.81	1.46	KF 87	6P	166
	8.8	1637	105.13	1.65	KAF87	6P	161
	8.3	1733	169.35	1.56	K 87	4P	155
	8.8	1636	159.84	1.65	KA 87	4P	140
	9.3	1547	151.20	1.75	KF 87	4P	160
	9.6	1491	145.74	1.81	KAF87	4P	155
	11	1297	126.79	2.1			
	12	1216	118.81	2.2			
	13	1076	105.13	2.5			
	17	863	84.34	3.1			
	7.9	1808	116.11	0.86	K 77	6P	109
	9.7	1480	95.07	1.05	KA 77	6P	101
	10	1381	88.70	1.12	KF 77	6P	117
	12	1211	77.79	1.28	KAF77	6P	109
	10	1406	137.42	1.10	K 77	4P	103
	11	1327	129.64	1.17	KA 77	4P	95
	12	1188	116.11	1.30	KF 77	4P	111
	15	973	95.07	1.59	KAF77	4P	103
	16	908	88.70	1.71			
	18	796	77.79	1.95			
	19	748	73.07	2.1			
	22	663	64.82	2.3			
	24	592	57.84	2.6			
	27	531	51.86	2.9			
	31	469	45.86	3.3			
	35	412	40.22	3.8			
	16	890	86.97	0.92	K 67	4P	70
	18	777	75.90	1.06	KA 67	4P	67
	20	728	71.16	1.13	KF 67	4P	75
	24	607	59.30	1.35	KAF67	4P	73
	25	573	55.98	1.43			
	28	512	50.07	1.60			
	31	460	44.98	1.78			
	36	394	38.54	2.1			
	39	365	35.65	2.2			
	47	306	29.90	2.7			
	50	285	27.85	2.9			
	58	249	24.31	3.3			
	23	624	60.98	0.96	K 57	4P	62
	25	582	56.92	1.03	KA 57	4P	60
	28	510	49.85	1.18	KF 57	4P	67
	32	449	43.91	1.34	KAF57	4P	65
	36	398	38.85	1.51			
	39	370	36.12	1.62			
	46	314	30.64	1.91			
	51	283	27.66	2.1			
	58	245	23.94	2.4			
	63	229	22.34	2.6			
	71	200	19.59	2.9			
	34	418	40.81	0.96	K 47	4P	51
	39	371	36.25	1.08	KA 47	4P	50
	46	314	30.71	1.27	KF 47	4P	53
	49	291	28.47	1.37	KAF47	4P	52
	53	271	26.47	1.48			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
1.5	57	252	24.68	1.58	K 47	4P	51
	65	221	21.57	1.81	KA 47	4P	50
	74	194	18.98	1.96	KF 47	4P	53
	83	172	16.79	2.2	KAF47	4P	52
	89	162	15.82	2.3			
	106	136	13.26	2.7			
	113	127	12.39	2.8			
	121	119	11.59	2.4			
	60	240	23.46	0.83	K 37	4P	44
	68	212	20.70	0.94	KA 37	4P	43
	81	177	17.34	1.13	KF 37	4P	47
	90	159	15.51	1.13	KAF37	4P	46
	110	131	12.77	1.38			
	117	123	12.00	1.47			
	124	116	11.30	1.56			
	131	109	10.65	1.65			
	162	88	8.63	1.70			
	173	83	8.07	1.82			
	211	68	6.64	2.2			
	225	64	6.23	2.2			
	255	56	5.49	2.5			
2.2	0.32	62721	4462	0.80	K 187 R97	4P	2273
	0.41	49260	3505	0.96	KA 187 R97	4P	2213
	0.47	42625	3033	1.11			
	0.50	39745	2828	1.20			
	0.59	33984	2418	1.40			
	0.69	29089	2070	1.63			
	0.79	25301	1800	1.88			
	0.89	22305	1587	2.1			
	0.50	39699	2824	0.80	K 167 R97	4P	1553
	0.62	32214	2292	0.94	KA 167 R97	4P	1513
	0.72	27901	1985	1.09			
	0.84	23902	1700	1.27			
	1.1	18913	1346	1.61			
	1.1	17795	1266	1.71			
	1.3	15688	1116	1.94			
	1.5	13348	950	2.3			
	0.86	23120	1645	0.80	K 157 R97	4P	1053
	1.1	18403	1309	0.93	KA 157 R97	4P	1013
	1.2	17315	1232	0.99	KF 157 R97	4P	1133
	1.3	15416	1097	1.11	KAF157 R97	4P	1073
	1.5	13099	932	1.31			
	1.7	12086	860	1.41			
	1.9	10760	766	1.59			
	2.2	9084	646	1.88			
	2.4	8148	580	2.1			
	2.8	7010	499	2.4			
	2.6	7548	537	1.64	K 127 R87	4P	643
	3.0	6649	473	1.86	KA 127 R87	4P	613
	3.4	5883	419	2.1	KF 127 R87	4P	683
	3.9	5136	365	2.4	KAF127 R87	4P	653
	4.3	4686	333	2.6			
	1.3	14922	1062	0.83	K 127 R77	4P	613
	1.5	13074	930	0.94	KA 127 R77	4P	583
	1.8	11110	790	1.11	KF 127 R77	4P	653
	2.0	9820	699	1.26	KAF127 R77	4P	623
	2.3	8564	609	1.44			
	2.7	7501	534	1.65			
	3.1	6512	463	1.90			
	3.4	5937	422	2.1	K 107 R77	4P	418
	2.3	8515	606	0.89	KA 107 R77	4P	393
	2.7	7305	520	1.04	KF 107 R77	4P	428
	3.1	6534	465	1.16	KAF107 R77	4P	413
	3.5	5698	405	1.33			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
2.2	3.9	5080	361	1.50	K 107 R77	4P	418
	4.5	4450	317	1.71	KA 107 R77	4P	393
	4.9	4039	287	1.88	KF 107 R77	4P	428
	5.6	3536	252	2.1	KAF107 R77	4P	413
	3.7	5383	383	0.80	K 97 R57	4P	271
	4.2	4803	342	0.85	KA 97 R57	4P	251
	4.7	4254	303	0.96	KF 97 R57	4P	291
	5.5	3603	256	1.13	KAF97 R57	4P	276
	6.3	3176	226	1.29			
	7.2	2789	198	1.46			
	5.0	4223	142.71	1.89	K 107	8P	391
	5.8	3651	123.38	2.2	KA 107	8P	366
	6.2	3413	115.32	2.3	KF 107	8P	401
	7.0	3007	101.63	2.7	KAF107	8P	386
	6.4	3303	147.79	1.30	K 97	6P	251
	6.8	3071	137.41	1.40	KA 97	6P	231
	7.8	2685	120.11	1.60	KF 97	6P	261
	8.8	2375	106.26	1.81	KAF97	6P	246
	7.9	2644	178.72	1.63	K 97	4P	243
	9.6	2187	147.79	1.97	KA 97	4P	223
	10	2033	137.41	2.1	KF 97	4P	263
	12	1777	120.11	2.3	KAF97	4P	248
	13	1572	106.26	2.6			
	15	1405	94.94	2.9			
	9.7	2156	145.74	1.25	K 87	4P	163
	11	1876	126.79	1.44	KA 87	4P	148
	12	1758	118.81	1.54	KF 87	4P	168
	14	1556	105.13	1.74	KAF87	4P	163
	17	1248	84.34	2.2			
	18	1186	80.15	2.3			
	20	1025	69.29	2.6			
	22	935	63.22	2.9			
	12	1718	116.11	0.90	K 77	4P	111
	15	1407	95.07	1.10	KA 77	4P	103
	16	1312	88.70	1.18	KF 77	4P	119
	18	1151	77.79	1.35	KAF77	4P	111
	19	1081	73.07	1.43			
	22	959	64.82	1.62			
	25	856	57.84	1.81			
	27	767	51.86	2.0			
	31	679	45.86	2.3			
	35	595	40.22	2.6			
	40	526	35.56	2.9			
	45	468	31.64	3.3			
	47	442	29.91	3.5			
	56	376	25.43	4.1			
	24	877	59.30	0.93	K 67	4P	78
	25	828	55.98	0.99	KA 67	4P	75
	28	741	50.07	1.11	KF 67	4P	83
	32	666	44.98	1.23	KAF67	4P	81
	37	570	38.54	1.44			
	40	527	35.65	1.55			
	47	442	29.90	1.85			
	51	412	27.85	1.99			
	58	360	24.31	2.3			
	62	337	22.77	2.3			
	75	279	18.85	2.7			
	80	263	17.74	2.8			
	90	233	15.75	3.0			
	105	200	13.52	2.7			
	113	186	12.59	3.0			
	138	152	10.29	3.0			
	147	143	9.66	3.2			
	167	126	8.53	3.5			
	199	105	7.12	3.8			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N・m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
2.2	32	650	43.91	0.92	K 57	4P	70
	37	575	38.85	1.04	KA 57	4P	68
	39	534	36.12	1.12	KF 57	4P	75
	46	453	30.64	1.32	KAF57	4P	73
	51	409	27.66	1.34			
	59	354	23.94	1.55			
	64	331	22.34	1.66			
	73	289	19.56	1.90			
	82	255	17.23	1.96			
	93	226	15.25	2.2			
	105	200	13.54	2.5			
	116	182	12.72	2.2			
	127	165	11.14	2.4			
	54	392	26.47	1.02	K 47	4P	59
	58	365	24.68	1.10	KA 47	4P	58
	66	319	21.57	1.25	KF 47	4P	61
	75	281	18.98	1.42	KAF47	4P	60
	85	248	16.79	1.41			
	90	234	15.82	1.50			
	107	196	13.26	1.78			
	115	183	12.39	1.64			
	123	171	11.59	1.75			
	131	161	10.87	1.74			
	157	134	9.02	2.1			
	111	189	12.77	1.06	K 37	4P	52
	118	178	12.00	1.13	KA 37	4P	51
	126	167	11.30	1.20	KF 37	4P	55
	133	158	10.65	1.27	KAF37	4P	54
	165	128	8.63	1.25			
	176	119	8.07	1.34			
	214	98	6.64	1.53			
	228	92	6.23	1.63			
	259	81	5.49	1.85			
3	0.47	58126	3033	0.82	K 187 R97	4P	2277
	0.50	54198	2828	0.88	KA 187 R97	4P	2217
	0.59	46341	2418	1.03			
	0.69	39667	2070	1.20			
	0.79	34502	1800	1.38			
	0.89	30416	1587	1.56			
	1.0	26036	1358	1.82			
	1.2	23580	1230	2.0			
	0.84	32593	1700	0.93	K 167 R97	4P	1557
	1.1	25791	1346	1.18	KA 167 R97	4P	1517
	1.1	24266	1266	1.25			
	1.3	21393	1116	1.42			
	1.5	18202	950	1.67			
	1.7	16270	849	1.87			
	1.9	14074	734	2.2			
	1.2	23612	1232	0.80	K 157 R97	4P	1057
	1.3	21021	1097	0.81	KA 157 R97	4P	1017
	1.5	17862	932	0.96	K 157 R97	4P	1137
	1.7	16481	860	1.04	KA 157 R97	4P	1077
	1.9	14673	766	1.17			
	2.2	12388	646	1.38			
	2.4	11111	580	1.54			
	2.8	9559	499	1.79			
	2.6	10293	537	1.20	K 127 R87	4P	647
	3.0	9067	473	1.36	KA 127 R87	4P	817
	3.4	8022	419	1.54	K 127 R87	4P	687
	3.9	7004	365	1.76	KA 127 R87	4P	657
	4.3	6390	333	1.93			
	5.0	5486	286	2.3			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
3	1.8	15150	790	0.82	K 127 R77	4P	617
	2.0	13391	699	0.92	KA 127 R77	4P	587
	2.3	11678	609	1.06	KF 127 R77	4P	657
	2.7	10229	534	1.21	KAF127 R77	4P	627
	3.1	8880	463	1.39			
	3.4	8095	422	1.53			
	3.1	8910	465	0.85	K 107 R77	4P	422
	3.5	7771	405	0.98	KA 107 R77	4P	407
	3.9	6928	361	1.10	KF 107 R77	4P	432
	4.5	6068	317	1.25	KAF107 R77	4P	417
	4.9	5507	287	1.38			
	5.6	4822	252	1.58			
	6.4	4270	223	1.78			
	7.3	3739	195	2.0			
	8.2	3310	173	2.3			
	9.1	3004	157	2.5			
	10	2630	137	2.9			
	5.5	4913	256	0.83	K 97 R57	4P	275
	6.3	4331	226	0.94	KA 97 R57	4P	255
	7.2	3804	198	1.07	KF 97 R57	4P	295
					KAF97 R57	4P	280
	5.0	5759	142.71	1.39	K 107	8P	399
	5.8	4979	123.38	1.61	KA 107	8P	374
	6.2	4654	115.32	1.72	KF 107	8P	409
	7.0	4101	101.63	1.95	KAF107	8P	394
	7.9	3649	90.43	2.2			
	6.7	4259	142.71	1.01	K 107	6P	399
	7.8	3682	123.38	1.17	KA 107	6P	374
	8.3	3442	115.32	1.25	KF 107	6P	409
	9.4	3033	101.63	1.42	KAF107	6P	394
	9.9	2879	142.71	1.49	K 107	4P	372
	12	2489	123.38	1.73	KA 107	4P	347
					KF 107	4P	382
					KAF107	4P	367
	8.0	3584	120.11	1.20	K 97	6P	274
	9.0	3171	106.26	1.36	KA 97	6P	254
	10	2833	94.94	1.52	KF 97	6P	294
	11	2552	85.50	1.69	KAF97	6P	279
	7.9	3606	178.72	1.19	K 97	4P	247
	9.6	2982	147.79	1.44	KA 97	4P	227
	10	2772	137.41	1.55	KF 97	4P	267
	12	2423	120.11	1.77	KAF97	4P	252
	13	2144	106.26	2.0			
	15	1915	94.94	2.2			
	17	1725	85.50	2.5			
	18	1564	77.51	2.7			
	20	1426	70.67	2.9			
	23	1270	62.93	3.3			
	25	1139	56.43	3.7	K 87	4P	167
	9.7	2940	145.74	0.90	KA 87	4P	152
	11	2558	126.79	1.02	KF 87	4P	172
	12	2397	118.81	1.13	KAF87	4P	167
	14	2121	105.13	1.27			
	17	1702	84.34	1.59			
	18	1617	80.15	1.67			
	20	1398	69.29	1.93			
	22	1275	63.22	2.1			
	25	1152	57.11	2.3			
	29	1003	49.69	2.7			
	32	883	43.75	2.9			
	39	742	36.77	3.2			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N·m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
3	16	1790	88.70★	0.87	K 77 KA 77 KF 77 KAF77	4P 4P 4P 4P	115 107 123 115
	18	1569	77.79★	0.99			
	19	1474	73.07	1.05			
	22	1308	64.82	1.19			
	25	1167	57.84	1.33			
	27	1046	51.86	1.48			
	31	925	45.86	1.68			
	35	811	40.22	1.91			
	40	717	35.56	2.2			
	45	638	31.64	2.4			
	47	603	29.91	2.5			
	56	513	25.43	2.7			
	32	908	45.00	0.90	K 67 KA 67 KF 67 KAF67	4P 4P 4P 4P	82 79 87 85
	37	778	38.54	1.05			
	40	719	35.65	1.14			
	47	603	29.90	1.36			
	51	562	27.85	1.46			
	58	490	24.31	1.63			
	62	459	22.77	1.74			
	75	380	18.85	1.95			
	80	358	17.74	2.1			
	90	318	15.75	2.5			
	105	273	13.52	2.38			
	113	254	12.59	1.65			
	138	208	10.29	1.93			
	147	195	9.66	2.1			
	167	172	8.53	2.3			
	199	144	7.12	2.4			
	46	618	30.64	0.97	K 57 KA 57 KF 57 KAF57	4P 4P 4P 4P	74 72 79 77
	51	558	27.66	1.08			
	59	483	23.94	1.24			
	64	451	22.34	1.33			
	73	395	19.56	1.39			
	82	348	17.23	1.58			
	93	308	15.25	1.72			
	105	273	13.54	1.87			
	116	248	12.72	2.0			
	127	225	11.14	1.87			
	145	198	9.81	2.1			
	164	175	8.68	2.2			
	184	156	7.71	2.3			
	75	383	18.98	1.04	K 47 KA 47 KF 47 KAF47	4P 4P 4P 4P	63 62 65 64
	85	339	16.79	1.12			
	90	319	15.82	1.16			
	107	268	13.26	1.35			
	115	250	12.39	1.28			
	123	234	11.59	1.37			
	131	219	10.87	1.37			
	148	193	9.59	1.45			
	157	182	9.02	1.54			
	167	171	8.50	1.28			
	199	144	7.14	1.53			
	211	136	6.75	1.62			
	249	115	5.70	1.91			
	165	174	8.63	0.89	K 37 KA 37 KF 37 KAF37	4P 4P 4P 4P	56 55 59 58
	176	163	8.07	0.92			
	214	134	6.64	1.05			
	228	126	6.23	1.11			
	259	111	5.49	1.26			
4	0.60	60930	2418	0.80	K 187 R97 KA 187 R97	4P 4P	2285 2225
	0.70	52155	2070	0.91			
	0.80	45363	1800	1.05			
	0.91	39992	1587	1.19			
	1.1	34232	1358	1.39			
	1.2	31004	1230	1.53			
	1.4	26310	1044	1.81			
	1.6	23000	913	2.1			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
4	1.1	33910	1346	0.90	K 167 R97	4P	1565
	1.1	31905	1266	0.95	KA 167 R97	4P	1525
	1.3	28127	1116	1.08			
	1.5	23932	950	1.27			
	1.7	21392	849	1.42			
	2.0	18505	734	1.64			
	2.3	15839	628	1.92			
	1.7	21670	860	0.80	K 157 R97	4P	1065
	1.9	19293	766	0.89	KA 157 R97	4P	1025
	2.2	16288	646	1.05	KF 157 R97	4P	1145
	2.5	14609	580	1.17	KAF157 R97	4P	1085
	2.9	12568	499	1.36			
	3.3	10987	436	1.56			
	2.7	13534	537	0.91	K 127 R87	4P	655
	3.0	11922	473	1.04	KA 127 R87	4P	625
	3.4	10547	419	1.17	KF 127 R87	4P	695
	3.9	9209	365	1.34	KAF127 R87	4P	665
	4.3	8401	333	1.47			
	5.0	7213	286	1.71			
	5.7	6381	253	1.94			
	2.4	15355	609	0.80	K 127 R77	4P	625
	2.7	13449	534	0.82	KA 127 R77	4P	595
	3.1	11676	463	1.06	KF 127 R77	4P	665
	3.4	10644	422	1.16	KAF127 R77	4P	635
	4.0	9109	361	0.83	K 107 R77	4P	430
	4.5	7978	317	0.95	KA 107 R77	4P	405
	5.0	7241	287	1.05	KF 107 R77	4P	440
	5.7	6340	252	1.20	KAF107 R77	4P	425
	6.5	5614	223	1.35			
	7.4	4916	195	1.55			
	8.3	4351	173	1.75			
	9.2	3950	157	1.92			
	10	3458	137	2.2			
	5.4	7138	134.53	1.82	K 127	8P	635
	6.0	6319	119.10	2.1	KA 127	8P	605
	6.4	5968	112.48	2.2	KF 127	8P	575
					KAF127	8P	545
	6.7	5715	143.61	2.3	K 127	6P	606
	7.1	5353	134.53	2.4	KA 127	6P	576
	8.1	4739	119.10	2.7	KF 127	6P	646
	8.5	4476	112.48	2.9	KAF127	6P	616
	6.2	6119	115.32	1.31	K 107	8P	440
	7.1	5392	101.63	1.48	KA 107	8P	415
	8.0	4798	90.43	1.67	KF 107	8P	450
	8.9	4302	81.09	1.86	KAF107	8P	435
	6.7	5679	142.71	1.41	K 107	6P	411
	7.8	4910	123.38	1.63	KA 107	6P	386
	8.3	4589	115.32	1.74	KF 107	6P	421
	9.4	4044	101.63	1:98	KAF107	6P	406
	11	3598	90.43	2.2			
	10	3786	142.71	2.1	K 107	4P	380
	12	3273	123.38	2.4	KA 107	4P	355
	12	3059	115.32	2.6	KF 107	4P	390
	14	2696	101.63	3.0	KAF107	4P	375
	16	2399	90.43	3.3			
	18	2151	81.09	3.7			
	20	1941	73.19	4.1			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
4	9.7	3921	147.79	1.10	K 97 KA 97 KF 97 KAF97	4P 4P 4P 4P	255 235 275 260
	10	3645	137.41	1.18			
	12	3186	120.11	1.35			
	14	2819	106.26	1.53			
	15	2519	94.94	1.71			
	17	2268	85.50	1.90			
	19	2056	77.51	2.1			
	20	1875	70.67	2.3			
	23	1669	62.93	2.6			
	26	1497	56.43	2.9			
	12	3152	118.81	0.86	K 87 KA 87 KF 87 KAF87	4P 4P 4P 4P	175 160 180 175
	14	2789	105.13	0.97			
	17	2237	84.34	1.21			
	18	2126	80.15	1.27			
	21	1838	69.29	1.47			
	23	1677	63.22	1.61			
	25	1515	57.11	1.78			
	29	1318	49.69	2.0			
	33	1161	43.75	2.2			
	39	976	36.77	2.5			
	22	1720	64.82	0.90	K 77 KA 77 KF 77 KAF77	4P 4P 4P 4P	123 115 131 123
	25	1534	57.84	1.01			
	28	1376	51.86	1.13			
	31	1217	45.86	1.27			
	36	1067	40.22	1.45			
	40	943	35.56	1.64			
	46	839	31.64	1.85			
	48	793	29.91	1.95			
	57	674	25.43	2.3			
	61	629	23.72	2.5			
	72	527	19.88	2.9			
	48	793	29.90	1.03	K 67 KA 67 KF 67 KAF67	4P 4P 4P 4P	90 87 95 93
	52	739	27.85	1.11			
	59	645	24.31	1.24			
	63	604	22.77	1.32			
	76	500	18.85	1.58			
	81	471	17.74	1.59			
	91	418	15.75	1.72			
	106	359	13.52	1.81			
	114	334	12.59	1.86			
	140	273	10.29	1.83			
	149	256	9.66	1.87			
	169	226	8.53	1.99			
	202	189	7.12	2.1			
	60	635	23.94	0.94	K 57 KA 57 KF 57 KAF57	4P 4P 4P 4P	82 80 87 85
	64	593	22.34	1.01			
	74	519	19.56	1.16			
	84	457	17.23	1.25			
	94	405	15.25	1.31			
	106	359	13.54	1.48			
	117	325	12.72	1.57			
	129	296	11.14	1.40			
	147	260	9.81	1.56			
	166	230	8.68	1.61			
	187	205	7.71	1.69			
5.5	0.80	62374	1800	0.80	K 187 R97 KA 187 R97	4P 4P	2304 2244
	0.91	54988	1587	0.86			
	1.1	47069	1358	1.01			
	1.2	42630	1230	1.11			
	1.4	36177	1044	1.31			
	1.6	31624	913	1.50			
	2.1	23818	687	1.99			
	2.4	20802	600	2.3			
	1.3	38675	1116	0.80	K 167 R97 KA 167 R97	4P 4P	1584 1544
	1.5	32907	950	0.92			
	1.7	29414	849	1.03			
	2.0	25444	734	1.19			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
5.5	2.3	21778	628	1.40	K 167 R 97	4P	1584
	2.5	19571	565	1.55	KA 167 R97	4P	1544
	2.9	17260	498	1.76			
	3.4	14630	422	2.1			
	2.2	22396	646	0.80	K 157 R97	4P	1084
	2.5	20087	580	0.85	KA 157 R97	4P	1044
	2.9	17282	499	0.99	KF 157 R97	4P	1164
	3.3	15107	436	1.13	KAF157 R97	4P	1104
	3.8	13292	384	1.29			
	3.4	14502	419	0.85	K 127 R87	4P	674
	3.9	12662	365	0.98	KA 127 R87	4P	644
	4.3	11552	333	1.07	KF 127 R87	4P	714
	5.0	9917	286	1.25	KAF127 R87	4P	684
	5.7	8774	253	1.41			
	6.8	7379	213	1.67			
	7.1	7043	203	1.75			
	8.6	5795	167	2.1			
	10	4998	144	2.5			
	6.5	7720	223	0.98	K 107 R77	4P	449
	7.4	6759	195	1.12	KA 107 R77	4P	424
	8.3	5983	173	1.27	KF 107 R77	4P	459
	9.2	5431	157	1.40	KAF107 R77	4P	444
	10	4755	137	1.60			
	4.9	10745	147.29	1.68	K 157	8P	1015
	5.2	10071	138.06	1.79	KA 157	8P	975
	5.9	8916	122.22	2.0	KF 157	8P	1095
	6.6	7962	109.14	2.3	KAF157	8P	1035
	7.3	7160	98.15	2.5			
	5.4	9814	134.53	1.32	K 127	8P	655
	6.0	8688	119.10	1.50	KA 127	8P	625
	6.4	8205	112.48	1.58	KF 127	8P	695
	7.9	6661	91.31	1.95	KAF127	8P	665
	7.1	7361	134.53	1.77	K 127	6P	610
	8.1	6516	119.10	2.0	KA 127	6P	580
	8.5	6154	112.48	2.1	KF 127	6P	650
	11	4996	91.31	2.6	KAF127	6P	620
	10	5206	142.71	1.54	K 107	4P	399
	12	4500	123.38	1.78	KA 107	4P	374
	12	4207	115.32	1.90	KF 107	4P	409
	14	3707	101.63	2.2	KAF107	4P	394
	16	3298	90.43	2.4			
	18	2958	81.09	2.7			
	20	2670	73.19	3.0			
	12	4381	120.11	0.98	K 97	4P	274
	14	3876	106.26	1.11	KA 97	4P	254
	15	3463	94.94	1.24	KF 97	4P	294
	17	3119	85.50	1.38	KAF 97	4P	279
	19	2827	77.51	1.52			
	20	2578	70.67	1.67			
	23	2295	62.93	1.87			
	26	2058	56.43	2.1			
	30	1766	48.42	2.4			
	17	3076	84.34	0.88	K 87	4P	194
	18	2923	80.15	0.92	KA 87	4P	179
	21	2527	69.29	1.07	KF 87	4P	199
	23	2306	63.22	1.17	KAF 87	4P	194
	25	2083	57.11	1.30			
	29	1812	49.69	1.49			
	33	1596	43.75	1.69			
	39	1341	36.77	2.0			
	46	1146	31.41	2.4			
	52	1004	27.53	2.7			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
5.5	31	1673	45.86	0.93	K 77	4P	142
	36	1467	40.22	1.06	KA 77	4P	134
	40	1297	35.56	1.20	KF 77	4P	150
	46	1154	31.64	1.34	KAF77	4P	142
	48	1091	29.91	1.42			
	57	927	25.43	1.67			
	61	865	23.72	1.79			
	72	725	19.88	2.1			
	82	642	17.60	2.4			
	94	559	15.32	2.8			
	59	887	24.31	0.92	K 67	4P	109
	63	830	22.77	0.99	KA 67	4P	106
	76	688	18.85	1.19	KF 67	4P	114
	81	647	17.74	1.27	KAF67	4P	112
	91	575	15.75	1.43			
	106	493	13.52	1.66			
	114	459	12.59	1.79			
	140	375	10.29	2.2			
	149	352	9.66	2.3			
	169	311	8.53	2.6			
	202	260	7.12	3.2			
	84	628	17.23	0.88	K 57	4P	101
	94	556	15.25	0.96	KA 57	4P	99
	106	494	13.54	1.08	KF 57	4P	106
	113	464	12.72	1.10	KAF57	4P	104
	129	406	11.14	1.01			
	147	358	9.81	1.12			
	166	317	8.68	1.23			
	187	281	7.71	1.30			
7.5	1.2	57366	1230	0.83	K 187 R97	4P	2317
	1.4	48656	1044	0.98	KA 187 R97	4P	2257
	1.6	42533	913	1.12			
	2.1	32035	687	1.48			
	2.4	27977	600	1.70			
	2.8	24450	525	1.94			
	1.7	39560	849	0.80	K 167 R97	4P	1597
	2.0	34221	734	0.89	KA 167 R97	4P	1557
	2.3	29291	628	1.04			
	2.6	26322	565	1.15			
	2.9	23213	498	1.31			
	3.5	19677	422	1.54			
	4.0	17196	369	1.77			
	3.3	20318	436	0.84	K 157 R97	4P	1097
	3.8	17878	384	0.96	KA 157 R97	4P	1057
	4.3	15767	338	1.08	KF 157 R97	4P	1177
	5.1	13365	287	1.28	KAF157 R97	4P	1177
	4.4	15536	333	0.80	K 127 R87	4P	687
	5.1	13338	286	0.93	KA 127 R87	4P	657
	5.8	11800	253	1.05	KF 127 R87	4P	727
	6.9	9925	213	1.24	KAF127 R87	4P	692
	7.2	9473	203	1.30			
	8.7	7794	167	1.58			
	10	6722	144	1.84			
	4.5	15805	158.88	2.0	K 167	8P	1532
	5.5	13043	131.11	2.5	KA 167	8P	1492
	6.0	11854	158.88	2.7	K 167	6P	1505
	7.3	9782	131.11	3.3	KA 167	6P	1465
	6.5	10989	147.29	1.64	K 157	6P	1005
	7.0	10300	138.06	1.75	KA 157	6P	965
	7.9	9119	122.22	1.97	KF 157	6P	1085
	8.8	8143	109.14	2.2	KAF157	6P	1025

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
7.5	9.8	7323	98.15	2.5	K 157	6P	1005
	10	6961	93.29	2.6	KA 157	6P	965
	12	5930	79.49	3.0	KF 157	6P	1085
					KAF157	6P	1025
	7.1	10037	134.53	1.30	K 127	6P	645
	8.1	8886	119.10	1.46	KA 127	6P	615
	8.5	8392	112.48	1.55	KF 127	6P	685
	11	6812	91.31	1.91	KAF127	6P	655
	10	7143	143.61	1.82	K 127	4P	607
	11	6692	134.53	1.94	KA 127	4P	577
	12	5924	119.10	2.2	KF 127	4P	647
	13	5595	112.48	2.3	KAF127	4P	617
	16	4542	91.31	2.9			
	17	4132	83.07	3.1			
	20	3620	72.78	3.6			
	10	7099	142.71	1.13	K 107	4P	412
	12	6137	123.38	1.30	KA 107	4P	387
	12	5736	115.32	1.39	KF 107	4P	422
	14	5055	101.63	1.58	KAF107	4P	407
	16	4498	90.43	1.78			
	18	4033	81.09	1.98			
	20	3640	73.19	2.2			
	22	3303	66.41	2.4			
	25	2817	56.63	2.8			
	29	2478	49.83	3.2			
	35	2068	41.58	3.9			
	39	1844	37.07	4.3			
	15	4722	94.94	0.91	K 97	4P	287
	17	4253	85.50	1.01	KA 97	4P	267
	19	3856	77.51	1.12	KF 97	4P	307
	20	3515	70.67	1.22	KAF 97	4P	292
	23	3130	62.93	1.37			
	26	2807	56.43	1.53			
	30	2408	48.42	1.79			
	35	2040	41.01	2.0			
	38	1905	38.31	2.2			
	43	1671	33.59	2.5			
	23	3144	63.22	0.86	K 87	4P	207
	25	2841	57.11	0.95	KA 87	4P	192
	29	2471	49.69	1.09	KF 87	4P	212
	33	2176	43.75	1.24	KAF 87	4P	207
	39	1829	36.77	1.31			
	46	1562	34.41	1.54			
	52	1369	27.53	1.75			
	59	1217	24.47	1.97			
	66	1090	21.92	2.2			
	73	983	19.76	2.3			
	84	850	17.09	2.4			
	88	811	16.31	2.5			
	102	700	14.07	2.9			
	46	1574	31.64	0.98	K 77	4P	155
	48	1488	29.91	1.04	KA 77	4P	147
	57	1265	25.43	1.23	KF 77	4P	163
	61	1180	23.72	1.31	KAF 77	4P	155
	72	989	19.88	1.57			
	82	875	17.60	1.49			
	94	762	15.32	1.71			
	107	669	13.44	1.94			
	114	628	12.62	2.1			
	129	555	11.16	1.62			
	154	465	9.35	1.83			
	173	415	8.34	1.98			
	204	351	7.05	2.3			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N・m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
11	1.7	57572	842	0.83	K 187 R107	4P	2435
	2.0	49818	729	0.95	KA 187 R107	4P	2375
	2.3	43283	633	1.10			
	2.8	35871	525	1.32			
	3.2	31662	463	1.50			
	4.2	23766	348	2.0			
	2.1	46984	687	1.01	K 187 R97	4P	2355
	2.4	41033	600	1.16	KA 187 R97	4P	2295
	2.8	35859	525	1.32			
	4.5	21970	321	1.38	K 167 R107	4P	1715
	5.2	19029	278	1.60	KA 167 R107	4P	1675
	5.9	16924	248	1.80			
	6.6	15018	220	2.0			
	7.1	14154	207	2.1			
	2.6	38605	565	0.80	K 167 R97	4P	1635
	2.9	34046	498	0.89	KA 167 R97	4P	1595
	3.5	28860	422	1.05			
	4.0	25221	369	1.21			
	4.3	23124	338	0.80	K 157 R97	4P	1135
	5.1	19602	287	0.87	KA 157 R97	4P	1095
					KF 157 R97	4P	1215
					KAF157 R97	4P	1155
	6.9	14556	213	0.85	K 127 R87	4P	725
	7.2	13893	203	0.89	KA 127 R87	4P	695
	8.7	11431	167	1.08	KF 127 R87	4P	765
	10	9859	144	1.25	KAF127 R87	4P	735
	5.6	18867	131.11	1.70	K 167	8P	1566
	6.6	15914	110.59	2.0	KA 167	8P	1526
	6.0	17385	158.88	1.84	K 167	6P	1550
	7.3	14347	131.11	2.2	KA 167	6P	1510
	9	11431	158.88	2.7	K 167	4P	1505
	11	9434	131.11	3.2	KA 167	4P	1465
	6.0	17585	122.20	1.02	K 157	8P	1066
	6.7	15700	109.10	1.15	KA 157	8P	1026
	7.4	14131	98.20	1.27	KF 157	8P	1146
	7.8	13426	93.30	1.34	KAF157	8P	1086
	9.2	11440	79.50	1.57			
	7.0	15112	138.10	1.19	K 157	6P	1050
	7.9	13372	122.20	1.35	KA 157	6P	1010
	8.8	11938	109.10	1.51	KF 157	6P	1130
	9.8	10746	98.20	1.68	KAF157	6P	1070
	10	10210	93.30	1.76			
	12	8699	79.50	2.1			
	10	10599	147.30	1.70	K 157	4P	1005
	11	9937	138.10	1.81	KA 157	4P	965
	12	8793	122.20	2.0	KF 157	4P	1085
	13	7850	109.10	2.3	KAF157	4P	1025
	15	7066	98.20	2.5			
	16	6713	93.30	2.7			
	11	9680	134.53	1.34	K 127	4P	645
	12	8569	119.10	1.52	KA 127	4P	615
	13	8093	112.48	1.61	KF 127	4P	685
	16	6570	91.31	1.98	KAF127	4P	655
	18	5977	83.07	2.2			
	20	5237	72.78	2.5			
	13	8298	115.32	0.96	K 107	4P	450
	14	7312	101.63	1.09	KA 107	4P	425
	16	6506	90.43	1.23	KF 107	4P	460
	18	5834	81.09	1.37	KAF107	4P	445

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
11	20	5266	73.19	1.52	K 107	4P	450
	22	4779	66.41	1.67	KA 107	4P	425
	26	4075	56.63	1.96	KF 107	4P	460
	29	3585	49.83	2.2	KAF107	4P	445
	35	2992	41.58	2.4			
	39	2667	37.07	2.7			
	21	5085	70.67	0.85	K 97	4P	325
	23	4528	62.93	0.95	KA 97	4P	305
	26	4060	56.43	1.06	KF 97	4P	345
	30	3484	48.42	1.23	KAF97	4P	330
	36	2950	41.01	1.46			
	38	2756	38.31	1.56			
	43	2417	33.59	1.78			
	46	2267	31.51	1.90			
	52	2002	27.82	2.1			
	59	1773	24.64	2.4			
	67	1573	21.87	2.7			
	33	3148	43.75	0.86	K 87	4P	245
	40	2646	36.77	1.02	KA 87	4P	230
	46	2260	31.41	1.19	KF 87	4P	250
	53	1981	27.53	1.36	KAF87	4P	245
	60	1761	24.47	1.53			
	67	1577	21.92	1.71			
	74	1422	19.76	1.62			
	85	1229	17.09	1.87			
	90	1174	16.31	1.53			
	104	1012	14.07	1.78			
	119	880	12.23	2.0			
	128	823	11.44	1.82			
	146	722	10.03	2.1			
	176	597	8.30	2.2			
	199	528	7.34	2.5			
	62	1707	23.72	0.91	K 77	4P	193
	73	1430	19.88	1.08	KA 77	4P	185
	83	1266	17.60	1.22	KF 77	4P	201
	95	1102	15.32	1.32	KAF77	4P	193
	109	967	13.44	1.34			
	116	908	12.62	1.32			
	131	803	11.16	1.25			
	156	673	9.35	1.26			
	175	600	8.34	1.33			
	207	507	7.05	1.48			
15	2.3	59022	633	0.80	K 187 R107	4P	2444
	2.8	48915	525	0.97	KA 187 R107	4P	2384
	3.2	43175	463	1.10			
	4.2	32408	348	1.47			
	5.6	24490	263	1.94			
	4.5	29960	321	1.01	K 167 R107	4P	1724
	5.2	25949	278	1.17	KA 167 R107	4P	1684
	5.9	23079	248	1.32			
	6.6	20480	220	1.48			
	7.1	19301	207	1.58			
	8.1	16721	179	1.82			
	9.4	14552	156	2.1			
	6.3	21498	231	0.80	K 157 R107	4P	1224
	6.7	20344	218	0.84	KA 157 R107	4P	1184
	7.9	17139	184	1.00	KF 157 R107	4P	1304
	9.5	14334	154	1.19	KAF157 R107	4P	1244
	12	11380	122	1.50			
	13	10286	110	1.66			
	5.4	26600	179.80	1.80	K 187	6P	2300
	5.9	24400	167.86	1.90	KA 187	6P	2240

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
15	7.4	19363	131.11	1.65	K 167	6P	1580
	8.8	16332	110.59	1.96	KA 167	6P	1540
	9.2	15588	158.88	2.1	K 167	4P	1524
	11	12864	131.11	2.5	KA 167	4P	1484
	7.9	18050	122.22	1.00	K 157	6P	1080
	8.9	16118	109.14	1.12	KA 157	6P	1040
	9.9	14495	98.15	1.24	KF 157	6P	1160
	10	13778	93.29	1.31	KAF157	6P	1100
	12	11739	79.49	1.53			
	13	11047	74.80	1.63			
	14	10413	70.51	1.73			
	9.9	14452	147.29	1.25	K 157	4P	1024
	11	13546	138.06	1.33	KA 157	4P	984
	12	11992	122.22	1.50	KF 157	4P	1104
	13	10709	109.14	1.68	KAF157	4P	1044
	15	9631	98.15	1.87			
	16	9154	93.29	2.0			
	18	7799	79.49	2.3			
	11	13200	134.53	0.94	K 127	4P	664
	12	11685	119.10	1.06	KA 127	4P	634
	13	11036	112.48	1.12	KF 127	4P	704
	16	8959	91.31	1.38	KAF127	4P	674
	18	8151	83.07	1.52			
	20	7141	72.78	1.73			
	23	6131	62.49	2.01			
	27	5323	54.25	2.32			
	32	4544	46.31	2.72			
	16	8872	90.43	0.90	K 107	4P	469
	18	7956	81.09	1.01	KA 107	4P	444
	20	7181	73.19	1.11	KF 107	4P	479
	22	6516	66.41	1.23	KAF107	4P	464
	26	5557	56.63	1.44			
	29	4889	49.83	1.64			
	35	4080	41.58	1.96			
	39	3637	37.07	1.98			
	44	3253	33.16	2.2			
	45	3163	32.24	2.2			
	51	2801	28.54	2.5			
	30	4751	48.42	0.91	K 97	4P	344
	36	4023	41.01	1.07	KA 97	4P	324
	38	3759	38.31	1.14	KF 97	4P	364
	43	3296	33.59	1.30	KAF97	4P	349
	46	3092	31.51	1.39			
	52	2730	27.82	1.58			
	59	2418	24.64	1.78			
	67	2146	21.87	2.0			
	76	1895	19.31	2.3			
	87	1644	16.76	2.6			
	46	3082	31.41	0.88	K 87	4P	264
	53	2701	27.53	1.00	KA 87	4P	249
	60	2401	24.47	1.02	KF 87	4P	269
	67	2151	21.92	1.14	KAF87	4P	264
	74	1939	19.76	1.03			
	85	1676	17.09	1.19			
	90	1601	16.31	1.25			
	104	1380	14.07	1.45			
	119	1200	12.23	1.50			
	128	1122	11.44	1.34			
	146	984	10.03	1.52			
	176	815	8.30	1.72			
	199	720	7.34	1.80			
18.5	2.8	59919	525	0.80	K 187 R107	4P	2499
	3.2	52888	463	0.90	KA 187 R107	4P	2439
	4.2	39698	348	1.20			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
18.5	5.6	29998	263	1.58	K 187 R107	4P	2499
	6.7	24936	218	1.90	KA 187 R107	4P	2439
	4.6	36699	321	0.83	K 187 R107	4P	1779
	5.3	31786	278	0.96	KA 187 R107	4P	1739
	5.9	28270	248	1.08			
	6.7	25086	220	1.21			
	7.1	23642	207	1.29			
	8.2	20482	179	1.48			
	9.4	17826	156	1.71			
	11	15017	132	2.0			
	13	12510	110	2.4			
	8.0	20994	184	0.81	K 157 R107	4P	1279
	9.6	17558	154	0.97	KA 157 R107	4P	1239
	12	13940	122	1.23	KF 157 R107	4P	1359
	13	12600	110	1.36	KAF157 R107	4P	1299
	8.4	20999	174.72	2.4	K 187	4P	2289
	9.0	19730	164.16	2.5	KA 187	4P	2229
	10	17556	146.07	2.8			
	11	15760	131.13	3.2			
	11	15758	131.11	2.0	K 167	4P	1569
	13	13291	110.59	2.4	KA 167	4P	1529
	17	10355	86.16	3.1			
	8.9	19879	109.14	0.91	K 157	6P	1121
	9.9	17878	98.15	1.01	KA 157	6P	1081
	10	16992	93.29	1.06	KF 157	6P	1201
	12	14478	79.49	1.24	KAF157	6P	1141
	13	13625	74.80	1.32			
	12	14690	122.22	1.23	K 157	4P	1069
	13	13117	109.14	1.37	KA 157	4P	1029
	15	11797	98.15	1.53	KF 157	4P	1149
	16	11213	93.29	1.61	KAF157	4P	1089
	18	9553	79.49	1.88			
	20	8991	74.80	2.0			
	21	8475	70.51	2.1			
	25	7156	59.54	2.5			
	26	6780	56.41	2.7			
	28	6393	53.19	2.8			
	31	5630	46.84	3.2			
	35	4994	41.56	3.6			
	40	4457	37.08	4.0			
	13	13519	112.48	0.96	K 127	4P	709
	16	10974	91.31	1.18	KA 127	4P	679
	18	9984	83.07	1.30	KF 127	4P	749
	20	8747	72.78	1.49	KAF127	4P	719
	24	7510	62.49	1.73			
	27	6521	54.25	1.99			
	32	5566	46.31	2.3			
	34	5205	43.31	2.5			
	36	4875	40.56	2.7			
	41	4294	35.73	3.0			
	47	3799	31.61	3.4			
	49	3578	29.77	3.6			
	52	3373	28.06	3.9			
	20	8796	73.19	0.91	K 107	4P	514
	22	7982	66.41	1.00	KA 107	4P	489
	26	6807	56.63	1.18	KF 107	4P	524
	30	5989	49.83	1.34	KAF107	4P	509
	35	4998	41.58	1.60			
	40	4455	37.07	1.80			
	44	3985	33.16	2.0			
	46	3875	32.24	1.86			
	52	3430	28.54	2.1			
	55	3234	26.91	2.2			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N・m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
18.5	65	2725	22.68	2.6	K 107	4P	514
	74	2402	19.98	3.0	KA 107	4P	489
	89	1987	16.53	3.5	KF 107	4P	524
					KAF107	4P	509
	36	4928	41.01	0.87	K 97	4P	386
	38	4604	38.31	0.93	KA 97	4P	369
	44	4037	33.59	1.07	KF 97	4P	409
	47	3787	31.51	1.14	KAF97	4P	394
	53	3344	27.82	1.29			
	60	2961	24.64	1.45			
	67	2628	21.87	1.64			
	76	2321	19.31	1.85			
	88	2014	16.76	2.1			
	107	1650	13.73	2.6			
	122	1454	12.10	2.6			
	60	2941	24.47	0.85	K 87	4P	309
	67	2634	21.92	0.87	KA 87	4P	294
	74	2375	19.76	1.01	KF 87	4P	314
	86	2054	17.09	1.07	KAF87	4P	309
	90	1961	16.31	1.12			
	104	1691	14.07	1.30			
	120	1470	12.23	1.50			
	129	1375	11.44	1.09			
	147	1206	10.03	1.04			
	177	998	8.30	1.25			
	200	882	7.34	1.47			
22	3.2	62893	463	0.80	K 187 R107	4P	2510
	4.2	47209	348	1.01	KA 187 R107	4P	2450
	5.6	35674	263	1.33			
	6.7	29653	218	1.60			
	7.6	26373	194	1.80			
	9.1	21846	161	2.2			
	5.3	37799	278	0.80	K 167 R107	4P	1790
	5.9	33618	248	0.90	KA 167 R107	4P	1750
	6.7	29833	220	1.02			
	7.1	28115	207	1.08			
	8.2	24357	179	1.25			
	9.4	21198	156	1.43			
	11	17858	132	1.70			
	13	14877	110	2.0			
	9.6	20880	154	0.82	K 157 R107	4P	1290
	12	16578	122	1.03	KA 157 R107	4P	1250
	13	14984	110	1.14	KF 157 R107	4P	1370
					KAF157 R107	4P	1310
	5.6	37843	174.72	1.32	K 187	6P	2364
	5.9	35558	164.16	1.41	KA 187	6P	2304
	6.6	31639	146.07	1.58			
	7.4	28403	131.13	1.76			
	8.4	24971	174.72	2.0	K 187	4P	2300
	9.0	23463	164.16	2.1	KA 187	4P	2240
	10	20878	146.07	2.4			
	11	18742	131.13	2.7			
	11	18739	131.11	1.71	K 167	4P	1580
	13	25806	110.59	2.0	KA 167	4P	1540
	17	12314	86.16	2.6			
	19	10918	76.39	2.9			
	9.9	21260	98.15	0.85	K 157	6P	1144
	10.4	20207	93.29	0.89	KA 157	6P	1104
	12	17217	79.49	1.05	KF 157	6P	1224
	13	16203	74.80	1.11	KAF157	6P	1164
	14	15273	70.51	1.18			
	16	12897	59.54	1.40			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
22	12	17469	122.22	1.03	K 157 KA 157 KF 157 KAF157	4P 4P 4P 4P	1080 1040 1160 1100
	13	15599	109.14	1.15			
	15	14029	98.15	1.28			
	16	13334	93.29	1.35			
	18	11361	79.49	1.58			
	20	10692	74.80	1.68			
	21	10078	70.51	1.79			
	25	8510	59.54	2.1			
	26	8062	56.41	2.2			
	28	7602	53.19	2.4			
	31	6695	46.84	2.7			
	35	5939	41.56	3.0			
	40	5300	37.08	3.4			
	16	13050	91.31	1.00	K 127 KA 127 KF 127 KAF127	4P 4P 4P 4P	720 690 760 730
	18	11873	83.07	1.09			
	20	10402	72.78	1.25			
	24	8931	62.49	1.46			
	27	7754	54.25	1.68			
	32	6620	46.31	1.96			
	34	6190	43.31	2.1			
	36	5797	40.56	2.2			
	41	5107	35.73	2.5			
	47	4518	31.61	2.9			
	49	4255	29.77	3.1			
	52	4011	28.06	3.2			
	58	3623	25.35	3.6			
	62	3394	23.74	3.8			
	70	2989	20.91	4.3			
	26	8094	56.63	0.99	K 107 KA 107 KF 107 KAF107	4P 4P 4P 4P	525 500 535 520
	30	7122	49.83	1.05			
	35	5943	41.58	1.18			
	40	5298	37.07	1.32			
	44	4739	33.16	1.48			
	46	4608	32.24	1.52			
	52	4079	28.54	1.72			
	55	3846	26.91	1.82			
	65	3241	22.68	2.1			
	74	2856	19.98	2.4			
	89	2363	16.53	2.9			
	100	2097	14.67	3.2			
	112	1869	13.08	2.2			
	126	1672	11.70	2.5			
	151	1396	9.77	2.9			
	47	4504	31.51	0.95	K 97 KA 97 KF 97 KAF97	4P 4P 4P 4P	400 380 420 405
	53	3976	27.82	1.03			
	60	3522	24.64	1.16			
	67	3125	21.87	1.31			
	76	2760	19.31	1.49			
	88	2395	16.76	1.71			
	107	1962	13.73	2.1			
	122	1729	12.10	2.3			
	137	1529	10.70	1.90			
	164	1277	8.94	2.1			
	74	2825	19.76	0.85	K 87 KA 87 KF 87 KAF87	4P 4P 4P 4P	320 305 325 320
	86	2442	17.09	0.98			
	90	2331	16.31	1.03			
	104	2011	14.07	1.09			
	120	1749	12.23	0.94			
	129	1635	11.44	1.01			
	147	1434	10.03	1.05			
	177	1187	8.30	1.18			
	200	1049	7.34	1.24			
30	5.6	48646	263	0.98	K 187 R107 KA 87 R107	4P 4P	2580 2520
	6.7	40436	218	1.17			
	7.6	35964	194	1.32			
	9.1	29791	161	1.59			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
30	6.7	40681	220	0.80	K 167 R107	4P	1860
	7.1	38338	207	0.80	KA 167 R107	4P	1820
	8.2	33214	179	0.82			
	9.4	28906	156	1.05			
	11	24352	132	1.25			
	13	20287	110	1.50			
	8.4	34052	174.72	1.47	K 187	4P	2370
	9.0	31995	164.16	1.56	KA 187	4P	2310
	10	28470	146.07	1.76			
	11	25557	131.13	1.96			
	13	22028	113.03	2.3			
	14	20096	103.11	2.5			
	17	16956	87.00	2.9			
	13	21554	110.59	1.48	K 167	4P	1650
	17	16792	86.16	1.91	KA 167	4P	1610
	19	14888	76.39	2.1			
	22	13288	68.18	2.4			
	24	11925	61.19	2.7			
	15	19130	98.15	0.94	K 157	4P	1150
	16	18183	93.29	0.99	KA 157	4P	1110
	18	15492	79.49	1.16	KF 157	4P	1230
	20	14579	74.80	1.23	KAF157	4P	1170
	21	13743	70.51	1.31			
	23	12263	62.92	1.47			
	25	11605	59.54	1.55			
	28	10367	53.19	1.74			
	31	9130	46.84	1.97			
	35	8099	41.56	2.2			
	40	7227	37.08	2.5			
	42	6839	35.09	2.6			
	47	6106	31.33	2.9			
	20	14185	72.78	0.92	K 127	4P	790
	24	12179	62.49	1.07	KA 127	4P	760
	27	10574	54.25	1.23	KF 127	4P	830
	32	9027	46.31	1.44	KAF127	4P	800
	34	8441	43.31	1.54			
	36	7905	40.56	1.64			
	41	6963	35.73	1.87			
	47	6161	31.61	2.1			
	49	5803	29.77	2.2			
	52	5469	28.06	2.4			
	58	4941	25.35	2.6			
	62	4628	23.74	2.8			
	70	4076	20.91	3.2			
	35	8105	41.58	0.99	K 107	4P	595
	40	7225	37.07	1.11	KA 107	4P	570
	44	6462	33.16	1.24	KF 107	4P	605
	46	6284	32.24	1.27	KAF107	4P	590
	52	5563	28.54	1.44			
	55	5244	26.91	1.53			
	65	4420	22.68	1.63			
	74	3895	19.98	1.85			
	89	3222	16.53	2.2			
	100	2860	14.67	2.4			
	112	2549	13.08	1.57			
	126	2280	11.70	1.75			
	151	1903	9.77	2.1			
	173	1652	8.48	2.4			
	60	4802	24.64	0.90	K 97	4P	470
	67	4262	21.87	1.01	KA 97	4P	450
	76	3763	19.31	1.14	KF 97	4P	490
	88	3266	16.76	1.32	KAF97	4P	475
	107	2675	13.73	1.61			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
30	122	2357	12.10	1.61	K 97	4P	470
	137	2085	10.70	1.34	KA 97	4P	450
	164	1742	8.94	1.61	KF 97	4P	490
37	5.6	29793	263	0.80	KAF97	4P	475
	6.8	49702	218	0.96	K 187 R107	4P	2600
	7.6	44205	194	1.07	KA 187 R107	4P	2540
	9.2	36617	161	1.30			
	8.2	40825	179	0.80	K 167 R107	4P	1880
	9.4	35530	156	0.86	KA 167 R107	4P	1840
	11	29932	132	1.02			
	13	24936	110	1.22			
	8.4	41855	174.72	1.19	K 187	4P	2390
	9.0	39327	164.16	1.27	KA 187	4P	2330
	10	34993	146.07	1.43			
	11	31414	131.13	1.59			
	13	27076	113.03	1.85			
	14	24701	103.11	2.0			
	17	20842	87.00	2.4			
	13	26493	110.59	1.21	K 167	4P	1670
	17	20640	86.16	1.55	KA 167	4P	1630
	19	18299	76.39	1.75			
	22	16333	68.18	1.96			
	24	14657	61.19	2.2			
	30	11666	48.70	2.7			
	16	22349	93.29	0.81	K 157	4P	1170
	19	19042	79.49	0.95	KA 157	4P	1130
	20	17920	74.80	1.00	KF 157	4P	1250
	21	16892	70.51	1.07	KAF157	4P	1190
	23	15073	62.92	1.19			
	25	14264	59.54	1.26			
	28	12742	53.19	1.41			
	31	11222	46.84	1.60			
	35	9955	41.56	1.81			
	40	8883	37.08	2.0			
	42	8406	35.09	2.1			
	47	7505	31.33	2.4			
	24	14970	62.49	0.87	K 127	4P	810
	27	12997	54.25	1.00	KA 127	4P	780
	32	11095	46.31	1.17	KF 127	4P	850
	34	10375	43.31	1.25	KAF127	4P	820
	36	9717	40.56	1.34			
	41	8559	35.73	1.52			
	47	7573	31.61	1.72			
	50	7133	29.77	1.82			
	53	6723	28.06	1.93			
	58	6073	25.35	2.1			
	62	5688	23.74	2.3			
	71	5010	20.91	2.6			
	85	4175	17.43	3.1			
	92	3848	16.06	3.2			
	104	3389	14.15	3.5			
	118	2999	12.52	2.8			
	141	2510	10.48	3.2			
	167	2111	8.81	3.4			
	40	8880	37.07	0.81	K 107	4P	615
	44	7943	33.16	0.91	KA 107	4P	590
	46	7724	32.24	0.88	KF 107	4P	625
	52	6838	28.54	1.05	KAF107	4P	610
	55	6446	26.91	1.12			
	65	5432	22.68	1.33			
	74	4787	19.98	1.50			
	89	3960	16.53	1.77			
	101	3515	14.67	1.93			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
37	113	3133	13.08	1.37	K 107	4P	615
	126	2803	11.70	1.53	KA 107	4P	590
	151	2340	9.77	1.79	KF 107	4P	625
	174	2031	8.48	2.0	KAF107	4P	610
45	6.8	60449	218	0.80	K 187 R107	4P	2655
	7.6	53763	194	0.88	KA 187 R107	4P	2595
	9.2	44534	161	1.07			
	11	36404	132	0.84	K 167 R107	4P	1935
	13	30327	110	1.00	KA 167 R107	4P	1895
	8.4	50905	174.72	0.98	K 187	4P	2445
	9.0	47830	164.16	1.05	KA 187	4P	2385
	10	42560	146.07	1.17			
	11	38206	131·13	1.31			
	13	32931	113.03	1.52			
	14	30042	103.11	1.66			
	17	25348	87.00	1.97			
	20	21697	74.47	2.3			
	13	32221	110.59	0.99	K 167	4P	1725
	17	25103	86.16	1.27	KA 167	4P	1685
	19	22256	76.39	1.44			
	22	19864	68.18	1.61			
	24	17827	61.19	1.80			
	30	14189	48.70	2.3			
	35	12290	42.18	2.6			
	21	20544	70.51	0.88	K 157	4P	1225
	23	18332	62.92	0.98	KA 157	4P	1185
	25	17349	59.54	1.04	KF 157	4P	1305
	28	15498	53.19	1.16	KAF157	4P	1245
	31	13648	46.84	1.32			
	35	12107	41.56	1.49			
	40	10804	37.08	1.67			
	42	10224	35.09	1.76			
	47	9128	31.33	1.97			
	53	8069	27.70	2.2			
	63	6787	23.30	2.7			
	67	6423	22.05	2.8			
	78	5477	18.80	3.3			
	32	13494	46.31	0.96	K 127	4P	865
	34	12618	43.31	1.03	KA 127	4P	835
	36	11818	40.56	1.10	KF 127	4P	905
	41	10410	35.73	1.25	KAF127	4P	875
	47	9210	31.61	1.41			
	50	8675	29.77	1.50			
	53	8176	28.06	1.59			
	58	7386	25.35	1.76			
	62	6918	23.74	1.88			
	71	6094	20.91	2.1			
	85	5078	17.43	2.6			
	92	4679	16.06	2.7			
	104	4122	14.15	2.9			
	118	3647	12.52	2.3			
	141	3053	10.48	2.6			
	167	2568	8.81	2.8			
	52	8316	28.54	0.87	K 107	4P	670
	55	7839	26.91	0.92	KA 107	4P	645
	65	6607	22.68	1.09	KF 107	4P	680
	74	5822	19.98	1.24	KAF107	4P	665
	89	4816	16.53	1.46			
	101	4275	14.67	1.59			
	113	3811	13.08	1.12			
	126	3409	11.70	1.25			
	151	2845	9.77	1.46			
	174	2470	8.48	1.62			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
55	10	51841	146.07	0.96	K 187	4P	2560
	11	46538	131.13	1.07	KA 187	4P	2500
	13	40113	113.03	1.25			
	14	36594	103.11	1.37			
	17	30876	87.00	1.62			
	20	26429	74.47	1.89			
	23	22871	64.44	2.2			
	17	30578	86.16	1.05	K 167	4P	1840
	19	27109	76.39	1.18	KA 167	4P	1800
	22	24196	68.18	1.32			
	24	21715	61.19	1.47			
	30	17283	48.70	1.85			
	35	14971	42.18	2.1			
	44	11815	33.29	2.7			
	24	22330	62.92	0.81	K 157	4P	1340
	25	21132	59.54	0.85	KA 157	4P	1300
	28	18877	53.19	0.95	KF 157	4P	1420
	32	16625	46.84	1.08	KAF157	4P	1360
	36	14748	41.56	1.22			
	40	13160	37.08	1.37			
	42	12454	35.09	1.45			
	47	11118	31.33	1.62			
	53	9829	27.70	1.83			
	64	8268	23.30	2.2			
	67	7824	22.05	2.3			
	79	6671	18.80	2.7			
	99	5318	14.98	3.4			
	114	4596	12.95	3.9			
	36	14395	40.56	0.90	K 127	4P	980
	41	12680	35.73	1.03	KA 127	4P	950
	47	11219	31.61	1.16	KF 127	4P	1020
	50	10567	29.77	1.23	KAF127	4P	990
	53	9959	28.06	1.31			
	58	8997	25.35	1.44			
	62	8426	23.74	1.54			
	71	7422	20.91	1.75			
	85	6185	17.43	2.1			
	92	5700	16.06	2.2			
	105	5021	14.15	2.4			
	118	4442	12.52	1.91			
	141	3719	10.48	2.2			
	168	3127	8.81	2.3			
75	11	63461	131.13	0.80	K 187	4P	2644
	13	54699	113.03	0.91	KA 187	4P	2584
	14	49901	103.11	1.00			
	17	42104	87.00	1.19			
	20	36040	74.47	1.39			
	23	31188	64.44	1.60			
	28	25493	52.68	1.96			
	32	22455	64.40	2.2			
	19	36967	76.39	0.87	K 167	4P	1924
	22	32995	68.18	0.97	KA 167	4P	1884
	24	29611	61.19	1.08			
	30	23568	48.70	1.36			
	35	20415	42.18	1.57			
	44	16111	33.29	1.99			
	51	13956	28.84	2.3			
	59	12145	25.10	2.6			
	40	17945	37.08	1.00	K 157	4P	1424
	42	16983	35.09	1.06	KA 157	4P	1384
	47	15162	31.33	1.19	KF 157	4P	1504
	53	13404	27.70	1.34	KAF157	4P	1444
	64	11274	23.30	1.60			
	67	10669	22.05	1.69			
	79	9097	18.80	1.98			
	99	7251	14.98	2.5			
	114	6267	12.95	2.9			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
75	47	15299	31.61	0.85	K 127	4P	1064
	50	14409	29.77	0.90	KA 127	4P	1034
	53	13581	28.06	0.96	KF 127	4P	1104
	58	12269	25.35	1.06	KAF127	4P	1074
	62	11491	23.74	1.13			
	71	10122	20.91	1.28			
	85	8435	17.43	1.54			
	92	7773	16.06	1.61			
	105	6847	14.15	1.75			
	118	6058	12.52	1.40			
	141	5072	10.48	1.58			
	168	4265	8.81	1.70			
90	17	50525	87.00	0.99	K 187	4P	2702
	20	43247	74.47	1.16	KA 187	4P	2642
	23	37426	64.44	1.34			
	28	30591	52.68	1.63			
	32	26946	46.40	1.86			
	34	25334	43.62	1.97			
	38	22455	38.67	2.2			
	24	35533	61.19	0.90	K 167	4P	1982
	30	28281	48.70	1.13	KA 167	4P	1942
	35	24498	42.18	1.31			
	44	19334	33.29	1.66			
	51	16747	28.84	1.91			
	59	14575	25.10	2.2			
	71	12143	20.91	2.6			
	88	9809	16.89	3.1			
	40	21534	37.08	0.84	K 157	4P	1482
	42	20379	35.09	0.88	KA 157	4P	1442
	47	18194	31.33	0.99	KF 157	4P	1562
	53	16084	27.70	1.12	KAF157	4P	1502
	64	13529	23.30	1.33			
	67	12803	22.05	1.41			
	79	10916	18.80	1.65			
	99	8701	14.98	2.1			
	114	7520	12.95	2.2			
	62	13789	23.74	0.94	K 127	4P	1122
	71	12146	20.91	1.07	KA 127	4P	1092
	85	10122	17.43	1.28	KF 127	4P	1162
	92	9327	16.06	1.29	KAF127	4P	1132
	105	8216	14.15	1.46			
	118	7269	12.52	1.17			
	141	6086	10.48	1.31			
	168	5118	8.81	1.41			
110	17	61752	87.00	0.81	K 187	4P	3040
	20	52858	74.47	0.95	KA 187	4P	2980
	23	45742	64.44	1.09			
	28	37390	52.68	1.34			
	32	32935	46.44	1.52			
	34	30964	43.62	1.61			
	38	27445	38.67	1.82			
	45	23490	33.09	2.1			
	54	19453	27.41	2.6			
	30	34566	48.70	0.93	K 167	4P	2320
	35	29942	42.18	1.07	KA 167	4P	2280
	44	23630	33.29	1.35			
	44	23630	33.29	1.35			
	51	20469	28.84	1.56			
	59	17813	25.10	1.80			
	71	14845	20.91	2.2			
	88	11991	16.89	2.7			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
110	53	19659	27.70	0.92	K 157	4P	1820
	64	16535	23.30	1.09	KA 157	4P	1780
	67	15648	22.05	1.15	KF 157	4P	1900
	79	13342	18.80	1.35	KAF157	4P	1840
	99	10635	14.98	1.69			
	114	9191	12.95	1.85			
132	20	63430	74.47	0.80	K 187	4P	3140
	23	54891	64.44	0.91	KA 187	4P	3080
	28	44867	52.68	1.11			
	32	39522	46.40	1.27			
	34	37157	43.62	1.35			
	38	32935	38.67	1.52			
	45	28188	33.09	1.77			
	54	23344	27.41	2.1			
	61	20691	24.29	2.3			
	71	17709	20.79	2.5			
	86	14665	17.22	2.8			
	35	35930	42.18	0.89	K 167	4P	2420
	44	28356	33.29	1.13	KA 167	4P	2380
	51	24562	28.84	1.30			
	59	21376	25.10	1.50			
	71	17814	20.91	1.80			
	88	14389	16.89	2.2			
	64	19842	23.30	0.91	K 157	4P	1920
	67	18778	22.05	0.96	KA 157	4P	1880
	79	16011	18.80	1.12	KF 157	4P	2000
	99	12762	14.98	1.41	KAF157	4P	1940
	114	11030	12.95	1.54			
160	28	54385	52.68	0.92	K 187	4P	3260
	32	47905	46.40	1.04	KA 187	4P	3200
	34	45039	43.62	1.11			
	38	39921	38.67	1.25			
	45	24167	33.09	1.46			
	54	28295	27.41	1.77			
	61	25080	24.29	1.99			
	71	21465	20.79	2.3			
	86	17776	17.22	2.8			
	44	34371	33.29	0.93	K 167	4P	2440
	51	29773	28.84	1.07	KA 167	4P	2400
	59	25910	25.10	1.24			
	71	21593	20.91	1.48			
	88	17441	16.89	1.83			
	79	19407	18.80	0.93	K 157	4P	1940
	99	15469	14.98	1.16	KA 157	4P	1900
	114	13369	12.95	1.35	KF 157	4P	2020
					KAF157	4P	1960
200	32	59881	46.40	0.83	K 187	4P	3210
	34	56298	43.62	0.89	KA 187	4P	3150
	38	49901	38.67	1.0			
	45	42709	33.09	1.17			
	54	35369	27.41	1.41			
	61	31350	24.29	1.52			
	71	26831	20.79	1.62			
	86	22220	17.22	1.85			
	59	32388	25.10	0.99	K 167	4P	2490
	71	26992	20.91	1.19	KA 167	4P	2450
	88	21801	16.89	1.47			
	99	19336	14.98	0.93	K 157	4P	1990
	144	16711	12.95	1.02	KA 157	4P	1950
					KF 157	4P	2070
					KAF157	4P	2010

三、K系列减速机的安装尺寸、输出轴尺寸及外形尺寸表
Mounting dimensions、output shaft dimensions and overview dimension of K series reducer

1、 K底脚轴伸式安装圆弧锥齿减速机
K Foot-mounted helical-bevel gear reducer with solid shaft

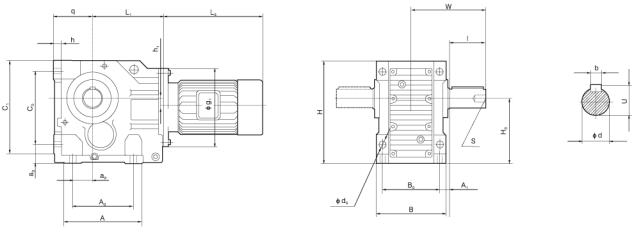

机型号 model	安装尺寸 mounting dimensions				输出轴尺寸 output shaft dimensions				外形尺寸 external dimensions			
	H_s	A_1	C_2	a_3				b	B	L_1	W	A
	q	A_s	B_s	a_2				c	H	h	h_1	C_1
K37	$100_{-0.5}$	10	115	32	11	25k6	50	M10	8	120	139	110	143
	$63_{-0.5}$	110	100	28					28	165	16	8.5	150
K47	$112_{-0.5}$	15	130	37	11	30k6	60	M10	8	145	166	135	162
	$71_{-0.5}$	130	120	35					33	185	18	7.2	170
K57	$132_{-0.5}$	18	150	45	13.5	35k6	70	M12	10	157	173	153	172
	$80_{-0.5}$	130	130	30					38	217	21	13.1	190
K67	$140_{-0.5}$	21	160	45	13.5	40k6	80	M16	12	170	179	171	170
	$90_{-0.5}$	120	140	30					43	228	24	20	203
K77	$180_{-0.5}$	23.5	200	55	17.5	50k6	100	M16	14	200	202	206	208
	$112_{-0.5}$	150	165	40					53.5	288	27	31.3	263
K87	$212_{-0.5}$	30	233	70	22	60m6	120	M20	18	230	257	240	260
	$132_{-0.5}$	180	180	55					64	340	32	25.9	305
K97	265_{-1}	31	295	75	26	70m6	140	M20	20	290	277	291	294
	$160_{-0.5}$	240	240	75					74.5	417	36	32.3	372
K107	315_{-1}	42	360	95	33	90m6	170	M24	2,5	340	341	347	380
	$200_{-0.5}$	280	270	95					95	503	40	52	448
K127	375_{-1}	43	420	110	39	110m6	210	M24	28	400	410	417	440
	$225_{-0.5}$	350	330	115					116	592	45	53	526
K157	450_{-1}	37	500	130	39	120m6	210	M24	32	500	426	457	480
	280_{-1}	380	420	140					127	705	50	71.7	634

2、KAB底脚空心轴安装圆弧锥齿轮减速机
KAB Foot-mounted helical-bevel gear reducer with hollow shaft

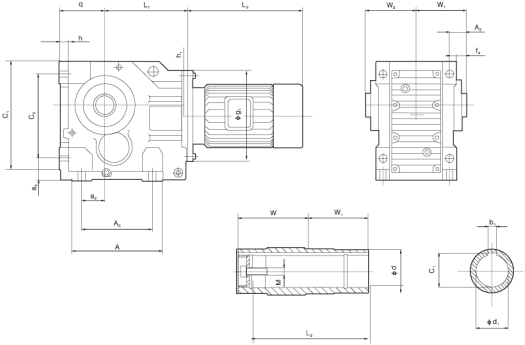

机型号 model	安装尺寸 mounting dimensions					外形尺寸 external dimensions					
	W_1	W_2	f_4	A_2	M	d_1	c_1	b_1	L_2	d	g_1
KAB47	75	78	3	15	M12×30	35H7	38.3	10	130	50	160
KAB57	83	86	3	18	M16×40	40H7	43.3	12	142	55	160
KAB67	90	93	3.5	20	M16×40	40H7	43.3	12	156	55	160
KAB77	105	108	4	22.5	M16×40	50H7	53.8	14	183	70	200
KAB87	120	123	4	30	M20×50	60H7	64.4	18	210	85	250
KAB97	150	153	4	30	M20×50	70H7	74.9	20	270	95	300
KAB107	175	178	2.5	40	M24×60	90H7	95.4	25	310	118	350
KAB127	205	208	2.5	40	M24×60	100H7	106.4	28	370	135	450
KAB157	250	253	0	40	M24×60	120H7	127.4	32	457	155	550

注：其余尺寸请参见SK..
Note:the rest dimensions,please see SK..as a refereence

3、KA空心轴安装圆弧锥齿轮减速机
KA Helical-bevel gear reducer with hollow shaft

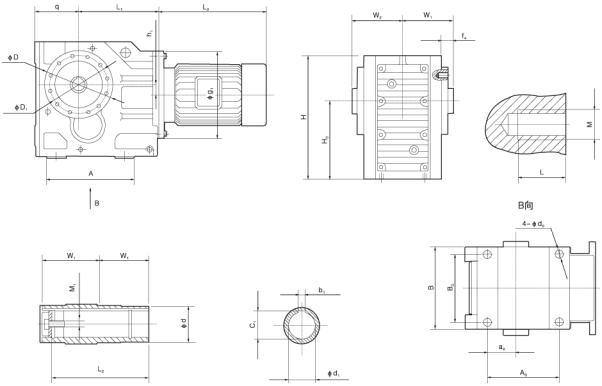

机型号 model	安装尺寸 mounting dimensions				输出轴尺寸 output shaft dimensions				外形尺寸 external dimensions						
	H_6	B_0	A_0	d_0	d_1	b_1	L_2	M_1	B	q	H	W_1	H_1	W_2
		a_2			d	c_1				L_1	g_1	f_4	A	
KA37	$100_{-0.5}$	60	117	M10×20	30H7	8	105	M10×25	100	71	164	60	8.5	63
		35			45	33.3				139	120	2.5	147	
KA47	$112_{-0.5}$	70	140	M10×20	35H7	10	130	M12×25	110	77	185	75	7.2	78
		40			50	38.3				166	160	3	170	
KA57	$132_{-0.5}$	88	152	M12×25	40H7	12	142	M16×40	122	96	215	83	13.1	86
		47			55	43.3				173	160	3	182	
KA67	$140_{-0.5}$	88	152	M12×25	40H7	12	156	M16×40	130	95	226	90	20	94
		42			55	43.3				179	160	3,5	182	
KA77	$180_{-0.5}$	102	170	M16×32	50H7	14	183	M16×40	154	110	286	105	31.3	108
		48			70	53,8				202	200	4	204	
KA87	$212_{-0.5}$	118	225	M16×32	60H7	18	210	M20×50	170	133	338	120	25.9	123
		65			85	64.4				257	250	4	280	
KA97	$265_{-0.1}$	160	248	M20×36	70H7	20	270	M20×50	226	158	414	150	32.3	153
		83			95	74.9				277	300	4	298	
KA107	$315_{-0.1}$	190	290	M24×44	90H7	25	310	M24×60	266	196	500	175	52	178
		100			118	95.4				341	350	2.5	370	
KA127	$375_{-0.1}$	330	350	39	110m6	28	370	M24×60	400	225	592	205	53	208
		115			135	106.4				410	450	2.5	440	
KA157	$450_{-0.1}$	420	380	39	120m6	32	457	M24×60	500	280	705	250	71.7	253
		140			155	127.4				426	550	0	480	

注：D、D_1、L、M尺寸请参见KAZ..
Note:D、D_1、L、M dimensions please see KAZ.. as a reference

4、KF法兰轴伸式安装圆弧级齿轮减速机
KF Flange-mounted helical-bevel gear reducer with solid shaft

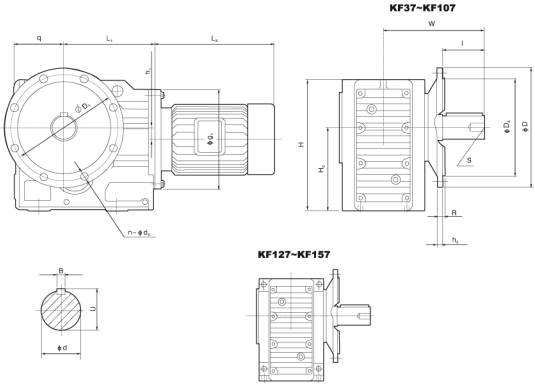

机型号 model	安装尺寸 mounting dimensions							输出轴尺寸 output shaft dimensions				外形尺寸 external dimensions					
	H_0	S	R	D_1	n	d_0	D_2	b	d	l	U	L_1	W	D	h_1	h_2	H
KF37	100	M10	3.5	130	4	9	110j6	8	25k6	50	28	139	134	160	8.5	10	164
KF47	112	M10	3.5	165	4	11	130j6	8	30k6	60	33	166	160	200	7.2	10	185
KF57	132	M12	4	215	4	13.5	180j6	10	35k6	70	38	173	177	250	13.1	15	215
KF67	140	M16	4	215	4	13.5	180j6	12	40k6	80	43	179	193	250	20	15	226
KF77	180	M16	4	265	4	13.5	230j6	14	50k6	100	53.5	202	242	300	31.3	16	286
KF87	212	M20	5	300	4	17.5	250h6	18	60m6	120	64	277	270	350	25.9	18	338
KF97	265	M20	5	400	8	17,5	350h6	20	70m6	140	74.5	257	332	450	32.3	22	414
KF107	315	M24	5	400	8	17.5	350h6	25	90m6	170	95	341	386	450	52	22	500
KF127	375	M24	5	500	8	17.5	450h6	28	110m6	210	116	390	466	550	53	25	592
KF157	450	M24	6	600	8	22	550h6	32	120m6	210	127	426	520	660	71.7	28	705

注：其余尺寸请参见KA..
Note:the rest dimensions,please see KA..as a refereence

5、KAF法兰空心轴安装圆弧锥齿轮减速器
KAF Flange-mounted helical-bevel gear reducer with hollow shaft



KAF37~KAF107







KAF127~KAF157



机型号 model	安装尺寸 mounting dimensions							输出轴尺寸 output shaft dimensions				外形尺寸 external dimensions			
	L_2	D_1	R	D_2	n	d_4	M	b_1	d_1	l_1	c_1	D	h_2	W_1	g_1
KAF37	105	130	3.5	110j6	4	9	M10×25	8	30H7	24	33.3	160	10	60	120
KAF47	130	165	3.5	130j6	4	11	M10×25	10	35H7	25	38.3	200	10	75	160
KAF57	142	215	4	180j6	4	13.5	M16×40	12	40H7	23.5	43.3	250	15	83	160
KAF67	156	215	4	180j6	4	13.5	M16×40	12	40H7	23	43.3	250	15	90	160
KAF77	183	265	4	230j6	4	13.5	M16×40	14	50H7	37	53.8	300	16	105	200
KAF87	210	300	5	25oj8	4	17.5	M20×50	18	60H7	30	64.4	350	18	120	250
KAF97	270	400	5	35oj6	8	17.5	M20×50	20	70H7	41.5	74.9	450	22	150	300
KAF107	310	400	5	35oj6	8	17.5	M24×60	25	90H7	41	95.4	450	22	175	350
KAF127	370	500	5	450h6	8	17.5	M24×60	28	100H7	51	106.4	550	25	205	450
KAF157	457	600	6	550h6	8	22	M24×60	32	120H7	60	127.4	660	28	250	550

注：其余尺寸请参见KA..
Note:the rest dimensions,please see KA..as a refereence

5、KAF小法兰空心轴安装圆弧锥齿轮减速器
KAF Short-flange-mounted helical-bevel gear reducer with hollow shaft

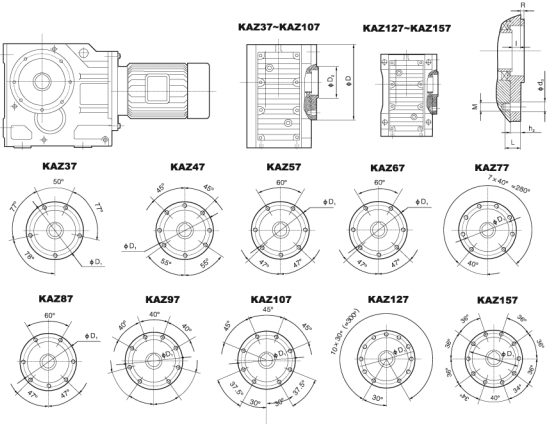

机型号 model	安装尺寸 mounting dimensions					输出轴尺寸 output shaft dimensions	外形尺寸 external dimensions		
	L	D_1	D_2	M	R	l	d_0	h_2	D
KAZ37	12	94	80j6	M8	3	9	9	11.5	110
KAZ47	12	102	80j6	M8	3	8.5	9	11	120
KAZ57	20	125	105j6	M12	3.5	9	13.5	12	155
KAZ67	20	125	105j6	M12	3.5	8.5	13.5	12	155
KAZ77	20	142	125j6	M12	3.5	10	13.5	14	170
KAZ87	26	178	155j6	M16	4	11	17.5	15	215
KAZ97	26	220	180j6	M16	4	14	17.5	18	260
KAZ107	30	260	210j6	M20	4	8	22	22	304
KAZ127	28	300	250h6	M20	5	10	22	30	350
KAZ157	36	340	290h6	M24	5	14	26	28	400

注：其余尺寸请参见KA..带*表示高出法兰结合面。
Note:the rest dimensions,please see KA..as a refereence,the * means over the flange connection face

7、KAT带防转臂空心轴安装圆弧维齿轮减速机
KAT Torque-arm-mounted helical-bevel gear reducer with hollow shaft







机型号 model	安装尺寸 mounting dimensions				外形尺寸 external dimensions							
	L_5	β	C_8	R	P	I	H_0	d_1	L_4	a_4	d_2	
									0 −0.3			0 −0.3
KAT37	31	60°	10	22.5	140	20	100−0.5	10.4±0.1	36	23.5	26	
KAT47	31	55°	12	22.5	160	20	112−0.5	10.4±0.1	36	30	26	
KAT57	54	55°	13	29	192	18	132−0.5	16.4±0.08	60	40	40	
KAT67	54	55°	13	29	200	25	140−0.5	16.4±0.08	60	45	40	
KAT77	54	60°	14	29	250	25	180−0.5	16.4±0.08	60	52.5	40	
KAT87	72	60°	16	41	300	30	212−0.5	25±0.08	80	60	60	
KAT97	92	50°	17	41	350	40	265−1	25±0.08	100	70	60	
KAT107	92	55°	20	41	450	45	315−1	25±0.08	100	74	60	
KAT127	110	65°	45	70	550	7	375−1	40±0.08	126	60		
KAT157	110	70°	45	70	700	2	450−1	40±0.08	126	50		

注：其余尺寸请参见KA..
Note:the rest dimensions,please see KA..as a refereence

K167











KA167







K SERIES

KA187











KA187







K SERIES

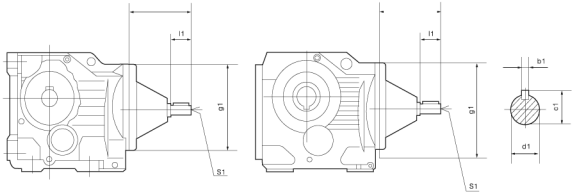

型号 Type	d1	L1	l1	S1	c1	b1	g1
K..S37	16k6	115	40	M5	18	5	120
K.,S47	19k6	120	40	M6	21.5	6	160
K..S57	19k6	120	40	M6	21.5	6	160
K..S67	19k6	120	40	M6	21.5	6	160
K..S77	24k6	140	50	M8	27	8	200
K..S87	28k6	180	60	M10	31	8	250
K..S97	38k6	220	80	M12	41	10	300
K..S107	42k6	270	110	M16	45	12	350
K..S127	55m6	297	110	M20	59	16	450
K..S157	70m6	374	140	M20	74.5	20	550

注：其它尺寸请参见K型第129页到137页
Note:The other size refers to page 129–137

8、K（KF、KA、KAF、KAB）..R..组合式圆弧锥齿轮减速机
Combination type of helical-bevel gear reducer

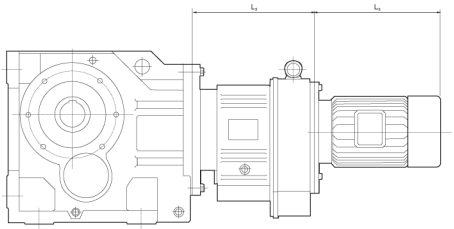

型号 model	电机机座号 motor type	L_2	L_3
K..47R37 K..57R37 K..67R37 K..77R37	Y63	157	≤208
	Y71	157	≤266
	Y80	157	≤272
	Y90	157	≤320
K..87R57 K..97R57	Y63	187	≤198
	Y71	187	≤266
	Y80	187	≤272
	Y90	187	≤320
	Y100L	187	≤350
	Y112M	187	≤375
K..107R77 K..127R77	Y63	220	≤198
	Y71	220	≤266
	Y80	220	≤248
	Y90	220	≤295
	Y100L	220	≤350
	Y112M	220	≤375
	Y132M	220	≤465
	Y160M	220	≤600

型号 model	电机机座号 motor type	L_2	L_3
K..127R87	Y90	272	≤295
	Y100L	272	≤320
	Y112M	272	≤340
	Y132	272	≤465
	Y160	272	≤600
	Y180	272	≤665
K..157R97 K..167R97 K..187R97	Y80	320	≤248
	Y90	320	≤295
	Y100L	320	≤320
	Y112M	320	≤340
	Y132	320	≤425
	Y160	320	≤600
	Y180	320	≤665
	Y200L	320	≤675
K..157R107 K,.167R107 K..187R107	Y100L	355	≤320
	Y112M	355	≤340
	Y132M	355	≤425
	Y160	355	≤560
	Y180	355	≤620
	Y200L	355	≤675
	Y225	355	≤740