上海巨能
Shang Hai Juneng

05

Page(050~122)

R系列
R Series

斜齿轮硬齿面减速机
HELICAL GEAR REDUCTOR

www.sh-juneng.com

R系列结构图：/ R series structure drawing

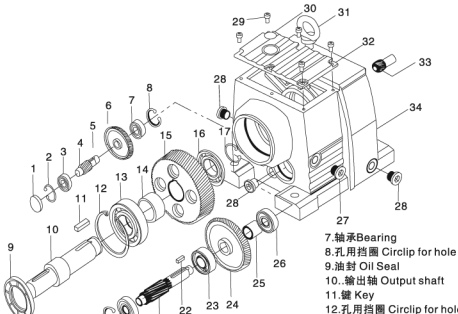

1.封盖 Grand
2.孔用挡圈 Circlip for hole
3.轴承 Bearing
4.齿轮轴 Gearing
5.键 Key
6.齿轮 Gear
7.轴承Bearing
8.孔用挡圈 Circlip for hole
9.油封 Oil Seal
10..输出轴 Output shaft
11.键 Key
12.孔用挡圈 Circlip for hole
13.轴承 Bearing
14.轴套 Shaft sleeve
15.齿轮
16.轴承Bearing
17.孔用挡圈 Circlip for hole
18.封盖 Grand
19.孔用挡圈 Circlip for hole
20.轴承 Bearing
21.齿轮轴 Gearing
22.键 Key
23.轴承 Bearing
24.齿轮 Gear
25.轴套 Shaft sleeve
26.轴承 Bearing
27.油镜 oil gauge
28.螺塞 Oil plug
29.螺钉 Screw
30.箱体 Housing
29.通气帽 Breather
31.吊环 Bolteye
32.箱盖 Cover plate
33.齿轮 Gear
34.箱体 Housing

RX系列结构图：/ RX series structure drawing

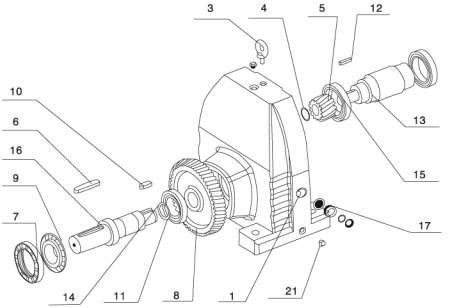

1.箱体 Housing
2.通气帽 Breather
3.吊环 Bolteye
4.轴用挡圈 circlip for shaft
5.小齿轮 Stage pinion
6.平键 Parallel key
7.油封 Seal
8.大齿轮 Stage driven
9.轴承 Bearing
10.平键 Parellel key
11.轴用挡圈 Circlip for shaft
12.平键 Parallel key
13.输入轴 Input shaft
14.轴承 Bearing
15.轴承 Bearing
16.输出轴 Output shaft
17.油镜 Oilgauge

七、R系列减速机型号类别 The models of R series reducers



RX..Y..
单级底脚安装斜齿轮减速电机

RX..Y..
Foot-mounted single-stage helical gear unit with solid shaft



RF..Y..
法兰安装斜齿轮减速电机

RF..Y..
Flange-moundted helical gear unit with solid shaft



RXF..Y..
单级法兰安装斜齿轮减速电机

RXF..Y..
Flange-mounted single-stage helical gear unit with solid shaft



R..F..Y..
底脚法兰安装斜齿轮减速电机

R..F..Y..
Foot flange helical gear reducer



R..Y..
底脚安装斜齿轮减速电机

R..Y..
Foot-mounted helical gear unit with solid shaft



R..R..Y..
组合式斜齿轮减速电机

R..R..Y..
Combination type of helical gear reducer

注：如需要其它类型减速机，请向我们咨询。
Note:If other types are needed, please contact us.

八、R系列减速机安装方位及电机接线盒位置及选型参数
Mounting position and motor terminal box position for R series reducer

R\RX

B3



V5



V6



B4



B7

B8



RF\RXF

B5



B6



V1



V3





电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.18	0.13	11574	11010	1.07	R147 R77	4P	542
	0.14	10185	9689	1.21	RF147 R77	4P	552
	0.16	8997	8559	1.37			
	0.18	7918	7532	1.56			
	0.22	6724	6397	1.84			
	0.25	5787	5505	2.1			
	0.28	5154	4903	2.4			
	0.32	4551	4329	2.7			
	0.37	3956	3763	3.1			
	0.42	3510	3339	3.5			
	0.16	9213	8764	0.82	R 137 R77	4P	362
	0.18	8009	7619	0.95	RF137 R77	4P	382
	0.21	6992	6652	1.09			
	0.23	6255	5951	1.21			
	0.27	5438	5173	1.40			
	0.30	4947	4706	1.54			
	0.31	4714	4484	1.61			
	0.35	4206	4002	1.81			
	0.35	4142	3941	1.83			
	0.40	3689	3509	2.1			
	0.42	3478	3308	2.2			
	0.46	3146	2993	2.4			
	0.31	4658	4431	0.88	R107 R77	4P	262
	0.35	4201	3996	0.97	RFI07 R77	4P	267
	0.36	4004	3809	1.02			
	0.42	3501	3330	1.17			
	0.45	3250	3092	1.26			
	0.46	3167	3013	1.29			
	0.53	2753	2619	1.48			
	0.61	2395	2278	1.71			
	0.68	2143	2038	1.91			
	0.51	2858	2719	1.00	R97 R57	4P	168
	0.52	2787	2651	1.02	RF97 R57	4P	183
	0.60	2450	2330	1.16			
	0.62	2361	2246	1.21			
	0.66	2204	2097	1.29			
	0.68	2134	2030	1.34			
	0.81	1811	1723	1.57			
	0.85	1725	1641	1.65			
	0.98	1495	1422	1.91			
	1.2	1261	1199	2.3			
	1.3	1150	1094	2.5			
	1.5	987	939	2.9			
	1.6	926	881	3.1			
	1.8	792	753	3.6			
	0.80	1831	1742	0.80	R 87 R57	4P	118
	0.80	1829	1740	0.80	RF87 R57	4P	125
	0.91	1601	1523	0.92			
	0.94	1554	1478	0.95			
	1.0	1465	1394	1.00			
	1.1	1383	1316	1.06			
	1.1	1307	1244	1.13			
	1.2	1237	1176	1.19			
	1.4	1081	1028	1.36			
	1.5	980	932	1.50			
	1.6	930	885	1.58			
	1.7	845	804	1.74			
	1.8	826	786	1.78			
	1.6	898	854	0.87	R77 R37	4P	73
	1.7	859	817	0.91	RF77 R37	4P	Y9
	1.8	803	764	0.97			
	1.9	776	738	1.00			
	2.1	683	650	1.14			
	2.4	600	571	1.30			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.18	2.5.	595	556	1.31	R 77 R37 RF77 R37	4P 4P	73 79
	2.5	591	562	1.32			
	2.8	517	492	1.51			
	3.2	454	432	1.72			
	3.7	397	378	1.96			
	4.3	341	325	2.3			
	4.7	308	293	2.5			
	2.4	597	568	0.95	R 67 R37 RF67 R37	4P 4P	63 66
	2.5	594	565	0.96			
	2.8	517	492	1.10			
	2.9	510	485	1.12			
	3.2	464	441	1.23			
	3.6	406	386	1.40			
	4.0	365	347	1.56			
	4.7	310	295	1.84			
	5.4	271	258	2.1			
	2.9	500	475	0.86	R 57 R37 RF57 R37	4P 4P	51 55
	3.1	468	446	0.91			
	3.4	431	410	0.99			
	3.8	380	361	1.13			
	3.9	375	356	1.14			
	4.3	343	326	1.25			
	4.4	330	314	1.29			
	4.8	304	289	1.41			
	5.2	282	269	1.51			
	5.3	278	264	1.54			
	5.7	258	246	1.66			
	6.4	229	218	1.87			
	6.5	226	215	1.89			
	7.5	195	185	2.2			
	8.9	164	156	2.6			
	4.6	319	304	0.89	R 47 R37 RF47 R37	4P 4P	43 43
	5.6	263	250	1.09			
	6.1	240	228	1.19			
	7.2	204	194	1.40			
	4.4	389	192.55	2.0	R 77 RF77	4P 4P	60 66
	4.9	350	173.08	2.4			
	5.8	298	147.12	2.7			
	6.2	276	136.43	2.9			
	7.2	239	118.42	3.2			
	7.2	238	192.55	3.0	R 77 RF77	4P 4P	56 62
	8.0	214	173.08	3.6			
	8.7	197	159.23	3.8			
	9.4	182	147.12	4.1			
	10	169	136.43	4.4			
	4.1	415	205.30	1.43	R 67 RF67	4P 4P	50 53
	4.5	382	189.09	1.57			
	5.2	328	162.40	1.81			
	6.0	286	141.32	2.1	R 67 RF67	6P 6P	50 50
	6.4	268	132.36	2.2			
	7.3	236	116.89	2.6			
	8.2	210	104.00	2.8			
	8.6	199	98.33	3.0			
	10	178	88.24	3.3			
	11	150	74.18	3.9			
	12	141	69.48	4.1			
	6.8	254	205.30	2.2			
	7.4	234	189.09	2.4	R 67 RF67	4P 4P	46 49
	8.6	201	162.40	2.8			
	9.2	187	151.27	2.9			
	10	175	141.32	3.1			
	11	164	132.36	3.4			
	11	154	124.26	3.6			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N・m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.18	12	145	116.89	3.8	R 67	4P	46
	13	136	110.17	3.9	RF67	4P	49
	13	129	104.00	4.1			
	4.6	378	186.05	1.14	R 57	6P	38
	5.0	347	171.36	1.24	RF57	6P	42
	5.8	298	147.17	1.47			
	6.6	259	128.07	1.66			
	7.1	243	119.95	1.81			
	7.5	230	186.05	1.76	R 57	4P	34
	8.1	212	171.36	1.90	RF57	4P	38
	9.4	182	147.17	2.2			
	10	170	137.09	2.4			
	11	158	128.07	2.6			
	12	148	119.95	2.8			
	12	139	112.61	2.9			
	13	131	105.93	3.0			
	14	123	99.84	3.3			
	15	117	94.25	3.4			
	16	110	89.11	3.6			
	8.0	214	173.10	1.24	R 47	4P	26
	8.7	197	159.43	1.33	RF47	4P	26
	10	169	136.92	1.57			
	11	158	127.55	1.66			
	12	147	119.15	1.81			
	12	138	111.60	1.90			
	13	130	104.77	2.0			
	14	122	98.56	2.2			
	15	115	92.89	2.4			
	16	108	87.69	2.5			
	17	103	83.34	2.6			
	18	96	77.64	2.9			
	19	90	72.53	3.1			
	20	84	67.93	3.6			
	22	79	63.77	3.9			
	23	74	59.99	4.1			
	25	70	56.54	4.5			
	26	66	53.38	4.8			
	6.7	255	126.09	0.80	R 37	6P	25
	7.9	217	107.35	0.90	RF37	6P	27
	9.2	187	92.56	1.05			
	10	174	86.27	1.14			
	10	170	137.47	1.09	R 37	4P	21
	11	156	126.09	1.19	RF37	4P	23
	12	144	116.14	1.28			
	13	133	107.35	1.38			
	14	123	99.55	1.52			
	15	114	92.56	1.62			
	16	107	86.27	1.71			
	19	90	73.00	2.0			
	21	82	66.36	2.1			
	23	75	60.51	2.4			
	25	68	55.30	2.7			
	27	63	50.65	2.9			
	30	57	46.45	3.0			
	33	53	42.66	3.4			
	37	47	37.96	3.9			
	40	43	34.51	4.3			
	44	39	31.46	4.8			
	48	36	28.76	5.1			
	53	33	26.34	5.4			
	58	30	24.16	5.9			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N・m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.18	137	13	6.2	2.3	RX 67	6P	23
	148	12	5.75	3.2	RXF67	6P	24
	159	11	5.35	4.4			
	182	9.5	4.68	5.5			
	193	8.9	4.4	5.9			
	205	8.4	4.14	6.8			
	217	7.9	3.91	7.2			
	230	7.5	3.7	7.6			
	243	7.1	3.5	8.1			
	266	6.5	3.2	8.8			
	327	5.3	2.6	11			
	374	4.6	2.27	12			
	224	7.7	6.2	3.7	RX 67	4P	19
	242	7.1	5.75	5.2	RXF67	4P	20
	260	6.6	5.35	7.2			
	297	5.8	4.68	9.0			
	316	5.4	4.4	9.6			
	336	5.1	4.14	11			
	355	4.8	3.91	12			
	376	4.6	3.7	12			
	397	4.3	3.5	13			
	434	4.0	3.2	14			
	535	3.2	2.6	18			
	612	2.8	2.27	20			
	257	6.7	5.4	5.5	RX 47	4P	15
	299	5.8	4.65	7.4	RXF47	4P	16
	321	5.4	4.33	12			
	343	5.0	4.05	13			
	366	4.7	3.8	14			
	389	4.4	3.57	15			
	414	4.2	3.36	15			
	438	3.9	3.17	16			
	489	3.5	2.84	18			
	517	3.3	2.69	20			
	543	3.2	2.56	21			
	632	2.7	2.2	24			
	728	2.4	1.91	28			
	832	2.1	1.67	32			
0.25	0.14	14145	9689	0.87	R 147 R77	4P	536
	0.16	12496	8559	0.99	RF147 R77	4P	546
	0.18	10996	7532	1.12			
	0.22	9340	6397	1.32			
	0.25	8038	5505	1.54			
	0.28	7158	4903	1.73			
	0.32	6320	4329	1.95			
	0.37	5493	3763	2.2			
	0.42	4874	3339	2.5			
	0.47	4303	2947	2.9			
	0.23	8688	5951	0.87	R 137 R77	4P	366
	0.27	7553	5173	1.01	RF137 R77	4P	386
	0.30	6870	4706	1.11			
	0.31	6547	4484	1.16			
	0.35	5842	4002	1.30			
	0.35	5753	3941	1.32			
	0.40	5123	3509	1.48			
	0.42	4830	3308	1.57			
	0.46	4369	2993	1.74			
	0.51	3948	2704	1.92			
	0.58	3528	2417	2.2			
	0.67	3030	2075	2.5			
	0.76	2688	1841	2.8			
	0.97	2085	1428	3.6			
	1.1	1774	1215	4.3			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.25	0.45	4514	3092	0.90	R 107 R77 RF107 R77	4P 4P	266 271
	0.46	4398	3013	0.93			
	0.68	2968	2033	1.38			
	0.77	2630	1802	1.55			
	0.87	2325	1592	1.76			
	0.99	2053	1406	1.99			
	1.2	1755	1202	2.3			
	1.5	1367	937	3.0			
	1.6	1236	846	3.3			
	0.68	2964	2030	0.96	R 97 R57 RF97 R57	4P 4P	172 177
	0.76	2667	1827	1.07			
	0.81	2515	1723	1.13			
	0.85	2395	1641	1.19			
	0.88	2307	1580	1.24			
	1.0	2003	1372	1.42			
	1.1	1796	1230	1.59			
	1.3	1547	1059	1.84			
	1.5	1364	934	2.1			
	1.7	1204	824	2.4			
	1.9	1076	737	2.6			
	2.2	924	633	3.1			
	1.2	1718	1176	0.86	R 87 R57 RF87 R57	4P 4P	122 129
	1.4	1501	1028	0.98			
	1.5	1361	932	1.08			
	1.6	1292	885	1.14			
	1.7	1174	804	1.25			
	1.8	1148	786	1.28			
	2.0	1008	690	1.46			
	2.3	865	593	1.70			
	2.7	762	522	1.93			
	3.1	662	453	2.2			
	5.1	399	273	3.7			
	2.5	826	566	0.94	R 77 R37 RF77 R37	4P 4P	77 83
	2.5	820	562	0.95			
	2.8	718	492	1.08			
	3.2	631	432	1.24			
	3.7	551	378	1.41			
	4.3	474	325	1.64			
	4.7	428	293	1.82			
	5.3	379	260	2.1			
	6.2	326	224	2.4			
	3.6	564	386	1.01	R 67 R37 RF67 R37	4P 4P	67 70
	3.6	561	384	1.02			
	3.9	522	358	1.09			
	4.0	506	347	1.13			
	4.5	453	311	1.26			
	4.7	431	295	1.32			
	5.4	377	258	1.51			
	6.0	340	233	1.67			
	7.0	291	200	1.96			
	7.6	266	182	2.1			
	8.0	254	174	2.2			
	8.9	229	157	2.5			
	4.3	476	326	0.90	R 57 R37 RF57 R37	4P 4P	55 59
	4.4	459	314	0.93			
	4.8	422	289	1.01			
	5.2	392	269	1.09			
	5.3	386	264	1.11			
	5.7	358	246	1.19			
	6.4	318	218	1.34			
	6.5	314	215	1.36			
	7.5	270	185	1.58			
	8.4	241	165	1.77			
	9.8	207	142	2.1			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.25	6.1	333	228	0.86	R 47SR37 RF47SR37	4P 4P	47 47
	7.2	283	194	1.01			
	7.6	266	182	1.07			
	9.0	226	155	1.26			
	2.3	1059	286.06	2.7	R97 RF97	8P 8P	148 163
	2.5	940	254.02	3.0			
	2.7	889	240.29	3.2			
	2.9	822	221.98	3.5			
	2.6	909	245.54	1.62	R 87 RF87	8P 8P	98 105
	3.1	781	211.01	1.89			
	3.3	728	196.79	2.0			
	3.5	682	184.15	2.2			
	3.7	641	173.08	1.22	R77 RF77	8P 8P	68 74
	4.4	545	147.12	1.43			
	4.7	505	136.43	1.54			
	5.4	438	118.42	1.78			
	4.4	541	192.55	1.44	R 77 RF77	6P 6P	62 68
	4.9	486	173.08	1.60			
	5.8	413	147.12	1.89			
	7.2	331	192.55	2.4	R77 RF77	4P 4P	60 66
	8.0	297	173.08	2.6			
	8.7	273	159.23	2.8			
	9.4	253	147.12	3.1			
	10	234	136.43	3.3			
	12	203	118.42	3.8			
	4.0	601	162.40	0.95	R67 RF67	8P 8P	58 61
	4.6	523	141.32	1.09			
	4.9	490	132.36	1.16			
	5.5	433	116.89	1.32			
	4.1	577	205.30	0.99	R 67 RF67	6P 6P	52 55
	4.5	531	189.09	1.07			
	5.2	456	162.40	1.25			
	6.0	397	141.32	1.44			
	6.4	372	132.36	1.53			
	7.3	328	116.89	1.74			
	8.2	292	104.00	1.95			
	6.8	353	205.30	1.62	R67 RF67	4P 4P	50 53
	7.4	325	189.09	1.75			
	8.6	279	162.40	2.0			
	9.2	260	151.27	2.2			
	10	243	141.32	2.3			
	11	227	132.36	2.5			
	11	213	124.26	2.7			
	12	201	116.89	2.8			
	13	189	110.17	3.0			
	13	179	104.00	3.2			
	14	169	98.33	3.4			
	16	152	88.24	3.8			
	19	127	74.18	4.5			
	20	119	69.48	4.8			
	21	T12	65.22	5.1			
	23	105	61.36	5.4			
	24	99	57.82	5.7			
	25	94	54.59	6.1			
	27	89	51.61	6.4			
	4.6	523	186.05	0.82	R 57 RF57	6P 6P	40 44
	5.0	481	171.36	0.89			
	5.8	413	147.17	1.03			
	6.6	360	128.07	1.19			
	7.1	337	119.95	1.27			
	8.0	298	105.93	1.44			
	8.5	280	99.84	1.52			
	7.5	320	186.05	1.34	R57 RF57	4P 4P	38 42
	8.1	294	171.36	1.45			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.25	9.4	253	147.17	1.69	R 57	4P	38
	10	235	137.09	1.82	RF57	4P	42
	11	220	128.07	1.94			
	12	206	119.95	2.1			
	12	193	112.61	2.2			
	13	182	105.93	2.3			
	14	171	99.84	2.5			
	15	162	94.25	2.6			
	16	153	89.11	2.8			
	17	137	79.97	3.1			
	20	117	68.05	3.7			
	22	110	63.88	3.9			
	23	103	60.10	4.1			
	25	97	56.64	4.4			
	26	92	53.47	4.7			
	27	87	50.55	4.9			
	8.0	297	173.10	0.96	R 47	4P	30
	8.7	274	159.43	1.04	RF47	4P	30
	10	235	136.92	1.21			
	11	219	127.55	1.30			
	12	205	119.15	1.39			
	12	192	111.60	1.49			
	13	180	104.77	1.58			
	14	169	98.56	1.68			
	15	160	92.89	1.79			
	16	151	87.69	1.89			
	17	143	83.34	1.99			
	18	133	77.64	2.1			
	19	125	72.53	2.3			
	20	117	67.93	2.4			
	22	110	63.77	2.(3			
	23	103	59.99	2.8			
	25	97	56.54	2.9			
	26	92	53.38	3.1			
	10	236	137.47	0.80	R 37	4P	25
	11	217	126.09	0.88	RF37	4P	27
	12	199	116.14	0.95			
	13	184	107.35	1.03			
	14	171	99.55	1.11			
	15	159	92.56	1.20			
	16	148	86.27	1.28			
	19	125	73.00	1.52			
	21	114	66.36	1.67			
	23	104	60.51	1.83			
	25	95	55.30	2.0			
	27	87	50.65	2.2			
	30	80	46.45	2.4			
	33	73	42.66	2.6			
	37	65	37.96	2.9			
	40	59	34.51	3.2			
	44	54	31.46	3.5			
	48	49	28.76	3.8			
	53	45	26.34	4.2			
	58	41	24.16	4.6			
	137	17	6.20	2.3	RX 67	6P	25
	148	16	5.75	4.1	RXF67	6P	26
	159	15	5.35	4.7			
	182	13	4.68	5.9			
	193	12	4.40	6.1			
	205	12	4.14	6.9			
	217	11	3.91	7.5			
	230	10	3.70	8.0			
	243	9.8	3.50	8.7			
	266	9.0	3.20	11			
	327	7.3	2.60	15			
	374	6.4	2.27	19			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.25	224	11	6.20	3.8	RX 67 RXF67	4P 4P	23 24
	242	9.9	5.75	6.7			
	260	9.2	5.35	7.8			
	297	8.0	4.68	9.7			
	316	7.6	4.40	10			
	336	7.1	4.14	11			
	355	6.7	3.91	12			
	376	6.4	3.70	13			
	397	6.0	3.50	14			
	434	5.5	3.20	17			
	535	4.5	2.60	25			
	612	3.9	2.27	32			
	257	9.3	5.40	4.0	RX 47 RXF47	4P 4P	19 20
	299	8.0	4.65	5.4			
	321	7.4	4.33	8.7			
	343	7.0	4.05	9.3			
	366	6.5	3.80	10			
	389	6.1	3.57	11			
	414	5.8	3.36	11			
	438	5.4	3.17	11			
	489	4.9	2.84	13			
	517	4.6	2.69	14			
	543	4.4	2.56	15			
	632	3.8	2.20	17			
	728	3.3	1.91	20			
	832	2.9	1.67	23			
0.37	0.18	16275	7532	0.80	R 147 R77 RF147 R77	4P 4P	547 557
	0.22	13823	6397	0.89			
	0.25	11896	5505	1.04			
	0.28	10594	4903	1.17			
	0.32	9353	4329	1.32			
	0.37	8130	3763	1.52			
	0.42	7214	3339	1.71			
	0.47	6368	2947	1.94			
	0.31	9689	4484	0.80	R137 R77 RF137 R77	4P 4P	367 387
	0.35	8647	4002	0.88			
	0.35	8515	3941	0.89			
	0.40	7583	3509	1.00			
	0.42	7149	3308	1.06			
	0.46	6466	2993	1.18			
	0.51	5844	2704	1.30			
	0.58	5222	2417	1.46			
	0.62	4864	2251	1.56			
	0.67	4484	2075	1.69			
	0.76	3978	1841	1.91			
	0.97	3085	1428	2.5			
	1.1	2626	1215	2.9			
	1.3	2307	1068	3.3			
	1.4	2087	966	3.6			
	0.68	4405	2038	0.93	R107SR77 RF107SR77	4P 4P	267 272
	0.68	4393	2033	0.93			
	0.77	3893	1802	1.05			
	0.83	3630	1680	1.13			
	0.87	3441	1592	1.19			
	0.90	3354	1552	1.22			
	1.0	3038	1406	1.34			
	1.1	2633	1218	1.55			
	1.2	2597	1202	1.57			
	1.3	2326	1076	1.76			
	1.5	2024	937	2.0			
	1.6	1829	846	2.2			
	1.0	3073	1422	0.93	R 97SR57 RF97SR57	4P 4P	173 178
	1.0	2965	1372	0.96			
	1.1	2658	1230	1.07			
	1.2	2591	1199	1.10			
	1.3	2364	1094	1.21			
	1.3	2289	1059	1.25			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.37	1.3	2289	1059	1.25	R97 R57 RF97 R57	4P 4P	173 178
	1.5	2019	934	1.41			
	1.7	1781	824	1.60			
	1.9	1593	737	1.79			
	2.2	1368	633	2.1			
	3.3	922	427	3.1			
	3.7	813	376	3.5			
	4.1	728	337	3.9			
	1.7	1738	804	0.85	R 87 R57 RF87 R57	4P 4P	123 130
	1.8	1698	786	0.87			
	1.8	1631	755	0.90			
	2.0	1491	690	0.99			
	2.1	1410	652	1.04			
	2.3	1281	593	1.15			
	2.6	1149	532	1.28			
	2.7	1128	522	1.31			
	2.9	1019	472	1.44			
	3.1	980	453	1.50			
	3.5	866	401	1.70			
	3.8	781	361	1.89			
	5.1	591	273	2.5			
	5.9	506	234	2.9			
	3.2	933	432	0.83	R 77 R37 RF77 R37	4P 4P	78 84
	3.7	816	378	0.95			
	4.3	702	325	1.11			
	4.7	633	293	1.23			
	5.3	562	260	1.39			
	6.2	483	224	1.61			
	7.0	426	197	1.83			
	8.2	366	170	2.1			
	9.4	321	148	2.4			
	4.7	637	295	0.89	R 67 R37 RF67 R37	4P 4P	68 71
	5.4	558	258	1.02			
	6.0	504	233	1.13			
	7.0	431	200	1.32			
	2.6	1340	254.02	2.1	R 97 RF97	8P 8P	151 166
	2.8	1267	240.29	2.2			
	3.0	1171	221.98	2.4			
	3.5	1012	191.83	2.8			
	3.1	1142	286.06	2.5	R 97 RF97	6P 6P	145 160
	3.5	1014	254.02	2.8			
	3.7	959	240.29	3.0			
	4.0	886	221.98	3.2			
	3.2	1113	211.01	1.32	R 87 RF87	8P 8P	101 108
	3.4	1038	196.79	1.42			
	3.6	971	184.15	1.52			
	3.6	980	245.54	1.50			
	4.2	842	211.01	1.75	R 87 RF87	6P 6P	95 102
	4.5	786	196.79	1.87			
	4.8	735	184.15	2.0			
	5.8	613	153.46	2.4			
	6.1	579	145.09	2.5			
	4.6	776	147.12	1.00	R 77 RF77	8P 8P	71 77
	4.9	719	136.43	1.08			
	5.7	625	118.42	1.25			
	5.1	691	173.08	1.13	R 77 RF77	6P 6P	65 77
	6.0	587	147.12	1.33			
	6.5	545	136.43	1.43			
	7.2	489	192.55	4.59	R 77 RF77	4P 4P	61 67
	8.0	440	173.08	1.77			
	8.7	405	159.23	1.92			
	9.4	374	147.12	2.1			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.37	10	347	136.43	2.2	R 77	4P	61
	12	301	118.42	2.6	RF77	4P	67
	13	282	110.77	2.8			
	13	264	103.85	3.0			
	15	236	92.91	3.3			
	16	220	86.54	3.5			
	17	205	80.77	3.8			
	5.4	648	162.40	0.88	R 67	6P	55
	6.3	564	141.32	1.01	RF67	6P	58
	6.7	528	132.36	1.08			
	7.6	467	116.89	1.22			
	6.8	522	205.30	1.09	R 67	4P	51
	7.4	481	189.09	1.19	RF67	4P	54
	8.6	413	162.40	1.38			
	9.2	385	151.27	1.48			
	10	359	141.32	1.59			
	11	336	132.36	1.69			
	11	316	124.26	1.80			
	12	297	116.89	1.92			
	13	280	110.17	2.0			
	13	264	104.00	2.2			
	14	250	98.33	2.3			
	16	224	88.24	2.5			
	19	189	74.18	3.0			
	20	177	69.48	3.2			
	21	166	65.22	3.4			
	23	156	61.36	3.7			
	24	147	57.82	3.9			
	25	139	54.59	4.1			
	27	131	51.61	4.3			
	6.9	511	128.07	0.84	R 57	6P	43
	7.4	479	119.95	0.89	RF57	6P	47
	8.4	423	105.93	1.01			
	8.9	399	99.84	1.07			
	7.5	473	186.05	0.90	R 57	4P	39
	8.1	436	171.36	0.98	RF57	4P	43
	9.4	374	147.17	1.14			
	10	348	137.09	1.23			
	11	326	128.07	1.31			
	12	305	119.95	1.40			
	12	286	112.61	1.49			
	13	269	'105.93	1.59			
	14	254	99.84	1.68			
	15	240	94.25	1.78			
	16	227	89.11	1.89			
	17	203	79.97	2.1			
	20	173	68.05	2.5			
	22	162	63.88	2.6			
	23	153	60.10	2.8			
	25	144	56.64	3.0			
	26	136	53.47	3.1			
	27	129	50.55	3.3			
	28	125	49.18	3.4			
	31	115	45.37	3.7			
	10	348	136.92	0.82	R47	4P	31
	11	324	127.55	0.88	RF47	4P	31
	12	303	119.15	0.94			
	12	284	111.60	1.00			
	13	266	104.77	1.07			
	14	251	98.56	1.14			
	15	236	92.89	1.21			
	16	223	87.69	1.28			
	17	212	83.34	1.35			
	18	197	77.64	1.44			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.37	19	184	72.53	1.55	R 47	4P	31
	20	173	67.93	1.65	RF47	4P	31
	22	162	63.77	1.76			
	23	153	59.99	1.87			
	25	144	56.54	1.98			
	26	136	53.38	2.1			
	28	125	49.09	2.3			
	31	115	45.29	2.5			
	33	106	41.88	2.7			
	38	99	38.82	2.9			
	39	92	36.05	3.1			
	41	85	33.52	3.3			
	46	77	30.10	2.7	R 47	4P	31
	50	70	27.73	4.0	RF47	4P	31
	58	61	23.81	4.7			
	63	56	22.18	5.1			
	67	53	20.72	5.3			
	72	49	19.41	5.6			
	76	46	18.22	5.9			
	81	44	17.14	6.1			
	86	41	16.15	6.4			
	15	235	92.56	0.81	R37	4P	26
	16	219	86.27	0.87	RF37	4P	28
	19	186	73.00	1.02			
	21	169	66.36	1.13			
	23	154	60.51	1.24			
	25	141	55.30	1.35			
	27	129	50.65	1.48			
	30	118	46.45	1.61			
	33	108	42.66	1.75			
	37	96	37.96	1.97			
	40	88	34.51	2.2			
	44	80	31.46	2.4			
	48	73	28.76	2.6			
	53	67	26.34	2.8			
	58	61	24.16	3.1			
	48	74	29.20	2.6	R 37	4P	26
	52	69	26.96	2.6	RF37	4P	28
	56	64	24.98	3.0			
	64	55	21.66	3.5			
	69	51	20.24	3.7			
	73	48	18.96	3.9			
	78	45	17.80	4.2			
	88	40	15.76	4.7			
	96	37	14.44	4.9			
	105	34	13.27	5.3			
	114	31	12.22	5.6			
	133	27	10.43	6.1			
	144	25	9.65	6.5			
	174	20	8.00	7.3			
	204	17	6.80	7.9			
	239	15	5.82	9.1			
	278	13	5.00	10			
	327	11	4.25	11			
	165	21	5.35	3.3	RX67	6P	28
	189	19	4.68	4.2	RXF67	6P	29
	201	18	4.40	4.3			
	214	17	4.14	4.9			
	226	16	3.91	5.3			
	239	15	3.70	5.6			
	253	14	3.50	6.1			
	277	13	3.20	7.4			
	340	10	2.60	11			
	390	9.1	2.27	14			
	224	16	6.20	2.6	RX 67	4P	24
	242	15	5.75	4.5	RXF67	4P	25
	260	14	5.35	5.2			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.37	297	12	4.68	6.5	RX 67 RXF67	4P 4P	24 25
	316	11	4.40	6.8			
	336	11	4.14	7.7			
	355	9.9	3.91	8.3			
	376	9.4	3.70	8.8			
	397	8.9	3.50	9.6			
	434	8.1	3.20	12			
	535	6.6	2.60	17			
	612	5.8	2.27	21			
	257	14	5.40	2.7	RX 47 RXF47	4P 4P	20 21
	299	12	4.65	3.6			
	321	11	4.33	5.9			
	343	10	4.05	6.3			
	366	9.7	3.80	6.8			
	389	9.1	3.57	7.2			
	414	8.5	3.36	7.2			
	438	8.1	3.17	7.7			
	489	7.2	2.84	8.8			
	517	6.8	2.69	9.6			
	543	6.5	2.56	10			
	632	5.6	2.20	12			
	728	4.9	1.91	14			
	832	4.2	1.67	15			
0.55	0.23	19684	6128	0.87	R 167 R97 RF167 R97	4P 4P	970 980
	0.26	17313	5390	0.99			
	0.30	14812	4611	1.15			
	0.34	13249	4125	1.29			
	0.28	15748	4903	0.80	R 147 R77 RF147 R77	4P 4P	551 561
	0.32	13904	4329	0.89			
	0.37	12085	3763	1.02			
	0.42	10723	3339	1.15			
	0.47	9466	2947	1.30			
	0.54	8251	2569	1.50			
	0.62	7257	2260	1.70			
	0.71	6250	1946	1.98			
	0.81	5491	1710	2.2			
	0.90	4975	1549	2.5			
	1.0	4350	1354	2.8			
	1.2	3828	1192	3.2			
	0.51	8687	2704	0.87	R 137 R77 RF137 R77	4P 4P	371 391
	0.58	7762	2417	0.98			
	0.67	6666	2075	1.14			
	0.76	5913	1841	1.29			
	0.86	5196	1618	1.46			
	0.97	4586	1428	1.66			
	1.1	3903	1215	1.95			
	1.3	3430	1068	2.2			
	1.4	3102	966	2.4			
	1.7	2629	819	2.9			
	1.0	4516	1406	0.90	R 107 R77 RF107 R77	4P 4P	271 276
	1.1	3914	1218	1.04			
	1.2	3860	1202	1.06			
	1.2	3627	1129	1.13			
	1.3	3458	1076	1.18			
	1.5	3008	937	1.36			
	1.5	2943	916	1.39			
	1.6	2719	846	1.50			
	1.7	2632	820	1.55			
	1.9	2319	722	1.76			
	2.2	2028	632	2.0			
	1.5	3001	934	0.95	R 97 R77 RF97 R77	4P 4P	177 182
	1.7	2648	824	1.08			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.55	2.2	2033	633	1.40	R 97 R77 RF97 R77	4P 4P	177 182
	2.5	1803	561	1.58			
	2.9	1558	485	1.83			
	3.3	1370	427	2.1			
	3.7	1209	376	2.4			
	4.1	1082	337	2.6			
	4.7	954	297	3.0			
	5.6	794	247	3.6			
	2.7	1677	522	0.88	R 87 R57 RF87 R57	4P 4P	127 134
	2.9	1515	472	0.97			
	3.1	1456	453	1.01			
	3.5	1287	401	1.14			
	3.5	1267	395	1.16			
	3.8	1161	361	1.27			
	4.0	1127	351	1.31			
	4.5	985	307	1.49			
	5.0	893	278	0.87	R77 R37 RF77 R37	4P 4P	82 88
	5.8	766	238	1.02			
	6.3	709	221	1.10			
	7.4	606	189	1.29			
	2.6	1991	254.02	1.43	R 97 RF97	8P 8P	151 166
	2.8	1884	240.29	1.51			
	3.0	1740	221.98	1.64			
	3.1	1698	286.06	1.68	R 97 RF97	6P 6P	147 162
	3.5	1508	254.02	1.89			
	3.7	1426	240.29	2.0			
	4.0	1317	221.98	2.2			
	4.9	1081	286.06	2.6	R97 RF97	4P 4P	145 160
	5.5	960	254.02	3.0			
	5.8	908	240.29	3.1			
	6.3	839	221.98	3.4			
	6.7	778	205.96	3.7			
	7.2	725	191.83	3.9			
	7.8	677	179.26	4.2			
	8.3	635	168.02	4.5			
	9.3	562	148.75	5.1			
	3.6	1457	245.54	1.01	R 87 RF87	6P 6P	97 104
	4.2	1252	211.01	1.18			
	4.5	1168	196.79	1.26			
	4.8	1093	184.15	1.35			
	5.8	911	153.46	1.62			
	5.7	928	245.54	1.59	R 87 RF87	6P 6P	95 102
	6.6	797	211.01	1.85			
	7.1	744	196.79	1.98			
	7.5	696	184.15	2.1			
	9.1	580	153.46	2.5			
	10	548	145.09	2.7			
	11	457	120.96	3.2			
	12	425	112.54	3.5			
	13	397	105.00	3.7			
	8.0	654	173.08	1.19	R 77 F77	4P 4P	65 71
	8.7	602	159.23	1.29			
	9.4	556	147.12	1.40			
	10	516	136.43	1.51			
	12	447	118.42	1.74			
	13	419	110.77	1.86			
	13	392	103.85	1.99			
	15	351	92.91	2.2			
	16	327	86.54	2.4			
	17	305	80.77	2.6			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N・m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.55	18	285	75.52	2.7	R 77	4P	65
	20	267	70.74	2.9	RF77	4P	71
	21	251	66.35	3.1			
	8.6	614	162.40	0.93	R67	4P	55
	9.2	572	151.27	1.00	RF67	4P	58
	10	534	141.32	1.07			
	11	500	132.36	1.14			
	11	470	124.26	1.21			
	12	442	116.89	1.29			
	13	416	110.17	1.37			
	13	393	104.00	1.45			
	14	372	98.33	1.53			
	16	333	88.24	1.71			
	19	280	74.18	2.0			
	20	263	69.46	2.2			
	21	246	65.22	2.3			
	23	232	61.36	2.5			
	24	219	57.82	2.6			
	25	206	54.59	2.8			
	27	195	51.61	2.9			
	12	453	119.95	0.94	R57	4P	43
	12	426	112.61	1.00	RF57	4P	47
	13	400	105.93	1.07			
	14	377	99.84	1.13			
	15	356	94.25	1.20			
	16	337	89.11	1.27			
	17	302	79.97	1.41			
	20	257	68.05	1.66			
	22	241	63.88	1.77			
	23	227	60.10	1.88			
	25	214	56.64	2.0			
	26	202	53.47	2.1			
	27	191	50.55	2.2			
	28	186	49.18	2.3			
	31	171	45.37	2.5			
	33	159	41.96	2.7			
	36	147	38.89	2.9			
	38	136	36.11	3.1			
	41	127	33.58	3.4			
	44	118	31.28	3.6			
	48	110	29.16	3.9			
	51	103	27.22	4.2			
	53	100	26.36	4.3	R57	4P	43
	57	92	24.25	4.7	RF57	4P	47
	62	85	22.41	5.0			
	67	79	20.78	5.4			
	77	68	18.04	6.3			
	82	64	16.87	6.7			
	88	60	15.82	7.0			
	91	58	15.23	7.2			
	98	53	14.15	7.6			
	105	50	13.18	8.0			
	113	46	12.30	8.4			
	121	43	11.50	8.9			
	129	41	10.77	9.1			
	138	38	10.11	9.6			
	146	36	9.49	9.8			
	15	351	92.89	0.81	R47	4P	35
	16	331	87.69	0.86	RF47	4P	35
	17	315	83.34	0.90			
	18	293	77.64	0.97			
	19	274	72.53	1.04			
	20	257	67~93	1.11			
	22	241	63.77	1.18			
	23	227	59.99	1.26			
	25	214	56.54	1.33			
	26	202	53.38	1.41			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.55	28	186	49.09	1.54	R 47	4P	35
	31	171	45.29	1.67	RF47	4P	35
	33	158	41.88	1.80			
	36	147	38.82	1.94			
	39	136	36.05	2.1			
	41	127	33.52	2.2			
	45	118	31.22	2.4			
	48	110	29.11	2.6			
	51	103	27.17	2.8			
	61	86	22.75	3.3			
	50	105	27.73	2.7	R47	4P	35
	58	90	23.81	3.2	RF47	4P	35
	63	84	22.18	3.4			
	67	78	20.72	3.6			
	72	73	19.41	3.8			
	76	69	18.22	4.0			
	81	65	17.14	4.1			
	86	61	16.15	4.3			
	99	53	14.03	4.7			
	107	49	12.94	4.9			
	116	45	11.97	5.1			
	135	39	10.30	5.6			
	145	36	9.58	5.9	R47	4P	35
	156	34	8.92	6.2	RF47	4P	35
	179	29	7.76	5.3			
	184	29	7.55	5.4			
	199	26	7.00	5.7			
	214	25	6.50	6.1			
	230	23	6.05	6.5			
	247	21	5.63	6.9			
	284	19	4.90	7.7			
	23	229	60.51	0.83	R37	4P	30
	25	209	55.30	0.91	RF37	4P	32
	27	191	50.65	0.99			
	30	176	46.45	1.08			
	33	161	42.66	1.18			
	37	143	37.96	1.32			
	40	130	34.51	1.46			
	44	119	31.46	1.60			
	48	109	28.76	1.75			
	53	100	26.34	1.91			
	58	91	24.16	2.1			
	48	110	29.20	1.72	R37	4P	30
	52	102	26.96	1.73	RF37	4P	32
	56	94	24.98	2.0			
	64	82	21.66	2.3			
	69	76	20.24	2.5			
	73	72	18.96	2.7			
	78	67	17.80	2.8			
	88	60	15.76	3.2			
	96	55	14.44	3.3			
	105	50	13.27	3.6			
	114	46	12.22	3.8			
	133	39	10.43	4.1			
	144	36	9.65	4.3			
	174	30	8.00	4.9			
	204	26	6.80	5.3			
	239	22	5.82	6.1			
	278	19	5.00	6.8			
	327	16	4.25	7.5			
	354	15	3.93	7.8			
	413	13	3.37	8.4			
	165	32	5.35	2.2	RX67	6P	30
	189	28	4.68	2.8	RXF67	6P	31
	201	26	4.40	2.9			
	214	25	4.14	3.3			
	226	23	3.91	3.6			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N・m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.55	239	22	3.70	3.8	RX 67 RXF67	6P 6P	30 31
	253	21	3.50	4.1			
	277	19	3.20	5.0			
	340	15	2.60	7.3			
	390	13	2.27	9.2			
	260	20	5.35	3.5	RX 67 RXF67	4P 4P	28 29
	297	18	4.68	4.4			
	316	17	4.40	4.6			
	336	16	4.14	5.2			
	355	15	3.91	5.6			
	376	14	3.70	5.9			
	397	13	3.50	6.5			
	434	12	3.20	7.9			
	535	9.8	2.60	11			
	612	8.6	2.27	14			
	321	16	4.33	3.9	RX 47 RXF47	4P 4P	24 25
	343	15	4.05	4.2			
	366	14	3.80	4.6			
	389	13	3.57	4.9			
	414	13	3.36	4.9			
	438	12	3.17	5.2			
	489	11	2.84	5.9			
	517	10	2.69	6.4			
	543	9.7	2.56	6.8			
	632	8.3	2.20	7.9			
	728	7.2	1.91	9.1			
	832	6.3	1.67	10			
0.75	0.30	20198	4611	0.85	R167 R97 RF167 R97	4P 4P	971 981
	0.34	18067	4125	0.95			
	0.52	11714	2674	1.46			
	0.59	10233	2336	1.67			
	0.67	9138	2086	1.87			
	0.95	6411	1464	2.7			
	0.42	14623	3339	0.84	R 147 R77 RF147 R77	4P 4P	552 562
	0.47	12909	2947	0.96			
	0.54	11251	2569	1.10			
	0.62	9897	2260	1.25			
	0.71	8522	1946	1.45			
	0.81	7488	1710	1.65			
	0.90	6784	1549	1.82			
	1.0	5932	1354	2.1			
	1.2	5220	1192	2.4			
	0.67	9090	2075	0.84	R 137 R77 RF137 R77	4P 4P	372 392
	0.74	8172	1866	0.93			
	0.76	8063	1841	0.94			
	0.86	7086	1618	1.07			
	0.89	6872	1569	1.11			
	0.97	6254	1428	1.22			
	1.0	6020	1374	1.26			
	1.1	5522	1261	1.38			
	1.1	5323	1215	1.43			
	1.3	4677	1068	1.63			
	1.4	4230	966	1.80			
	1.7	3585	819	2.1			
	1.9	3261	745	2.3			
	1.2	4946	1129	0.83	R 107 R77 RF107 R77	4P 4P	272 277
	1.3	4715	1076	0.87			
	1.5	4102	937	1.00			
	1.5	4013	916	1.02			
	1.6	3707	846	1.10			
	1.7	3590	820	1.14			
	3.7	1636	374	2.5			
	4.3	1430	327	2.9			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.75	2.2	2772	633	1.03	R 97 R57 RF97 R57	4P 4P	178 183
	2.5	2458	561	1.16			
	2.9	2125	485	1.34			
	3.3	1868	427	1.53			
	3.7	1648	376	1.73			
	4.1	1476	337	1.93			
	4.7	1301	297	2.2			
	5.6	1083	247	2.6			
	3.5	1728	395	0.85	R 87 R57 RF87 R57	4P 4P	128 135
	3.8	1583	361	0.93			
	4.0	1537	351	0.96			
	4.5	1343	307	1.10			
	4.7	1298	296	1.13			
	5.1	1197	273	1.23			
	5.4	1126	257	1.31			
	5.9	1026	234	1.44			
	2.7	2628	249.55	1.55	R 107 RF107	8P 8P	231 236
	2.9	2453	232.91	1.67			
	3.3	2158	204.89	1.89			
	4.1	1747	221.98	1.63	R 97 RF97	6P 6P	151 166
	4.7	1510	191.83	1.89			
	5.4	1322	168.02	2.2			
	4.9	1474	286.06	1.93	R 97 RF97	4P 4P	146 161
	5.5	1309	254.02	2.2			
	5.8	1238	240.29	2.3			
	6.3	1144	221.98	2.5			
	6.7	1061	205.96	2.7			
	7.2	988	191.83	2.9			
	7.8	924	179.26	3.1			
	8.3	866	168.02	3.3			
	9.3	766	148.75	3.7			
	11	672	130.44	4.2			
	12	595	115.46	4.8			
	13	561	108.95	5.1			
	4.3	1661	211.01	0.89	R 87 RF87	6P 6P	101 108
	4.6	1549	196.79	0.95			
	4.9	1449	184.15	1.02			
	5.9	1208	153.46	1.22			
	6.3	1142	145.09	1.29			
	5.7	1265	245.54	1.16	R 87 RF87	4P 4P	96 103
	6.6	1087	211.01	1.35			
	7.1	1014	196.79	1.45			
	7.5	949	184.15	1.55			
	9.1	791	153.46	1.86			
	9.6	748	145.09	1.97			
	11	623	120.96	2.4			
	12	580	112.54	2.5			
	13	541	105.00	2.7			
	14	512	99.30	2.9			
	15	474	92.08	3.1			
	17	411	79.80	3.6			
	19	384	74.54	3.8			
	20	359	69.76	4.1			
	8.0	892	173.08	0.87	R 77 RF77	4P 4P	66 72
	8.7	820	159.23	0.95			
	9.4	758	147.12	1.03			
	10	703	136.43	1.11			
	12	610	118.42	1.28			
	13	571	110.77	1.36			
	13	535	103.85	1.46			
	15	479	92.91	1.63			
	16	446	86.54	1.75			
	17	416	80.77	1.87			
	18	389	75.52	2.0			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.75	20	364	70.74	2.1	R 77	4P	66
	21	342	66.35	2.3	RF77	4P	72
	22	321	62.31	2.4			
	24	302	58.58	2.6			
	27	268	51.92	2.9			
	30	239	46.42	3.3			
	32	223	43.24	3.5			
	34	208	40.35	3.7			
	37	194	37.73	4.0			
	39	182	35.34	4.3			
	42	171	33.15	4.6			
	45	160	31.13	4.9			
	47	151	29.27	5.2			
	54	134	25.94	5.5			
	11	682	132.36	0.84	R 67	4P	56
	11	640	124.26	0.89	RF67	4P	59
	12	602	116.89	0.95			
	13	568	110.17	1.00			
	13	536	104.00	1.06			
	14	507	98.33	1.12			
	16	455	88.24	1.25			
	19	382	74.18	1.49			
	20	358	69.48	1.59			
	21	336	65.22	1.70			
	23	316	61.36	1.80			
	24	298	57.82	1.91			
	25	281	54.59	2.0			
	27	266	51.61	2.1			
	30	239	46.32	2.4			
	32	221	42.83	2.5			
	35	205	39.70	2.7			
	38	190	36.86	2.9			
	41	177	34.29	3.0			
	44	165	31.93	3.1			
	47	153	29.78	3.2			
	13	546	105.93	0.80	R57	4P	44
	14	514	99.84	0.83	RF57	4P	48
	15	486	94.25	0.88			
	16	459	89.11	0.93			
	17	412	79.97	1.04			
	20	351	68.05	1.22			
	22	329	63.88	1.30			
	23	310	60.10	1.38			
	25	392	56.64	1.46			
	26	276	53.47	1.55			
	27	260	50.55	1.64			
	28	253	49.18	1.69			
	31	234	45.37	1.83			
	33	216	41.96	1.98			
	36	200	38.89	2.1			
	38	186	36.11	2.3			
	41	173	33.58	2.5			
	44	161	31.28	2.7			
	48	150	29.16	2.8			
	51	140	27.22	3.0			
	53	136	26.36	3.1	R 57	4P	44
	57	125	24.25	3.4	RF57	4P	48
	62	115	22.41	3.7			
	67	107	20.78	4.0			
	77	93	18.04	4.6			
	82	87	16.87	4.9			
	88	82	15.82	5.1			
	91	78	15.23	5.3			
	98	73	14.15	5.6			
	105	68	13.18	5.9			
	113	63	12.30	6.1			
	121	59	11.50	6.5			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.75	129	56	10.77	6.7	R 57 RF57	4P 4P	44 48
	138	52	10.11	7.0			
	146	49	9.49	7.2			
	156	46	8.92	7.7			
	20	350	67.93	0.81	R47 RF47	4P 4P	36 36
	22	329	63.77	0.87			
	23	309	59.99	0.92			
	25	291	56.54	0.98			
	26	275	53.38	1.04			
	28	253	49.09	1.13			
	31	233	45.29	1.22			
	33	216	41.88	1.32			
	36	200	38.82	1.42			
	39	186	36.05	1.53			
	41	173	33.52	1.65			
	45	161	31.22	1.77			
	48	150	29.11	1.90			
	51	140	27.17	2.0			
	61	117	22.75	2.4			
	50	143	27.73	1.99	R 47 RF47	4P 4P	36 36
	58	123	23.81	2.3			
	63	114	22.18	2.5			
	67	107	20.72	2.6			
	72	100	19.41	2.8			
	76	94	18.22	2.9			
	81	88	17.14	3.0			
	86	83	16.15	3.1			
	99	72	14.03	3.5			
	107	67	12.94	3.6			
	116	62	11.97	3.8			
	135	53	10.30	4.1			
	145	49	9.58	4.3			
	156	46	8.92	4.5			
	179	40	7.76	3.9			
	184	39	7.55	3.9			
	199	36	7.00	4.2	R 47 RF47	4P 4P	36 36
	214	33	6.50	4.5			
	230	31	6.05	4.8			
	247	29	5.63	5.1			
	284	25	4.90	5.6			
	30	239	46.45	0.80	R 37 RF37	4P 4P	31 33
	33	220	42.66	0.86			
	37	196	37.96	0.97			
	40	178	34.51	1.07			
	44	162	31.46	1.17			
	48	148	28.76	1.28			
	53	136	26.34	1.40			
	58	124	24.16	1.53			
	48	150	29.20	1.26	R37 RF37	4P 4P	31 33
	52	139	26.96	1.27			
	56	129	24.98	1.48			
	64	112	21.66	1.70			
	69	104	20.24	1.82			
	73	98	18.96	1.94			
	78	92	17.80	2.1			
	88	81	15.76	2.3			
	96	74	14.44	2.4			
	105	68	13.27	2.6			
	114	63	12.22	2.8			
	133	54	10.43	3.0			
	144	50	9.65	3.2			
	174	41	8.00	3.6			
	204	35	6.80	3.9			
	239	30	5.82	4.5			
	278	26	5.00	5.0			
	327	22	4.25	5.5			
	354	20	3.93	5.7			
	413	17	3.37	13.1			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.75	260	28	5.35	2.6	RX67 RXF67	4P 4P	29 30
	297	24	4.68	3.2			
	316	23	4.40	3.4			
	336	21	4.14	3.8			
	355	20	3.91	4.1			
	376	19	3.70	4.3			
	397	18	3.50	4.7			
	434	16	3.20	5.8			
	535	13	2.60	8.4			
	612	12	2.27	11			
	321	22	4.33	2.9	RX 47 RXF47	4P 4P	25 26
	343	21	405	3.1			
	366	20	3.80	3.3			
	389	18	3.57	3.6			
	414	17	3.36	3.6			
	438	16	3.17	3.8			
	489	15	2.84	4.3			
	517	14	2.69	4.7			
	543	13	2.56	5.0			
	632	11	2.20	5.8			
	728	9.8	1.91	6.7			
	832	8.6	1.67	7.6			
1.1	0.52	17057	2674	1.00	R167 R97 RF167 R97	4P 4P	976 986
	0.60	14901	2336	1.15			
	0.67	13307	2086	1.29			
	0.75	11935	1871	1.43			
	0.84	10645	1669	1.61			
	0.96	9335	1464	1.83			
	1.1	8278	1298	2.1			
	1.3	7125	1117	2.4			
	0.62	14411	2260	0.86	R 147 R77 RF147 R77	4P 4P	557 567
	0.72	12410	1946	1.00			
	0.82	10904	1710	1.13			
	0.90	9879	1549	1.25			
	1.0	8638	1354	1.43			
	1.2	7601	1192	1.62			
	1.4	6590	1033	1.87			
	1.6	5728	898	2.2			
	1.8	5016	786	2.5			
	2.0	4433	695	2.8			
	0.98	9106	1428	0.83	R 137 R77 RF137 R77	4P 4P	377 397
	1.0	8766	1374	0.87			
	1.1	8041	1261	0.95			
	1.2	7751	1215	0.98			
	1.3	7070	1109	1.07			
	1.3	6810	1068	1.12	R 137 R77 RF137 R77	4P 4P	377 397
	1.3	6622	1038	1.15			
	1.4	6160	966	1.23			
	1.6	5675	890	1.34			
	1.7	5221	819	1.46			
	1.9	4749	745	1.60			
	2.2	3983	624	1.91			
	2.5	3623	568	2.1			
	2.8	3173	498	2.4			
	1.9	4604	722	0.89	R107 R77 RF107 R77	4P 4P	277 282
	2.3	3954	620	1.03			
	2.6	3460	542	1.18			
	2.8	3161	496	1.29			
	3.4	2643	414	1.55			
	3.7	2382	374	1.71			
	4.3	2083	327	1.96			
	4.9	1817	285	2.2			
	5.5	1616	253	2.5			
	3.3	2720	427	1.05	R 97 R57 RF97 R57	4P 4P	183 188
	3.7	2400	376	1.19			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
1.1	4.2	2149	337	1.33	R 97 R57 RF97 R57	4P 4P	183 188
	4.7	1895	297	1.50			
	5.7	1577	247	1.81			
	6.0	1485	233	1.92			
	6.7	1334	209	2.1			
	5.1	1744	273	0.84	R 87 R57 RF87 R57	4P 4P	133 140
	5.4	1639	257	0.90			
	6.0	1494	234	0.99			
	6.1	1471	231	1.00			
	6.8	1317	206	1.12			
	7.2	1238	194	1.19			
	2.7	3855	249.55	1.06	R 107 RF107	8P 8P	234 239
	2.9	3598	232.91	1.14			
	3.3	3165	204.89	1.29			
	3.9	2664	172.41	1.53			
	3.6	2932	254.02	0.97	R 97 RF97	6P 6P	155 170
	3.8	2774	240.29	1.03			
	4.1	2563	221.98	1.11			
	4.7	2214	191.83	1.29			
	5.5	1906	254.02	1.50	R 97 RF97	4P 4P	151 166
	5.8	1803	240.29	1.58			
	6.3	1666	221.98	1.71			
	6.8	1545	205.96	1.84			
	7.3	1439	191.83	1.98			
	7.8	1345	179.26	2.1			
	8.3	1261	168.02	2.3			
	9.4	1116	148.75	2.6			
	11	979	130.44	2.9			
	12	866	115.46	3.3			
	13	818	108.95	3.5			
	14	773	102.98	3.7			
	14	732	97.49	3.9			
	15	693	92.42	4.1			
	16	642	85.50	4.4			
	17	602	80.17	4.7			
	20	532	70.96	5.4			
	21	502	66.96	5.7			
	22	475	63.29	6.0			
	23	450	59.92	6.3			
	26	405	53.91	7.0			
	6.6	1583	211.01	0.93	R 87 RF87	4P 4P	101 108
	7.1	1477	196.79	1.00			
	7.6	1382	184.15	1.07			
	9.1	1152	153.46	1.28			
	9.6	1089	145.09	1.35	R 87 RF87	4P 4P	101 108
	12	908	120.96	1.62			
	12	844	112.54	1.74			
	13	788	105.00	1.87			
	14	745	99.30	1.98			
	15	691	92.08	2.1			
	18	599	79.80	2.5			
	19	559	74.54	2.6			
	20	523	69.76	2.8			
	21	491	65.39	3.0			
	23	461	61.38	3.2			
	24	429	57.20	3.4			
	26	401	53.38	3.7			
	28	374	49.88	3.9			
	30	350	46.65	4.2			
	37	281	37.47	5.2			
	43	244	32.58	6.0			
	49	214	28.48	6.7			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
1.1	12	889	118.42	0.88	R 77	4P	71
	13	831	110.77	0.94	RF77	4P	77
	13	779	103.85	1.00			
	15	697	92.91	1.12			
	16	649	86.54	1.20			
	17	606	80.77	1.29			
	19	567	75.52	1.37			
	20	531	70.74	1.47			
	21	498	66.35	1.56			
	22	468	62.31	1.67			
	24	440	58.58	1.77			
	27	390	51.92	2.0			
	30	348	46.42	2.2			
	32	324	43.24	2.4			
	35	303	40.35	2.6			
	37	283	37.73	2.8			
	40	265	35.34	2.9			
	42	249	33.15	3.1			
	45	234	31.13	3.3			
	48	220	29.27	3.5			
	54	195	25.94	3.8			
	16	662	88.24	0.86	R 67	8P	61
	19	557	74.18	1.02	RF67	8P	64
	20	521	69.48	1.09			
	21	489	65.22	1.16			
	23	460	61.36	1.24			
	24	434	57.82	1.31			
	26	410	54.59	1.39			
	27	387	51.61	1.47			
	30	348	46.32	1.64			
	33	321	42.83	1.74			
	35	298	39.70	1.85			
	38	277	36.86	1.96			
	41	257	34.29	2.0			
	44	240	31.93	2.1			
	47	223	29.76	2.2			
	48	218	29.09	2.4	R 67	4P	61
	52	201	26.76	2.6	RF67	4P	64
	57	186	24.73	2.8			
	61	172	22.93	3.1			
	70	149	19.90	3.8			
	75	140	18.62	4.0			
	80	131	17.45	4.3			
	90	117	15.62	4.5			
	96	109	14.55	4.8			
	103	102	13.58	5.0			
	110	95	12.69	5.2			
	118	89	11.89	5.3			
	126	84	11.15	5.7			
	134	79	10.47	5.7			
	142	74	9.85	6.0	R 67	4P	61
	160	65	8.73	6.4	RF67	4P	64
	183	58	7.67	6.3			
	195	54	7.17	6.5			
	209	50	6.71	6.6			
	222	47	6.30	6.6			
	237	44	5.91	6.9			
	252	42	5.56	7.1			
	284	37	4.93	7.4			
	21	511	68.05	0.84	R 57	4P	49
	22	479	63.88	0.89	RF57	4P	53
	23	451	60.10	0.95			
	25	425	56.64	1.01			
	26	401	53.47	1.07			
	28	397	50.55	1.13			
	28	369	49.18	1.16			
	31	340	45.37	1.26			
	33	315	41.96	1.36			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
1.1	36	292	38.89	1.47	R57	4P	49
	39	271	36.11	1.58	RF57	4P	53
	42	252	33.58	1.70			
	45	235	31.28	1.82			
	48	219	29.16	1.95			
	51	204	27.22	2.1			
	53	198	26.36	2.2	R57	4P	49
	58	182	24.25	2.3	RF57	4P	53
	62	168	22.41	2.5			
	67	156	20.78	2.7			
	78	135	18.04	3.2			
	83	127	16.87	3.4			
	89	119	15.82	3.5			
	92	114	15.23	3.6			
	99	106	14.15	3.8			
	106	99	13.18	4.0			
	114	92	12.30	4.2			
	122	86	11.50	4.5			
	130	81	10.77	4.6			
	139	76	10.11	4.8			
	148	71	9.49	4.9			
	157	67	8.92	5.3			
	29	368	49.09	0.80	R47	4P	41
	31	340	45.29	0.84	RF47	4P	41
	33	314	41.88	0.91			
	36	291	38.82	0.98			
	39	270	36.05	1.05			
	42	252	33.52	1.13			
	45	234	31.22	1.22			
	48	218	29.11	1.30			
	52	204	27.17	1.40			
	62	171	22.75	1.67			
	59	179	23.81	1.60	R47	4P	41
	63	166	22.18	1.71	RF47	4P	41
	68	155	20.72	1.80			
	72	146	19.41	1.90			
	77	137	18.22	2.0			
	82	129	17.14	2.1			
	87	121	16.15	2.2			
	100	105	14.03	2.4			
	108	97	12.94	2.4			
	117	90	11.97	2.6			
	136	77	10.30	2.8			
	146	72	9.58	3.0			
	157	67	8.92	3.1			
	180	58	7.76	2.7			
	185	57	7.55	2.7			
	200	53	7.00	2.9			
	215	49	6.50	3.1			
	232	45	6.05	3.3			
	249	42	5.63	3.5			
	286	37	4.90	3.9			
	44	236	31.46	0.80	R 37	4P	36
	49	216	28.76	0.88	RF37	4P	38
	53	198	26.34	0.96			
	58	181	24.16	1.05			
	48	219	29.20	0.87			
	52	202	26.96	0.87			
	56	187	24.98	1.01			
	65	162	21.66	1.17			
	69	152	20.24	1.25			
	74	142	18.96	1.34			
	79	134	17.80	1.42			
	89	118	15.76	1.61			
	97	108	14.44	1.67			
	105	100	13.27	1.81			
	115	92	12.22	1.90			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
1.1	134	78	10.43	2.1	R 37	4P	36
	145	72	9.65	2.2	RF37	4P	38
	175	60	8.00	2.5			
	206	51	6.80	2.7			
	241	44	5.82	3.1			
	280	38	5.00	3.4			
	329	32	4.25	3.8			
	356	29	3.93	3.9			
	415	25	3.37	4.2			
	257	41	5.45	2.6	RX 77	4P	51
	272	39	5.14	2.5	RXF77	4P	56
	304	35	4.61	3.4			
	320	33	4.38	4.1			
	370	28	3.78	5.1			
	424	25	3.30	7.0			
	481	22	2.91	9.4			
	543	19	2.58	11			
	606	17	2.31	11			
	676	16	2.07	12			
	749	14	1.87	13			
	870	12	1.61	14			
	1007	10	1.39	14			
	299	35	4.68	2.2	RX 67	4P	34
	318	33	4.40	2.3	RXF67	4P	35
	338	31	4.14	2.6			
	358	29	3.91	2.8	RX67	4P	34
	378	28	3.70	3.0	RXF67	4P	35
	400	26	3.50	3.3			
	438	24	3.20	4.0			
	538	20	2.60	5.7			
	617	17	2.27	7.3			
	791	13	1.77	9.0			
	892	12	1.57	9.2			
	1000	11	1.40	9.4			
	368	29	3.80	2.3	SRX47	4P	30
	392	27	3.57	2.4	SRXF47	4P	31
	417	25	3.36	2.4			
	442	24	3.17	2.6			
	493	21	2.84	3.0			
	520	20	2.69	3.2			
	547	19	2.56	3.4			
	636	17	2.20	4.0			
	733	14	1.91	4.6			
	838	13	1.67	5.2			
	959	11	1.46	5.9			
	1085	9.7	1.29	6.2			
1.5	0.60	20319	2336	0.84	R167 R97	4P	980
	0.67	18146	2086	0.94	RF167 R97	4P	990
	0.75	16275	1871	1.05			
	0.84	14515	1669	1.18			
	0.96	12730	1464	1.34			
	1.1	11288	1298	1.51			
	1.3	9716	1117	1.76			
	1.4	8695	1000	1.97			
	3.3	3668	422	3.4	R147 R87	4P	592
	3.8	3209	369	3.8	RF147 R87	4P	602
	0.82	14868	1710	0.83	R147 R77	4P	561
	0.90	13471	1549	0.92	RF147 R77	4P	571
	1.0	11779	1354	1.05			
	1.2	10365	1192	1.19			
	1.4	8986	1033	1.37			
	1.6	7811	898	1.58			
	1.8	6839	786	1.81			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
1.5	2.2	5490	631	2.2	R147 R77	4P	561
	2.5	4814	553	2.6	RF147 R77	4P	571
	1.3	9287	1068	0.82	R 137 R77	4P	381
	1.3	9030	1038	0.84	RF137 R77	4P	401
	1.4	8400	966	0.90			
	1.6	7738	890	0.98			
	1.7	7119	819	1.07			
	1.9	6476	745	1.17			
	2.0	5970	686	1.27			
	2.2	5431	624	1.40			
	2.3	5228	601	1.45			
	2.5	4940	568	1.54			
	2.8	4327	498	1.76			
	3.3	3652	420	2.1			
	3.6	3361	386	2.3			
	4.3	2840	326	2.7			
	2.6	4718	542	0.87	R 107 R77	4P	281
	2.7	4594	528	0.89	RF107 R77	4P	286
	2.8	4311	496	0.95			
	3.0	4084	470	1.00			
	3.4	6304	414	1.13			
	3.7	3249	374	1.26			
	4.3	2840	327	1.44			
	4.2	2930	337	0.97	R97 R57	4P	187
	4.7	2583	297	1.10	RF97 R57	4P	192
	5.7	2150	247	1.33			
	6.0	2026	233	1.41			
	6.7	1820	209	1.57			
	3.0	4835	232.91	0.84	R 107	8P	242
	3.4	4254	204.89	0.96	RF107	8P	247
	4.0	3579	172.41	1.14			
	4.4	3224	155.27	1.27			
	3.7	3886	249.55	1.05	R 107	6P	231
	4.0	3627	232.91	1.13	RF107	6P	236
	4.5	3190	204.89	1.28			
	5.3	2685	172.41	1.52			
	5.9	2418	155.27	1.69			
	6.3	2263	145.35	1.80			
	5.5	2599	254.02	1.10	R97	4P	155
	5.8	2459	240.29	1.16	RF97	4P	170
	6.3	2271	221.98	1.25			
	6.8	2107	205.96	1.35			
	7.3	1963	191.83	1.45			
	7.8	1834	179.26	1.55			
	8.3	1719	168.02	1.66			
	9.4	1522	148.75	1.87			
	11	1335	130.44	2.1			
	12	1181	115.46	2.4			
	13	1115	108.95	2.6			
	14	1054	102.98	2.7			
	14	998	97.49	2.9			
	15	946	92.42	3.0			
	16	875	85.50	3.3			
	17	820	80.17	3.5			
	20	726	70.96	3.9			
	21	685	66.96	4.2			
	22	648	63.29	4.4			
	23	613	59.92	4.6			
	26	552	53.91	5.2			
	7.6	1884	184.15	0.80	R 87	4P	105
	9.1	1570	153.46	0.94	RF87	4P	112
	9.6	1485	145.09	0.99			
	12	1238	120.96	1.19			
	12	1152	112.54	1.28			
	13	1074	105.00	1.37			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
1.5	13	1074	105.00	1.37	R87	4P	105
	14	1016	99.30	1.45	RF87	4P	112
	15	942	92.08	1.56			
	18	817	79.80	1.80			
	19	763	74.54	1.93			
	20	714	69.76	2.1			
	21	669	65.39	2.2			
	23	628	61.38	2.3			
	24	585	57.20	2.5			
	26	546	53.38	2.7			
	28	510	49.88	2.9			
	30	477	46.65	3.1			
	34	419	40.92	3.5			
	37	383	37.47	3.8			
	43	333	32.58	4.4			
	49	291	28.48	4.9			
	15	951	92.91	0.82	R 77	4P	75
	16	885	86.54	0.88	RF77	4P	81
	17	826	80.77	0.94			
	19	773	75.52	1.01			
	20	724	70.74	1.08			
	21	679	66.35	1.15			
	22	638	62.31	1.22			
	24	599	58.58	1.30			
	27	531	51.92	1.47			
	30	475	46.42	1.64			
	32	442	43.24	1.76	R 77	4P	75
	35	413	40.35	1.89	RF77	4P	81
	37	386	37.73	2.0			
	40	362	35.34	2.2			
	42	339	33.15	2.3			
	45	319	31.13	2.4			
	48	299	29.27	2.6			
	54	265	25.94	2.8			
	59	242	23.65	3.22	R 77	4P	75
	64	225	22.00	3.46	RF77	4P	81
	68	210	20.53	3.66			
	72	199	19.41	3.83			
	78	184	18.00	4.02			
	23	628	61.36	0.91	R 67	4P	65
	24	592	57.82	0.96	RF67	4P	68
	26	559	54.59	1.02			
	27	528	51.61	1.08			
	30	474	46.32	1.20			
	33	438	42.83	1.28			
	35	406	39.70	1.36			
	38	377	36.86	1.44			
	41	351	34.29	1.50			
	44	327	31.93	1.57			
	47	305	29.78	1.62			
	48	298	29.09	1.72	R 67	4P	65
	52	274	26.76	1.87	RF67	4P	68
	57	253	24.73	2.1			
	61	235	22.93	2.3			
	70	204	19.90	2.8			
	75	191	18.62	3.0			
	80	179	17.45	3.1			
	90	160	15.62	3.3			
	96	149	14.55	3.5			
	103	139	13.58	3.7			
	110	130	12.69	3.8			
	118	122	11.89	3.9			
	126	114	11.15	4.2			
	134	107	10.47	4.2			
	142	101	9.85	4.4			
	160	89	8.73	4.7			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
1.5	183	78	7.67	4.6	R 67	4P	65
	195	73	7.17	4.8	RF67	4P	68
	209	69	6.71	4.8			
	222	64	6.30	4.9			
	237	61	5.91	5.0			
	252	57	5.56	5.2			
	284	50	4.93	5.5			
	26	547	53.47	0.80			
	28	517	50.55	0.83	R57	4P	53
	28	503	49.18	0.85	RF57	4P	67
	31	464	45.37	0.92			
	33	429	41.96	1.00			
	36	398	38.89	1.07			
	39	369	36.11	1.16			
	42	344	33.58	1.24			
	45	320	31.28	1.34			
	48	298	29.16	1.43			
	51	279	27.22	1.53			
	53	270	26.36	1.58	R 57	4P	53
	58	248	24.25	1.72	RF57	4P	67
	62	229	22.41	1.86			
	67	213	20.78	2.0			
	78	185	18.04	2.3			
	83	173	16.87	2.5			
	89	162	15.82	2.6			
	92	156	15.23	2.7			
	99	145	14.15	2.8	R 57	4P	53
	106	135	13.18	3.0	RF57	4P	67
	114	126	12.30	3.1			
	122	118	11.50	3.3			
	130	110	10.77	3.4			
	139	103	10.11	3.5			
	148	97	9.49	3.6			
	157	91	8.92	3.9			
	177	81	7.91	4.2			
	188	76	7.45	4.4			
	224	64	6.25	5.0			
	239	60	5.86	5.1			
	254	56	5.51	5.2			
	270	53	5.18	5.5			
	39	369	36.05	0.80	R 47	4P	45
	42	343	33.52	0.83	RF47	4P	45
	45	319	31.22	0.89			
	48	298	29.11	0.96			
	52	278	27.17	1.03			
	62	233	22.75	1.22			
	59	244	23.81	1.17	R 47	4P	45
	63	227	22.18	1.26	RF47	4P	45
	68	212	20.72	1.32			
	72	199	19.41	1.40			
	77	186	18.22	1.48			
	82	175	17.14	1.52			
	87	165	16.15	1.58			
	1 00	144	14.03	1.75			
	108	132	12.94	1.79			
	117	122	11.97	1.90			
	136	105	10.30	2.1			
	146	98	9.58	2.2			
	157	91	8.92	2.3			
	180	79	7.76	1.95			
	185	77	7.55	1.98			
	200	72	7.00	2.1			
	215	67	6.50	2.3			
	232	62	6.05	2.4			
	249	58	5.63	2.6			
	286	50	4.90	2.8			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
1.5	74	194	18.96	0.98	R 37 RF37	4P 4P	40 42
	79	182	17.80	1.04			
	89	161	15.76	1.18			
	97	148	14.44	1.22			
	105	136	13.27	1.33			
	115	125	12.22	1.39			
	134	107	10.43	1.51			
	145	99	9.65	1.61			
	175	82	8.00	1.81			
	206	70	6.80	1.97			
	241	60	5.82	2.3			
	280	51	5.00	2.5			
	329	43	4.25	2.8			
	356	40	3.93	2.9			
	415	34	3.37	3.1			
	257	56	5.45	1.87	RX 77 RXF77	4P 4P	55 60
	272	53	5.14	1.86			
	304	47	4.61	2.5			
	320	45	4.38	3.0			
	370	39	3.78	3.8			
	424	34	3.30	5.1			
	481	30	2.91	6.9			
	543	26	2.58	7.7			
	606	24	2.31	8.2			
	676	21	2.07	9.0			
	749	19	1.87	9.3			
	870	16	1.61	10			
	1007	14	1.39	10			
	299	48	4.68	1.63	RX 67 RXF67	4P 4P	38 39
	318	45	4.40	1.69			
	338	42	4.14	1.91			
	358	40	3.91	2.1			
	378	38	3.70	2.2			
	400	36	3.50	2.4			
	438	33	3.20	2.9			
	538	27	2.60	4.2			
	617	23	2.27	5.3			
	791	18	1.77	6.6			
	892	16	1.57	6.7			
	1000	14	1.40	6.9			
	368	39	3.80	1.69	RX 47 RXF47	4P 4P	34 35
	392	37	3.57	1.79			
	417	34	3.36	1.80			
	442	32	3.17	1.90			
	493	29	2.84	2.2			
	520	28	2.69	2.4			
	547	26	2.56	2.5			
	636	23	2.20	2.9			
	733	20	1.91	3.4			
	838	17	1.67	3.8			
	959	15	1.46	4.3			
	1085	13	1.29	4.5			
2.2	0.85	20989	1669	0.81	R 167 R97 RF167 R97	4P 4P	988 998
	0.97	18408	1464	0.93			
	1.1	16323	1298	1.05			
	1.3	14049	1117	1.22			
	1.4	12573	1000	1.36			
	1.6	10945	870	1.56			
	1.9	9649	767	1.77			
	2.2	8233	655	2.1			
	2.7	6687	532	1.85	R147 R87 RF147 R87	4P 4P	600 610
	3.1	5839	464	2.1			
	3.4	5304	422	2.3			
	3.8	4641	369	2.7			
	4.3	4170	332	3.0			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N·m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
2.2	1.2	14988	1192	0.82	R 147 R77	4P	569
	1.4	12994	1033	0.95	RF147 R77	4P	579
	1.6	11294	898	1.09			
	1.8	9890	786	1.25			
	2.0	8741	695	1.41			
	2.2	7939	631	1.56			
	2.6	6961	553	1.77			
	3.0	6045	481	2.0			
	1.9	9364	745	0.81	R 137 R77	4P	389
	2.1	8633	686	0.88	RF137 R77	4P	409
	2.3	7854	624	0.97			
	2.4	7560	601	1.01			
	2.5	7144	568	1.06			
	2.9	6257	498	1.21			
	3.4	5281	420	1.44			
	3.7	4860	386	1.56			
	4.3	4106	326	1.85			
	4.8	3694	294	2.1			
	5.6	3208	255	2.4			
	6.4	2799	223	2.7			
	3.8	4697	374	0.87	R 107 R77	4P	289
	4.4	4020	320	1.02	RF107 R77	4P	294
	4.3	4107	327	0.99			
	5.0	3583	285	1.14			
	5.6	3187	253	1.28			
	6.5	2758	219	1.48			
	6.1	2929	233	0.97	R 97 R57	4P	195
	6.8	2631	209	1.08	RF97 R57	4P	200
	3.2	6666	225.27	1.14	R 137	8P	356
	3.9	5434	183.63	1.40	RF137	8P	376
	4.1	5079	171.64	1.50			
	4.4	4762	160.91	1.60			
	5.0	4217	142.52	1.80			
	5.6	3768	127.33	2.0			
	6.2	3390	114.57	2.2			
	6.8	3069	103.70	2.5			
	4.6	4580	204.89	0.89	R 107	6P	241
	5.5	3854	172.41	1.06	RF107	6P	246
	6.1	3471	155.27	1.18			
	6.5	3249	145.35	1.26			
	5.7	3692	249.55	1.11	R107	4P	233
	6.1	3446	232.91	1.19	RF107	4P	238
	6.9	3032	204.89	1.35			
	8.2	2551	172.41	1.60			
	9.1	2297	155.27	1.78			
	9.8	2151	145.35	1.90			
	10	2018	136.42	2.0			
	11	1899	128.34	2.2			
	12	1790	120.99	2.3			
	12	1691	114.28	2.4			
	13	1600	108.14	2.6			
	14	1516	102.48	2.7			
	15	1367	92.42	3.0			
	19	1134	76.63	3.6			
	20	1071	72.38	3.8			
	21	1013	68.49	4.0			
	22	960	64.90	4.3			
	24	866	58.54	4.7			
	6.4	3284	221.98	0.87	R 97	4P	163
	6.9	3047	205.96	0.94	RF97	4P	178
	7.4	2838	191.83	1.00			
	7.9	2652	179.26	1.07			
	8.5	2486	168.02	1.15			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
2.2	9.5	2201	148.75	1.29	R97	4P	163
	11	1930	130.44	1.48	RF97	4P	178
	12	1708	115.46	1.67			
	13	1612	108.95	1.77			
	14	1524	102.98	1.87			
	15	1442	97.49	1.98			
	15	1367	92.42	2.1			
	17	1265	85.50	2.3			
	18	1186	80.17	2.4			
	20	1050	70.96	2.7			
	21	991	66.96	2.9			
	22	936	63.29	3.0			
	24	886	59.92	3.2			
	26	798	53.91	3.6			
	30	696	47.06	4.1			
	34	624	42.19	4.6			
	37	562	37.97	5.1			
	40	520	35.16	5.4			
	44	482	32.60	5.7			
	50	416	28.13	6.1			
	12	1790	120.96	0.82	R 87	4P	113
	13	1665	112.54	0.88	RF87	4P	120
	14	1554	105.00	0.95			
	14	1469	99.30	1.00			
	15	1362	92.08	1.08			
	18	1181	79.80	1.25			
	19	1103	74.54	1.34			
	20	1032	69.76	1.43			
	22	967	65.39	1.52			
	23	908	61.38	1.62			
	25	846	57.20	1.74			
	27	790	53.38	1.86			
	28	738	49.88	2.0			
	30	690	46.65	2.1			
	35	605	40.92	2.4			
	38	554	37.47	2.7			
	44	482	32.58	3.'			
	50	421	28.48	3.4			
	52	400	27.06	3.7	R 87	4P	113
	56	375	25.36	3.9	RF87	4P	120
	60	353	23.84	4.2			
	68	311	21.00	4.6			
	72	291	19.69	4.7			
	81	258	17.43	5.1			
	86	243	16.45	5.3			
	91	230	15.55	5.5			
	96	218	14.72	5.8			
	102	206	13.95	6.0			
	107	196	13.24	6.2			
	116	181	12.23	6.5			
	21	982	66.35	0.80	R 77	4P	83
	23	922	62.31	0.85	RF77	4P	89
	24	867	58.58	0.90			
	27	768	51.92	1.01			
	31	687	46.42	1.13			
	33	640	43.24	1.22			
	35	597	40.35	1.30			
	38	558	37.73	1.40			
	40	523	35.34	1.49			
	43	490	33.15	1.59			
	46	461	31.13	1.69			
	49	433	29.27	1.80			
	55	384	25.94	1.93			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N·m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
2.2	60	350	23.65	2.2	R 77	4P	83
	65	326	22.00	2.4	RF77	4P	89
	69	304	20.53	2.5			
	73	287	19.41	2.6			
	79	266	18.00	2.8			
	91	231	15.60	3.0			
	97	216	14.57	3.2			
	104	202	13.64	3.4			
	36	587	39.70	0.94	R 67	4P	73
	39	545	36.86	0.99	RF67	4P	76
	41	507	34.29	1.04			
	44	472	31.93	1.09			
	48	441	29.78	1.12			
	62	339	22.93	1.57	R 67	4P	73
	71	294	19.90	1.94	RF67	4P	76
	76	275	18.62	2.1			
	81	258	17.45	2.2			
	91	231	15.62	2.3			
	98	215	14.55	2.4			
	105	201	13.58	2.5			
	112	188	12.69	2.6			
	119	176	11.89	2.7			
	127	165	11.15	2.9			
	136	155	10.47	2.9			
	144	146	9.85	3.1			
	163	129	8.73	3.2			
	185	113	7.67	3.2			
	198	106	7.17	3.3			
	211	99	6.71	3.3			
	225	93	6.30	3.4			
	240	88	5.91	3.5			
	255	82	5.56	3.6			
	288	73	4.93	3.8			
	37	575	38.89	0.80	R 57	4P	61
	39	534	36.11	0.80	RF57	4P	65
	42	497	33.58	0.86			
	45	463	31.28	0.92			
	49	432	29.16	0.99			
	52	403	27.22	1.06			
	63	332	22.41	1.29	R 57	4P	61
	68	307	20.78	1.39	RF57	4P	65
	79	267	8.04	1.60			
	84	250	6.87	1.71			
	90	234	15.82	1.79			
	93	225	15.23	1.83			
	100	209	14.15	1.95			
	108	195	13.18	2.0			
	115	182	12.30	2.1			
	123	170	11.50	2.3			
	132	159	10.77	2.3			
	141	150	10.11	2.4			
	150	140	9.49	2.5			
	159	132	8.92	2.7			
	180	117	7.91	2.9			
	190	110	7.45	3.0			
	227	92	6.25	3.4			
	242	87	5.86	3.5			
	258	81	5.51	3.6			
	274	77	5.18	3.8			
	328	64	4.32	4.2			
	73	287	19.41	0.97	R47	4P	53
	78	270	18.22	1.02	RF47	4P	53
	83	254	17.14	1.05			
	88	239	16.15	1.09			
	101	208	14.03	1.21			
	110	191	2.94	1.24			
	119	177	11.97	1.31			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
2.2	138	152	10.30	1.43	R 47 RF47	4P 4P	53 53
	148	142	9.58	1.51			
	159	132	8.92	1.58			
	183	115	7.76	1.35			
	188	112	7.55	1.37			
	203	104	7.00	1.46			
	218	96	6.50	1.56			
	235	89	6.05	1.66			
	252	83	5.63	1.77			
	290	72	4.90	1.97			
	90	233	15.76	0.81	R 37 RF37	4P 4P	48 50
	98	214	14.44	0.84			
	107	196	13.27	0.92			
	116	181	12.22	0.96			
	136	154	10.43	1.05			
	147	143	9.65	1.11			
	178	118	8.00	1.25			
	209	101	6.80	1.36			
	244	86	5.82	1.57			
	284	74	5.00	1.73			
	334	63	4.25	1.90			
	361	58	3.93	1.99			
	421	50	3.37	2.1			
	272	77	5.22	3.1	RX 87 RXF87	4P 4P	83 88
	309	68	4.60	4.0			
	347	61	4109	4.7			
	387	54	3.67	5.3			
	429	49	3.31	7.9			
	500	42	2.84	9.2			
	597	35	2.38	11			
	673	31	2.11	12			
	324	65	4.38	2.1	RX 77 RXF77	4P 4P	63 68
	376	56	3.78	2.6			
	430	49	3.30	3.5			
	488	43	2.91	4.7			
	550	38	2.58	5.4			
	615	34	2.31	5.7			
	686	31	2.07	6.2			
	759	28	1.87	6.4			
	882	24	1.61	6.9			
	1022	21	1.39	7.2			
	406	52	3.50	1.65	RX67 RXF67	4P 4P	46 47
	444	47	3.20	2.0			
	546	38	2.60	2.9			
	626	34	2.27	3.7			
	802	26	1.77	4.6			
	904	23	1.57	4.7			
	1014	21	1.40	4.8			
	555	38	2.56	1.73	RX 47 RXF47	4P 4P	42 43
	645	33	2.20	2.0			
	743	28	1.91	2.3			
	850	25	1.67	2.7			
	973	22	1.46	3.0			
	1101	19	1.29	3.1			
3	1.3	19158	1117	0.89	R167 R97 RF167 R97	4P 4P	992 1002
	1.4	17144	1000	1.00			
	1.6	14925	870	1.15			
	1.9	13158	767	1.30			
	212	11227	655	1.52			
	2.8	8624	503	1.98			
	2.7	9119	532	1.35	R 147 R87 RF147 R87	4P 4P	604 614
	3.1	7962	464	1.55			
	3.4	7232	422	1.71			
	3.8	6328	369	1.95			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N・m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
3	4.3	5687	332	2.2	R147 R87	4P	604
	5.1	4759	278	2.6	RF147 R87	4P	614
	1.6	15401	898	0.80	R 147 R77	4P	573
	1.8	13486	786	0.92	RF147 R77	4P	583
	2.0	11920	695	1.04			
	2.2	10826	631	1.14			
	2.6	9492	553	1.30			
	2.7	8887	518	0.86	R 137 R77	4P	393
	2.9	8533	498	0.89	RF137 R77	4P	413
	3.1	7775	453	0.98			
	3.4	7202	420	1.06			
	3.7	6627	386	1.15			
	4.3	5599	326	1.36			
	4.8	5038	294	1.51			
	5.6	4375	255	1.74			
	6.4	3817	223	1.99			
	5.5	4408	257	0.93	R107 R77	4P	293
	5.6	4346	253	0.94	RF107 R77	4P	298
	6.5	3761	219	1109			
	7.8	3123	182	1.31			
	3.2	9090	225.27	0.84	R 137	8P	364
	3.9	7410	183.63	1.03	RF137	8P	384
	4.1	6926	171.64	1.10			
	4.4	6493	160.91	1.17			
	5.0	5751	142.52	1.32			
	5.6	5138	127.33	1.48			
	6.2	4623	114.57	1.64			
	6.8	4184	103.70	1.82			
	8.1	3552	88.03	2.1			
	4.3	6723	225.27	1.31	R 137	6P	364
	5.2	5480	183.63	1.39	RF137	6P	384
	5.6	5122	171.64	1.48			
	6.0	4802	160.91	1.58			
	6.7	4253	142.52	1.79			
	7.5	3800	127.33	2.0			
	8.4	3419	114.57	2.2			
	9.3	3095	103.70	2.5			
	6.2	4634	155.27	0.88	R 107	6P	264
	6.6	4338	145.35	0.94	RF107	6P	269
	7.5	3830	128.34	1.07			
	6.1	4699	232.91	0.87	R 107	4P	237
	6.9	4134	204.89	0.99	RF107	4P	242
	8.2	3479	172.41	1.17			
	9.1	3133	155.27	1.30			
	9.8	2933	145.35	1.39			
	10	2752	136.42	1.48			
	11	2589	128.34	1.58			
	12	2441	120.99	1.67			
	12	2306	114.28	1.77			
	13	2182	108.14	1.87			
	14	2068	102.48	1.98			
	15	1865	92.42	2.2			
	19	1546	76.63	2.6			
	20	1460	72.38	2.8			
	21	1382	68.49	3.0			
	22	1310	64.90	3.1			
	24	1181	58.54	3.5			
	9.5	3001	148.75	0.95	SR97	4P	167
	11	2632	130.44	1.08	SRF97	4P	172
	12	2330	115.46	1.22			
	13	2198	108.95	1.30			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
3	14	2078	102.98	1.37	R 97	4P	167
	15	1967	97.49	1.45	RF97	4P	172
	15	1865	92.42	1.53			
	17	1725	85.50	1.65			
	18	1617	80.17	1.76			
	20	1432	70.96	1.99			
	21	1351	66.96	2.1			
	22	1277	63.29	2.2			
	24	1209	59.92	2.4			
	26	1088	53.91	2.6			
	30	950	47.06	3.0			
	34	851	42.19	3.3			
	37	766	37.97	3.7			
	40	709	35.16	4.0			
	44	658	32.60	4.2			
	50	568	28.13	4.5			
	15	1858	92.08	0.80	R 87	4P	117
	18	1610	79.80	0.91	RF87	4P	124
	19	1504	74.54	0.98			
	20	1407	69.76	1.05			
	22	1319	65.39	1.12			
	23	1238	61.38	1.19			
	25	1154	57.20	1.28			
	27	1077	53.38	1.37			
	28	1006	49.88	1.46			
	30	941	46.65	1.56			
	35	826	40.92	1.78			
	38	756	37.47	1.95			
	44	657	32.58	2.2			
	50	575	28.48	2.5			
	52	546	27.06	2.7	R 87	4P	117
	56	512	25.36	2.9	RF87	4P	124
	60	481	23.84	3.1			
	68	424	21.00	3.4			
	72	397	19.69	3.4			
	81	352	17.43	3.8			
	86	332	16.45	3.9			
	91	314	15.55	4.1			
	96	297	14.72	4.2			
	102	281	13.95	4.4			
	107	267	13.24	4.6			
	116	247	12.23	4.7			
	31	937	46.42	0.83	R 77	4P	87
	33	872	43.24	0.89	RF77	4P	93
	35	814	40.35	0.96			
	38	761	37.73	1.02			
	40	713	35.34	1.09			
	43	669	33.15	1.16			
	46	628	31.13	1.24			
	49	590	29.27	1.32			
	55	523	25.94	1.42			
	60	477	23.65	1.63	R 77	4P	87
	65	444	22.00	1.76	RF77	4P	93
	69	414	20.53	1.86			
	73	392	19.41	1.94			
	79	363	18.00	2.0			
	91	315	15.60	2.2			
	97	294	14.57	2.3			
	104	275	13.154	2.5			
	111	258	12.78	2.5			
	118	242	12.00	2.7			
	127	226	11.18	2.8			
	136	211	10.43	3.0			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
3	146	197	9.75	3.0	R 77	4P	87
	156	184	9.12	3.3	RF77	4P	93
	166	172	8.54	3.5			
	179	160	7.92	3.6			
	206	139	6.91	4.0			
	235	122	6.05	4.2			
	62	463	22.93	1.15	R67	4P	77
	71	402	19.90	1.42	RF67	4P	80
	76	376	18.62	1.50			
	81	352	17.45	1.59			
	91	315	15.62	1.69			
	98	293	14.55	1.78			
	105	274	13.58	1.86			
	112	256	12.69	1.93			
	119	240	11.89	1.98			
	127	225	11.15	2.1			
	136	211	10.47	2.1			
	144	199	9.85	2.2			
	163	176	8.73	2.4			
	185	155	7.67	2.3			
	198	145	7.17	2.4			
	211	135	6.71	2.5			
	225	127	6.30	2.5			
	240	119	5.91	2.5			
	255	112	5.56	2.6			
	288	99	4.93	2.8			
	52	549	27.22	0.80			
	63	452	22.41	0.95	R57	4P	65
	68	419	20.78	1.02	RF57	4P	69
	79	364	18.04	1.17			
	84	340	16.87	1.26			
	90	319	15.82	1.31			
	93	307	15.23	1.34			
	100	286	14.15	1.43			
	108	266	13.18	1.50			
	115	248	12.30	1.57			
	123	232	11.50	1.66			
	132	217	10.77	1.70			
	141	204	10.11	1.79			
	150	191	9.49	1.84			
	159	180	8.92	1.98			
	180	160	7.91	2.1			
	190	150	7.45	2.2			
	227	126	6.25	2.5			
	242	118	5.86	2.6			
	258	111	5.51	2.7			
	274	104	5.18	2.8			
	328	87	4.32	3.0			
	88	326	16.15	0.80	R 47	4P	57
	101	283	14.03	0.89	RF47	4P	57
	110	261	12.94	0.91			
	119	241	11.97	0.96			
	138	208	10.30	1.05			
	148	193	9.58	1.11			
	159	180	8.92	1.16			
	183	157	7.76	0.99			
	188	152	7.55	1.00			
	203	141	7.00	1.07			
	218	131	6.50	1.14			
	235	122	6.05	1.22			
	252	114	5.63	1.30			
	290	99	4.90	1.44			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N・m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
3	136	210	10.43	0.80	R 37 RF37	4P 4P	52 54
	147	195	9.65	0.81			
	178	161	8.00	0.92			
	209	137	6.80	1.00			
	244	117	5.82	1.15			
	284	101	5.00	1.27			
	334	86	4.25	1.40			
	361	79	3.93	1.46			
	421	68	3.37	1.57			
	272	105	5.22	2.3	RX87 RXF87	4P 4P	87 92
	309	93	4.60	3.0			
	347	83	4.09	3.5			
	387	74	3.67	3.9			
	429	67	3.31	5.8			
	500	57	2.84	6.7			
	597	48	2.38	8.0			
	673	43	2.11	8.6			
	324	88	4.38	1.54	RX 77 RXF77	4P 4P	67 72
	376	76	3.78	1.91			
	430	67	3.30	2.6			
	488	59	2.91	3.5			
	550	52	2.58	3.9			
	615	47	2.31	4.2			
	686	42	2.07	4.5			
	759	38	1.87	4.7			
	882	32	1.61	5.1			
	1022	28	1.39	5.3			
	406	71	3.50	1.21	RX 67 RXF67	4P 4P	50 51
	444	65	3.20	1.47			
	546	52	2.60	2.1			
	626	46	2.27	2.7			
	802	36	1.77	3.4			
	904	32	1.57	3.4			
	1014	28	1.40	3.5			
	555	52	2.56	1.27	RX 47 RXF47	4P 4P	46 47
	645	44	2.20	1.48			
	743	39	1.91	1.70			
	850	34	1.67	1.95			
	973	29	1.46	2.2			
	1101	26	1.29	2.3			
4	1.7	19624	870	0.87	R 167 R97 RF167 R97	4P 4P	1000 1010
	1.9	17300	767	0.99			
	2.2	14762	655	1.16			
	2.9	11339	603	1.51			
	3.9	8312	369	2.1			
	4.2	7648	339	2.2			
	2.7	1990	532	1.03	R 147 R87 RF147 R87	4P 4P	612 622
	3.1	0468	464	1.18			
	3.4	9509	422	1.30			
	3.9	8320	369	1.48			
	4.3	7477	332	1.65			
	5.2	6257	278	1.97			
	5.9	5520	245	2.2			
	6.7	4831	214	2.6			
	7.7	4228	188	2.9			
	9.2	3548	157	3.5			
	2.3	14234	631	0.87	R 147 R77 RF147 R77	4P 4P	581 591
	2.6	12480	553	0.99			
	3.0	0838	481	1.14			
	3.5	9298	412	1.33			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N・m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
4	3.7	8713	386	0.87	R 137 R77 RF137 R77	4P 4P	401 421
	3.8	8466	375	0.90			
	4.3	7589	337	1.00			
	4.4	7362	326	1.03			
	4.9	6657	295	1.14			
	4.9	6624	294	1.15			
	5.6	5752	255	1.32			
	6.5	5019	223	1.51			
	7.4	4365	194	0.94	R 107 R77 RF107 R77	4P 4P	301 306
	7.9	4106	182	0.99			
	8.3	3918	174	1.04			
	4.4	8633	162.72	1.43	R 147 RF147	8P 8P	585 595
	5.0	7716	145.42	1.60			
	6.1	6303	118.81	1.96			
	6.8	5622	105.97	2.2			
	4.2	9106	171.64	0.83	R 137 RF137	8P 8P	405 425
	4.5	8537	160.91	0.89			
	5.1	7561	142.52	1.01			
	5.7	6755	127.33	1.13			
	6.3	6078	114.57	1.25			
	6.9	5502	103.70	1.38			
	4.3	8964	225.27	0.85	R 137 RF137	6P 6P	376 396
	5.2	7307	183.63	1.04			
	5.6	6830	171.64	1.11			
	6.0	6403	160.91	1.19			
	6.7	5671	142.52	1.34			
	7.5	5067	127.33	1.50			
	8.4	4559	114.57	1.67			
	9.3	4126	103.70	1.84			
	11	3503	88.03	2.2			
	8.4	4574	172.41	0.89	R 107 RF107	4P 4P	245 250
	9.3	4119	155.27	0.99			
	9.9	3856	145.35	1.06			
	11	3619	136.42	1.13			
	11	3405	128.34	1.20			
	12	3210	120.99	1.27			
	13	3032	114.28	1.35			
	13	2869	108.14	1.42			
	14	2719	102.48	1.50			
	16	2452	92.42	1.67			
	19	2033	76.63	2.0			
	20	1920	72.38	2.1			
	21	1817	68.49	2.2			
	22	1722	64.90	2.4			
	25	1553	58.54	2.6			
	26	1442	54.35	2.8			
	31	1251	47.16	3.3			
	35	1094	41.23	3.7			
	12	3063	115.46	0.93	R 97 RF97	4P 4P	175 190
	13	2890	108.95	0.99			
	14	2732	102.98	1.04			
	15	2586	97.49	1.10			
	16	2452	92.42	1.16			
	17	2268	85.50	1.26			
	18	2127	80.17	1.34			
	20	1882	70.96	1.51			
	22	1776	66.96	1.60			
	23	1679	63.29	1.70			
	24	1589	59.92	1.79			
	27	1430	53.91	1.99			
	31	1248	47.06	2.3			
	34	1119	42.19	2.5			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
4	38	1007	37.97	2.8	R 97	4P	175
	41	933	35.16	3.1	RF97	4P	190
	44	865	32.60	3.2			
	51	746	28.13	3.4			
	44	876	33.03	2.8	R 97	4P	175
	52	737	27.79	3.3	RF97	4P	190
	58	664	25.03	4.0			
	61	622	23.43	4.2			
	65	583	21.99	4.4			
	70	549	20.69	4.5			
	74	517	19.50	4.7			
	78	489	18.42	4.9			
	83	462	17.43	5.0			
	87	438	16.52	5.2			
	97	395	14.90	5.5			
	120	318	12.00	6.5			
	137	278	10.49	7.1			
	156	245	9.23	7.9			
	177	216	8.14	8.9			
	209	183	6.90	10			
	239	160	6.03	11			
	272	141	5.30	12			
	22	1735	65.39	0.85	R 87	4P	125
	23	1628	61.38	0.90	RF87	4P	132
	25	1517	57.20	0.97			
	27	1416	53.38	1.04			
	29	1323	49.88	1.11			
	31	1238	46.65	1.19			
	35	1086	40.92	1.36			
	38	994	37.47	1.48			
	44	864	32.58	1.70			
	51	755	28.48	1.89			
	53	718	27.06	2.1	R 87	4P	125
	57	673	25.36	2.2	RF87	4P	132
	60	632	23.84	2.3			
	69	557	21.00	2.6			
	73	522	19.69	2.6			
	83	462	17.43	2.9			
	88	436	16.45	3.0			
	93	412	15.55	3.1			
	98	390	14.72	3.2			
	103	370	13.95	3.4			
	109	351	13.24	3.5			
	118	324	12.23	3.6			
	147	261	9.83	4.3			
	154	247	9.33	4.6			
	180	212	8.01	5.2			
	208	183	6.91	5.5			
	224	171	6.43	5.7			
	242	158	5.96	5.8			
	280	136	5.14	6.3			
	38	1001	37.73	0.80	R 77	4P	95
	41	937	35.34	0.83	RF77	4P	101
	43	879	33.15	0.89			
	46	826	31.13	0.94			
	49	776	29.27	1.00			
	56	688	25.94	1.08			
	61	627	23.65	1.24	R 77	4P	95
	65	584	22.00	1.33	RF77	4P	101
	70	545	20.53	1.41			
	74	515	19.41	1.48			
	80	478	18.00	1.55			
	92	414	15.60	1.70			
	99	387	14.57	1.77			
	106	362	13.64	1.89			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N·m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
4	113	339	12.78	1.93	R 77	4P	95
	120	318	12.00	2.0	RF77	4P	101
	129	297	11.18	2.1			
	138	277	10.43	2.3			
	148	259	9.75	2.3			
	158	242	9.12	2.5			
	169	227	8.54	2.6			
	182	210	7.92	2.8			
	209	183	6.91	3.0			
	238	160	6.05	3.2			
	72	528	19.90	1.08	R 67	4P	85
	77	494	18.62	1.14	RF67	4P	88
	83	463	17.45	1.21			
	92	414	15.62	1.28			
	99	386	14.55	1.35			
	106	360	13.58	1.41			
	113	337	12.69	1.47			
	121	315	11.89	1.51			
	129	296	11.15	1.61			
	138	278	10.47	1.61			
	146	261	9.85	1.71			
	165	232	8.73	1.81			
	188	203	7.67	1.78			
	201	190	7.17	1.85			
	214	178	6.71	1.87			
	229	167	6.30	1.88			
	243	157	5.91	1.94			
	259	148	5.56	2.0			
	292	131	4.93	2.1			
	80	479	18.04	0.89	R157	4P	73
	85	448	16.87	0.96	RF57	4P	77
	91	420	15.82	1.00			
	95	404	15.23	1.02			
	102	375	14.15	1.09			
	109	350	13.18	1.14			
	117	326	12.30	1.19			
	125	305	11.50	1.26			
	134	286	10.77	1.30			
	142	268	10.11	1.36			
	152	252	9.49	1.40			
	161	237	8.92	1.51			
	182	210	7.91	1.61			
	193	198	7.45	1.68			
	230	166	6.25	1.92			
	246	156	5.86	1.95			
	262	146	5.51	2.0			
	278	137	5.18	2.1			
	333	115	4.32	2.3			
	140	273	10.30	0.80	R47	4P	65
	150	254	9.58	0.84	RF47	4P	65
	161	237	8.92	0.88			
	185	206	7.76	0.75			
	191	200	7.55	0.76			
	206	186	7.00	0.81			
	222	172	6.50	0.87			
	238	160	6.05	0.92			
	256	149	5.63	0.99			
	294	130	4.90	1.10			
	276	138	5.22	1.72	RX 87	4P	95
	313	122	4.60	2.3	RXF87	4P	100
	352	108	4.09	2.6			
	392	97	3.67	3.0			
	435	88	3.31	4.4			
	507	75	2.84	5.1			
	605	63	2.38	6.1			
	682	56	2.11	6.5			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
4	329	116	4.38	1.17	RX 77 RXF77	4P 4P	75 80
	381	100	3.78	1.45			
	436	88	3.30	1.98			
	495	77	2.91	2.6			
	558	68	2.58	3.0			
	623	61	2.31	3.2			
	696	55	2.07	3.5			
	770	50	1.87	3.6			
	894	43	1.61	3.8			
	1036	37	1.39	4.0			
	450	85	3.20	1.12	RX 67 RXF67	4P 4P	58 59
	554	69	2.60	1.63			
	634	60	2.27	2.1			
	814	47	1.77	2.5			
	917	42	1.57	2.6			
	1029	37	1.40	2.7			
	563	68	2.56	0.97	RX 47 RXF47	4P 4P	54 55
	655	58	2.20	1.12			
	754	51	1.91	1.29			
	862	44	1.67	1.48			
	986	39	1.46	1.67			
	1116	34	1.29	1.75			
5.5	2.2	20298	655	0.84	R167 R97 RF167 R97	4P 4P	1019 1029
	2.5	18167	586	0.94			
	2.9	15591	503	1.10			
	3.4	13228	427	1.29			
	3.9	11430	369	1.50			
	4.2	10516	339	1.63			
	4.8	9322	301	1.83			
	5.2	8576	277	1.99			
	3.1	14394	464	0.86	R 147 R87 RF147 R87	4P 4P	631 641
	3.4	13075	422	0.94			
	3.9	11440	369	1.08			
	4.3	10281	332	1.20			
	5.2	8604	278	1.44			
	5.9	7591	245	1.63			
	6.7	6643	214	1.86			
	7.7	5814	188	2.1			
	3.0	17303	237.19	0.99	R 167 RF167	8P 8P	935 945
	3.9	13339	182.85	1.28			
	4.7	11271	154.50	1.52			
	5.2	10168	139.38	1.68			
	5.9	8973	123.00	1.91			
	4.4	11871	162.72	1.04	R147 RF147	8P 8P	605 615
	5.0	10609	145.42	1.16			
	6.1	8667	118.81	1.42			
	6.8	7730	105.97	1.60			
	5.9	8903	162.72	1.39	R 147 RF147	8P 8P	560 570
	6.6	7957	145.42	1.55			
	8.1	6500	118.81	1.90			
	9.1	5798	105.97	2.1			
	10	5102	93.25	2.4			
	12	4527	82.74	2.7			
	5.7	9289	127.33	0.82	R 137 RF137	8P 8P	425 445
	6.3	8358	114.57	0.91			
	6.9	7565	103.70	1.00			
	8.2	6422	88.03	1.18			
	5.6	9391	171.64	0.81	R 137 RF137	6P 6P	380 400
	6.0	8804	160.91	0.86			
	6.7	7798	142.52	0.97			
	7.5	6967	127.33	1.09			
	8.4	6268	114.57	1.21			
	9.3	5674	103.70	1.34			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
5.5	6.4	8217	225.27	0.92	R 137	4P	364
	7.8	6698	183.63	1.13	RF137	4P	384
	8.4	6261	171.64	1.21			
	8.9	5869	160.91	1.29			
	9.5	5517	151.25	1.38			
	10	5198	142.52	1.46			
	11	4909	134.58	1.55			
	11	4644	127.33	1.64			
	13	4179	114.57	1.82			
	14	3782	103.70	2.0			
	15	3441	94.33	2.2			
	16	3211	88.03	2.4			
	17	3032	83.12	2.5			
	19	2719	74.54	2.8			
	22	2336	64.05	3.3			
	25	2125	58.26	3.6			
	28	1899	52.06	4.0			
	31	1671	45.80	4.5			
	33	1571	43.07	4.8			
	11	4681	128.34	0.87	R 107	4P	264
	12	4413	120.99	0.93	RF107	4P	269
	13	4169	114.28	0.98			
	13	3944	108.14	1.04			
	14	3738	102.48	1.09			
	16	3371	92.42	1.21			
	19	2795	76.63	1.46			
	20	2640	72.38	1.55			
	21	2498	68.49	1.64			
	22	2367	64.90	1.73			
	25	2135	58.54	1.91			
	26	1982	54.35	2.1			
	31	1720	47.16	2.4			
	35	1504	41.23	2.7			
	40	1322	36.25	3.1			
	17	3119	85.50	0.91	R 97	4P	194
	18	2924	80.17	0.97	RF97	4P	209
	20	2588	70.96	1.10			
	22	2442	66.96	1.17			
	23	2309	63.29	1.23			
	24	2185	59.92	1.30			
	27	1967	53.91	1.45			
	31	1717	47.06	1.66			
	34	1539	42.19	1.85			
	38	1385	37.97	2.1			
	41	1283	35.16	2.2			
	44	1189	32.60	2.3			
	51	1026	28.13	2.5			
	44	1205	33.03	2.0	R 97	4P	194
	52	1014	27.79	2.4	RF97	4P	209
	58	913	25.03	2.9			
	61	855	23.43	3.1			
	65	802	21.99	3.2			
	70	755	20.69	3.3			
	74	711	19.50	3.4			
	78	672	18.42	3.5			
	83	636	17.43	3.7			
	87	603	16.52	3.8			
	97	543	14.90	4.0			
	120	438	12.00	4.8			
	137	383	10.49	5.2			
	156	337	9.23	5.7			
	177	297	8.14	6.5			
	209	252	6.90	7.4			
	239	220	6.03	8.2			
	272	193	5.30	8.7			
	327	161	4.40	9.6			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
5.5	31	1702	46.65	0.87	R 87 RF87	4P 4P	144 151
	35	1493	40.92	0.99			
	38	1367	37.47	1.08			
	44	1188	32.58	1.24			
	51	1039	28.48	1.37			
	53	987	27.06	1.49	R 87 RF87	4P 4P	144 151
	57	925	25.36	1.59			
	60	869	23.84	1.69			
	69	766	21.00	1.86			
	73	718	19.69	1.90			
	83	636	17.43	2.1			
	88	600	16.45	2.2			
	93	567	15.55	2.2			
	98	537	14.72	2.3			
	103	509	13.95	2.4			
	109	483	13.24	2.5			
	118	446	12.23	2.6			
	147	358	9.83	3.1			
	154	340	9.33	3.4			
	180	292	8.01	3.8			
	208	252	6.91	4.0			
	224	234	6.43	4.1			
	242	217	5.96	4.2			
	280	188	5.14	4.6			
	74	708	19.41	1.07	R 77 RF77	4P 4P	114 120
	80	657	18.00	1.13			
	92	569	15.60	1.24			
	99	532	14.57	1.29			
	106	497	13.64	1.38			
	113	466	12.78	1.41			
	120	438	12.00	1.48			
	129	408	11.18	1.56			
	138	381	10.43	1.65			
	148	356	9.75	1.68			
	158	333	9.12	1.80			
	169	311	8.54	1.92			
	182	289	7.92	2.0			
	209	252	6.91	2.2			
	238	221	6.05	2.3			
	92	570	15.62	0.93	R 67 RF67	4P 4P	104 107
	99	531	14.55	0.98			
	106	495	13.58	1.03			
	113	463	12.69	1.07			
	121	434	11.89	1.10			
	129	407	11.15	1.17			
	138	382	10.47	1.17			
	146	359	9.85	1.24			
	165	318	8.73	1.31			
	188	280	7.67	1.29			
	201	261	7.17	1.34			
	214	245	6.71	1.36			
	229	230	6.30	1.36			
	243	216	5.91	1.41			
	259	203	5.56	1.45			
	292	180	4.93	1.53			
	95	556	15.23	0.80	R 57 RF57	4P 4P	92 96
	102	516	14.15	0.80			
	109	481	13.18	0.83			
	117	449	12.30	0.87			
	125	420	11.50	0.92			
	134	393	10.77	0.94			
	142	369	10.11	0.99			
	152	346	9.49	1.02			
	161	325	8.92	1.09			
	182	288	7.91	1.17			
	193	272	7.45	1.22			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
5.5	230	228	6.25	1.40	R 57	4P	92
	246	214	5.86	1.42	RF57	4P	96
	262	201	5.51	1.47			
	278	189	5.18	1.53			
	333	158	4.32	1.69			
	294	179	4.90	0.80	R 47/ RF47	4P	84
	218	241	6.62	1.81	RX 107	4P	159
	230	229	6.27	1.91	RXF107	4P	174
	254	207	5.67	2.1			
	306	172	4.71	3.8			
	341	154	4.22	5.1			
	379	139	3.80	5.7			
	459	115	3.14	6.9			
	502	105	2.87	7.5			
	545	96	2.64	8.2			
	618	85	2.33	9.3			
	254	207	5.67	1.93	SRX97	4P	139
	298	176	4.83	2.1	SRXF97	4P	149
	379	139	3.80	4.1			
	426	123	3.38	4.6			
	447	117	3.22	4.8			
	498	105	2.89	5.4			
	550	96	2.62	5.9			
	603	87	2.39	6.6			
	661	80	2.18	7.5			
	750	70	1.92	9.7			
	313	168	4.60	1.64	RX 87	4P	114
	352	149	4.09	1.91	RXF87	4P	119
	392	134	3.67	2.2			
	435	121	3.31	3.2			
	507	104	2.84	3.7			
	605	87	2.38	4.4			
	682	77	2.11	4.8			
	800	66	1.80	5.1			
	883	59	1.63	5.0			
	1029	51	1.40	5.4			
	436	120	3.30	1.44	RX 77	4P	94
	495	106	2.91	1.92	RXF77	4P	99
	558	94	2.58	2.2			
	623	84	2.31	2.3			
	696	76	2.07	2.5			
	770	68	1.87	2.6			
	894	59	1.61	2.8			
	1036	51	1.39	2.9			
	634	83	2.27	1.49	RX 67	4P	77
	814	65	1.77	1.85	RXF67	4P	78
	917	57	1.57	1.89			
	1029	51	1.40	1.93			
7.5	2.9	20969	503	0.82	R 167 R97	4P	1032
	3.4	17791	427	0.96	RF167 R97	4P	1042
	4.0	15372	369	1.11			
	4.3	14144	339	1.21			
	4.9	12538	301	1.36			
	5.3	11535	277	1.48			
	4.4	13827	332	0.89	R147 R87	4P	644
	5.3	11572	278	1.07	RF147 R87	4P	654
	6.0	10209	245	1.21			
	6.8	8934	214	1.38			
	7.8	7819	188	1.58			
	9.3	6561	157	1.88			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
7.5	3.0	23595	237.19	0.80	R 167	8P	952
	3.9	18190	182.85	0.94	RF167	8P	962
	4.7	15370	154.50	1.11			
	5.2	13865	139.38	1.23			
	5.9	12236	123.00	1.40			
	4.0	17696	237.19	0.97	R 167	6P	925
	5.3	13642	182.85	1.25	RF167	6P	1025
	6.2	11527	154.50	1.48			
	6.9	10399	139.38	1.64			
	7.8	9177	123.00	1.86			
	9.2	7821	104.83	2.2			
	10	7079	94.88	2.4			
	11	6336	84.92	2.7			
	13	5602	75.08	3.1			
	14	4966	66.56	3.4			
	4.4	16188	162.72	0.80	R147	8P	622
	5.0	14467	145.42	0.85	RF147	8P	632
	6.1	11819	118.81	1.04			
	6.8	10541	105.97	1.17			
	5.9	12141	162.72	1.02	R147	6P	595
	6.6	10850	145.42	1.14	RF147	6P	605
	8.1	8864	118.81	1.39			
	9.1	7906	105.97	1.56			
	10	6957	93.25	1.78			
	12	6173	82.74	2.0			
	8.0	9008	183.63	0.84	R137	4P	377
	8.5	8420	171.64	0.90	RF137	4P	397
	9.1	7894	160.91	0.96			
	9.7	7420	151.25	1.02			
	10	6992	142.52	1.09			
	11	6602	134.58	1.15			
	11	6246	127.33	1.22			
	13	5620	114.57	1.35			
	14	5087	103.70	1.49			
	15	4627	94.33	1.64			
	17	4318	88.03	1.76			
	18	4078	83.12	1.86			
	20	3657	74.54	2.1			
	23	3142	64.05	2.4			
	25	2858	58.26	2.7			
	28	2554	52.06	3.0			
	32	2247	45.80	3.4			
	34	2113	43.07	3.6			
	16	4534	92.42	0.90	R107	4P	277
	19	3759	76.63	1.09	RF107	4P	282
	20	3551	72.38	1.15			
	21	3660	68.49	1.22			
	22	3184	64.90	1.28			
	25	2872	58.54	1.42			
	27	2666	54.35	1.53			
	31	2314	47.16	1.77			
	35	2023	41.23	2.0			
	40	1778	36.25	2.3			
	46	1570	32.00	2.6			
	48	1477	30.10	2.8			
	46	1552	31.64	2.6	R107	4P	277
	49	1451	29.58	2.8	RF107	4P	282
	53	1360	27.73	3.0			
	56	1279	26.06	3.2			
	59	1205	24.56	3.4			
	63	1138	23.19	3.6			
	67	1076	21.94	3.8			
	70	1020	20.80	4.0			
	74	968	19.74	4.2			
	82	877	17.87	4.7			
	94	762	15.53	5.4			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N·m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
7.5	101	713	14.52	5.7	R 107	4P	277
	107	668	13.61	6.1	RF107	4P	282
	114	627	12.78	6.5			
	122	589	12.02	6.9			
	129	555	11.31	7.4			
	137	523	10.66	7.8			
	145	494	10.06	8.3			
	24	2939	59.92	0.97	R 97	4P	207
	27	2645	53.91	1.08	RF97	4P	222
	31	2309	47.06	1.23			
	35	2070	42.19	1.38			
	38	1863	37.97	1.53			
	42	1725	35.16	1.65			
	45	1600	32.60	1.72			
	52	1380	28.13	1.84			
	44	1620	33.03	1.50	R97	4P	207
	53	1363	27.79	1.78	RF97	4P	222
	58	1228	25.03	2.2			
	62	1149	23.43	2.3			
	66	1079	21.99	2.4			
	71	1015	20.69	2.4			
	75	957	19.50	2.5			
	79	904	18.42	2.6			
	84	855	17.43	2.7			
	88	810	16.52	2.8			
	98	731	14.90	3.0			
	122	589	12.00	3.5			
	139	515	10.49	3.9			
	158	453	9.23	4.3			
	179	400	8.14	4.8			
	212	339	6.90	5.5			
	242	296	6.03	6.1			
	275	260	5.30	6.5			
	331	216	4.40	7.2			
	39	1838	37.47	0.80	R 87	4P	157
	45	1598	32.58	0.92	RF87	4P	164
	51	1397	28.48	1.02			
	54	1328	27.06	1.11	R87	4P	157
	58	1244	25.36	1.18	RF87	4P	164
	61	1169	23.84	1.26			
	70	1030	21.00	1.38			
	74	966	19.69	1.42			
	84	855	17.43	1.54			
	89	807	16.45	1.61			
	94	763	15.55	1.67			
	99	722	14.72	1.74			
	105	684	13.95	1.82			
	110	650	13.24	1.87			
	119	600	12.23	1.95			
	149	482	9.83	2.3			
	157	458	9.33	2.5			
	182	393	8.01	2.8			
	211	339	6.91	3.0			
	227	315	6.43	3.1			
	245	292	5.96	3.1			
	284	252	5.14	3.4			
	75	952	19.41	0.80	R 77	4P	127
	81	883	18.00	0.84	RF77	4P	133
	94	765	15.60	0.92			
	100	715	14.57	0.96			
	107	669	13.64	1.02			
	114	627	12.78	1.05			
	122	589	12.00	1.10			
	131	549	11.18	1.16			
	140	512	10.43	1.22			
	150	478	9.75	1.25			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
7.5	160	447	9.12	1.34	R 77	4P	127
	171	419	8.54	1.43	RF77	4P	133
	184	389	7.92	1.49			
	211	339	6.91	1.63			
	241	297	6.05	1.73			
	115	623	12.69	0.80	R 67	4P	117
	123	583	11.89	0.81	RF67	4P	120
	131	547	11.15	0.87			
	139	514	10.47	0.87			
	148	483	9.85	0.92			
	167	428	8.73	0.98			
	190	376	7.67	0.96			
	204	352	7.17	1.00			
	217	329	6.71	1.01			
	232	309	6.30	1.01			
	247	290	5.91	1.05			
	263	273	5.56	1.08			
	296	242	4.93	1.14			
	185	388	7.91	0.87	R 57	4P	105
	196	366	7.45	0.91	RF57	4P	109
	234	307	6.25	1.04			
	249	288	5.86	1.06			
	265	270	5.51	1.09			
	282	254	5.18	1.14			
	338	212	4.32	1.25			
	221	325	6.62	1.35	RX 107	4P	172
	233	308	6.27	1.42	RX F107	4P	187
	257	278	5.67	1.55			
	310	231	4.71	2.9			
	346	207	4.22	3.8			
	384	186	3.80	4.2			
	465	154	3.14	5.1			
	509	141	2.87	5.6			
	553	130	2.64	6.1			
	627	114	2.33	6.9			
	257	278	5.67	1.43	RX97	4P	152
	302	237	4.83	1.58	RXF97	4P	162
	384	186	3.80	3.0			
	432	166	3.38	3.4			
	453	158	3.22	3.6			
	505	142	2.89	4.0			
	557	129	2.62	4.4			
	611	117	2.39	4.9			
	670	107	2.18	5.6			
	760	94	1.92	7.2			
	317	226	4.60	1.22	RX87	4P	127
	357	201	4.09	1.42	RXF87	4P	132
	398	180	3.67	1.61			
	441	162	3.31	2.4			
	514	139	2.84	2.8			
	613	117	2.38	3.3			
	692	104	2.11	3.5			
	811	88	1.80	3.8			
	896	80	1.63	3.7			
	1043	69	1.40	4.0			
	442	162	3.30	1.07	RX 77	4P	107
	502	143	2.91	1.43	RXF77	4P	112
	566	127	2.58	1.61			
	632	113	2.31	1.72			
	705	102	2.07	1.87			
	781	92	1.87	1.94			
	907	79	1.61	2.1			
	1050	68	1.39	2.2			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
7.5	643	111	2.27	1.11	RX 67 RXF67	4P 4P	90 91
	825	87	1.77	1.38			
	930	77	1.57	1.41			
	1043	69	1.40	1.44			
11	4.9	18047	295	0.95	R 167 R107 RF167 R107	4P 4P	1130 1140
	5.4	16384	268	1.04			
	6.4	13905	227	1.23			
	7.3	12186	199	1.40			
	8.8	10131	166	1.69			
	4.3	20744	339	0.82	R 167 R97 RF167 R97	4P 4P	1078 1080
	4.9	18389	301	0.93			
	5.3	16918	277	1.01			
	6.0	14973	245	0.82	R 147 R87 RF147 R87	4P 4P	682 692
	6.8	13103	214	0.94			
	7.8	11468	188	1.08			
	9.3	9623	157	1.28			
	5.3	20009	182.85	0.85	R 167 RF167	6P 6P	970 980
	6.2	16906	154.50	1.01			
	6.9	15252	139.38	1.12			
	7.8	13460	123.00	1.27			
	6.2	17066	237.19	1.00	R167 RF167	4P 4P	925 935
	8.0	13156	182.85	1.30			
	9.4	11117	154.50	1.54			
	10	10029	139.38	1.71			
	11	9365	130.16	1.83			
	12	8850	123.00	1.93			
	13	8378	116.44	2.0			
	14	7543	104.83	2.3			
	15	6826	94.88	2.5			
	16	6454	89.70	2.6			
	17	6110	84.92	2.8			
	18	5792	80.50	3.0			
	19	5402	75.08	3.2			
	22	4789	66.56	3.6			
	25	4275	59.41	4.0			
	26	4047	56.25	4.2			
	27	3836	53.32	4.5			
	33	3211	44.63	5.3			
	35	3036	42.19	5.6			
	37	2874	39.94	5.9			
	39	2724	37.86	6.3			
	6.6	15913	145.42	0.80	R147 RF147	6P 6P	640 650
	8.1	13001	118.81	0.95			
	9.1	11596	105.97	1.07			
	10	10204	93.25	1.21			
	12	9054	82.74	1.36			
	9.0	11708	162.72	1.05	R147 RF147	4P 4P	595 605
	10	10464	145.42	1.18			
	12	8970	124.66	1.38			
	12	8548	118.81	1.44			
	13	8158	113.39	1.51			
	14	7625	105.97	1.62			
	15	7144	99.29	1.73			
	16	6709	93.25	1.84			
	17	6314	87.76	1.96			
	18	5953	82.74	2.1			
	20	5318	73.92	2.3			
	21	4904	68.16	2.5			
	24	4367	60.69	2.8			
	28	3710	51.57	3.3			
	10	10255	142.52	0.80	R137 RF137	4P 4P	415 435
	11	9683	134.58	0.80			
	11	9162	127.33	0.83			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
11	12	8683	120.68	0.88	R 137	4P	415
	13	8243	114.57	0.92	RF137	4P	435
	14	7461	103.70	1.02			
	15	6787	94.33	1.12			
	17	6334	88.03	1.20			
	18	5981	83.12	1.27			
	20	5363	74.54	1.42			
	23	4608	64.05	1.65			
	25	4192	58.26	1.81			
	28	3746	52.06	2.0			
	30	3510	48.79	2.2			
	32	3296	45.80	2.3			
	34	3099	43.07	2.5			
	36	2918	40.55	2.6			
	38	2750	38.23	2.8			
	45	2318	32.21	3.3			
	22	4670	64.90	0.87	R107	4P	315
	25	4212	58.54	0.97	RF107	4P	320
	27	3910	54.35	1.04			
	31	3393	47.16	1.20			
	35	2967	41.23	1.38			
	40	2608	36.25	1.57			
	46	2302	32.00	1.77			
	48	2166	30.10	1.89			
	46	2277	31.64	1.79	R107	4P	315
	49	2128	29.58	1.92	RF107	4P	320
	53	1995	27.73	2.0			
	56	1875	26.06	2.2			
	59	1767	24.56	2.3			
	63	1669	23.19	2.4			
	67	1579	21.94	2.(3			
	70	1496	20.80	2.7			
	74	1420	19.74	2.9			
	82	1286	17.87	3.2			
	94	1117	15.53	3.7			
	101	1045	14.52	3.9			
	107	979	13.61	4.2			
	114	919	12.78	4.4			
	122	865	12.02	4.7			
	129	814	11.31	5.0			
	137	767	10.66	5.3			
	145	724	10.06	5.6			
	35	3036	42.19	0.94	R97	4P	245
	38	2732	37.97	1.04	RF97	4P	260
	42	2530	35.16	1.13			
	45	2346	32.60	1.17			
	52	2024	28.13	1.25			
	58	1801	25.03	1.49	R 97	4P	245
	62	168(3	23.43	1.57	RF97	4P	260
	66	1582	21.99	1.63			
	71	1489	20.69	1.67			
	75	1403	19.50	1.73			
	79	1326	18.42	1.79			
	84	1254	17.43	1.86			
	88	1189	16.52	1.92			
	98	1072	14.90	2.0			
	122	864	12.00	2.4			
	139	755	10.49	2.6			
	158	664	9.23	2.9			
	179	586	8.14	3.3			
	212	497	6.90	3.7			
	242	434	6.03	4.1			
	275	382	5.30	4.4			
	331	317	4.40	4.9			
	70	1511	21.00	0.94	R 87	4P	195
	74	1417	19.69	0.97	RF87	4P	202

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
11	84	1254	17.43	1.05	R 87	4P	195
	89	1183	16.45	1.10	RF87	4P	202
	94	1119	15.55	1.14			
	99	1059	14.72	1.18			
	105	1004	13.95	1.24			
	110	953	13.24	1.28			
	119	880	12.23	1.33			
	149	707	9.83	1.59			
	157	671	9.33	1.71			
	182	576	8.01	1.91			
	211	497	6.91	2.0			
	227	463	6.43	2.1			
	245	429	5.96	2.1			
	284	370	5.14	2.3			
	131	805	11.18	0.80	R 77	4P	165
	140	751	10.43	0.84	RF77	4P	171
	150	702	9.75	0.85			
	160	656	9.12	0.91			
	171	614	8.54	0.97			
	184	570	7.92	1.02			
	211	497	6.91	1.11			
	241	435	6.05	1.18			
	310	339	4.71	1.95	RX 107	4P	210
	346	304	4.22	2.6	RXF107	4P	225
	384	273	3.80	2.9			
	465	226	3.14	3.5			
	509	207	2.87	3.8			
	553	190	2.64	4.2			
	627	168	2.33	4.7			
	702	150	2.08	4.9			
	785	134	1.86	5.2			
	874	120	1.67	5.6			
	924	114	1.58	5.6			
	1028	102	1.42	6.0			
	302	348	4.83	1.08	RX97	4P	190
	384	273	3.80	2.1	RXF97	4P	200
	432	243	3.38	2.3			
	453	232	3.22	2.4			
	505	208	2.89	2.7			
	557	189	2.62	3.0			
	611	172	2.39	3.4			
	670	157	2.18	3.8			
	760	138	1.92	4.9			
	864	122	1.69	3.9			
	1098	96	1.33	4.5			
	441	238	3.31	1.62	RX 87	4P	165
	514	204	2.84	1.88	RXF87	4P	170
	613	171	2.38	2.2			
	692	152	2.11	2.4			
	811	130	1.80	2.6			
	896	117	1.63	2.6			
	1043	101	1.40	2.7			
	632	166	2.31	1.17	RX 77	4P	145
	705	149	2.07	1.28	RXF77	4P	150
	781	135	1.87	1.32			
	907	116	1.61	1.42			
	1050	100	1.39	1.47			
15	6.4	18962	227	0.90	R 167 R107	4P	1149
	7.3	16617	199	1.03	RF167 R107	4P	1159
	8.8	13815	166	1.24			
	6.3	22817	154.50	0.80	R 167	6P	1000
	7.0	20584	139.38	0.83	RF167	6P	1010
	7.9	18165	123.00	0.94			
	9.3	15481	104.83	1.10			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
15	6.2	23272	237.19	0.80	R 167 RF167	4P 4P	944 954
	8.0	17941	182.85	0.95			
	9.4	15159	154.50	1.13			
	10	13675	139.38	1.25			
	11	12771	130.16	1.34			
	12	12068	123.00	1.42			
	13	11424	116.44	1.50			
	14	10285	104.83	1.66			
	15	9309	94.88	1.84			
	16	8801	89.70	1.94			
	17	8332	84.92	2.1			
	18	7898	80.50	2.2			
	19	7367	75.08	2.3			
	22	6531	66.56	2.6			
	25	5829	59.41	2.9			
	26	5519	56.25	3.1			
	27	5231	53.32	3.3			
	33	4378	44.63	3.9			
	35	4140	42.19	4.1			
	37	3919	39.94	4.4			
	39	3715	37.86	4.6			
	9.2	15649	105.97	0.80	R 147 RF147	6P 6P	670 680
	10	13771	93.25	0.90			
	12	12219	82.74	1.01			
	13	10916	73.92	1.13			
	14	10065	68.16	1.23			
	9.0	15966	162.72	0.80	R147 RF147	4P 4P	614 624
	10	14268	145.42	0.87			
	12	12232	124.66	1.01			
	12	11657	118.81	1.06			
	13	11125	113.39	1.11			
	14	10397	105.97	1.19			
	15	9742	99.29	1.27			
	16	9149	93.25	1.35			
	17	8610	87.76	1.43			
	18	8118	82.74	1.52			
	20	7252	73.92	1.70			
	21	6687	68.16	1.85			
	24	5955	60.69	2.1			
	28	5060	51.57	2.4			
	30	4804	48.96	2.6			
	32	4490	45.76	2.8			
	34	4203	42.84	2.9			
	36	3941	40.16	3.1			
	14	10174	103.70	0.80	R137 RF137	4P 4P	434 454
	15	9255	94.33	0.82			
	17	8637	88.03	0.88			
	18	8156	83.12	0.93			
	20	7313	74.54	1.04			
	23	6284	64.05	1.21			
	25	5716	58.26	1.33			
	28	5108	52.06	1.49			
	32	4494	45.80	1.69			
	34	4226	43.07	1.80			
	38	3751	38.23	2.0			
	45	3161	32.21	2.4			
	50	2883	29.38	2.6			
	53	2682	27.33	2.8			
	31	4627	47.16	0.88	R 107 RF107	4P 4P	334 339
	35	4045	41.23	1.01			
	40	3556	36.25	1.15			
	46	3140	32.00	1.30			
	48	2954	30.10	1.38			
	46	3105	31.64	1.32			
	49	2902	29.58	1.41			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
15	53	2721	27.73	1.50	R 107	4P	334
	56	2557	26.06	1.60	RF107	4P	339
	59	2410	24.56	1.70			
	63	2275	23.19	1.80			
	67	2153	21.94	1.90			
	70	2040	20.80	2.0			
	74	1937	19.74	2.1			
	82	1753	17.87	2.3			
	94	1523	15.53	2.7			
	101	1425	14.52	2.9			
	107	1336	13.61	3.1			
	114	1254	12.78	3.3			
	122	1179	12.02	3.5			
	129	1110	11.31	3.7			
	137	1046	10.66	3.9			
	145	987	10.06	4.1			
	35		42.19	0.80	R 97	4P	264
	38		37.97	0.80	RF97	4P	279
	42		35.16	0.83			
	45		32.60	0.86			
	52		28.13	0.92			
	58	2456	25.03	1.09	R97	4P	264
	62	2299	23.43	1.15	RF97	4P	279
	66	2158	21.99	1.20			
	71	2030	20.69	1.22			
	75	1914	19.50	1.27			
	79	1808	18.42	1.31			
	84	1710	17.43	1.36			
	88	1621	16.52	1.41			
	98	1462	14.90	1.49			
	122	1178	12.00	1.77			
	139	1030	10.49	1.93			
	158	905	9.23	2.1			
	179	799	8.14	2.4			
	212	677	6.90	2.7			
	242	592	6.03	3.0			
	275	520	5.30	3.2			
	331	432	4.40	3.6			
	70		21.00	0.80	R87	4P	214
	74		19.69	0.80	RF87	4P	221
	84		17.43	0.80			
	89		16.45	0.80			
	94		15.55	0.83			
	99		14.72	0.87			
	105		13.95	0.91			
	110		13.24	0.94			
	119		12.23	0.97			
	149		9.83	1.16			
	157		9.33	1.26			
	182		8.01	1.40			
	211		6.91	1.50			
	227		6.43	1.54			
	245		5.96	1.56			
	284		5.14	1.71			
	310	462	4.71	1.43	RX 107	4P	229
	346	414	4.22	1.90	RXF107	4P	244
	384	373	3.80	2.1			
	465	308	3.14	2.6			
	509	282	2.87	2.8			
	553	259	2.64	3.0			
	627	229	2.33	3.4			
	702	204	2.08	3.6			
	785	182	1.86	3.8			
	874	164	1.67	4.1			
	924	155	1.58	4.1			
	1028	139	1.42	4.4			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
15	302	474	4.83	0.80	RX 97 RXF9 7	4P 4P	209 219
	384	373	3.80	1.52			
	432	332	3.38	1.70			
	453	316	3.22	1.79			
	505	284	2.89	1.99			
	557	257	2.62	2.2			
	611	234	2.39	2.5			
	670	214	2.18	2.8			
	760	188	1.92	3.6			
	864	166	1.69	2.9			
	1098	130	1.33	3.3			
	514	279	2.84	1.38	RX87 RXF87	4P 4P	184 189
	613	234	2.38	1.65			
	692	207	2.11	1.77			
	811	177	1.80	1.91			
	896	160	1.63	1.87			
	1043	137	1.40	2.01			
18.5	8.0	21976	182.85	0.80	R167 RF167	4P 4P	989 999
	9.5	18569	154.50	0.92			
	11	16752	139.38	1.02			
	11	15643	130.16	1.09			
	12	14783	123.00	1.16			
	13	13994	116.44	1.22			
	14	12599	104.83	1.36			
	15	11403	94.88	1.50			
	16	10781	89.70	1.59			
	17	10207	84.92	1.68			
	18	9675	80.50	1.77			
	20	9024	75.08	1.90			
	22	8000	66.56	2.1			
	25	7141	59.41	2.4			
	26	6760	56.25	2.5			
	28	6408	53.32	2.7			
	33	5363	44.63	3.2			
	35	5071	42.19	3.4			
	37	4801	39.94	3.6			
	39	4551	37.86	3.8			
	12	14279	118.81	0.86	R147 RF147	4P 4P	659 669
	13	13628	113.39	0.91			
	14	12736	105.97	0.97			
	15	11933	99.29	1.03			
	16	11207	93.25	1.10			
	17	10547	87.76	1.17			
	18	9944	82.74	1.24			
	20	8884	73.92	1.39			
	22	8101	68.16	1.51			
	24	7294	60.69	1.69			
	29	6198	51.57	1.99			
	30	5884	48.96	2.1			
	32	5500	45.76	2.2			
	34	5149	42.84	2.4			
	37	4827	40.16	2.6			
	18	9990	83.12	0.80	R 137 RF137	4P 4P	479 499
	20	8959	74.54	0.85			
	23	7698	64.05	0.99			
	25	7002	58.26	1.09			
	28	6257	52.06	1.21			
	32	5505	45.80	1.38			
	34	5176	43.07	1.47			
	38	4594	38.23	1.65			
	46	3872	32.21	1.96			
	50	3532	29.38	2.2			
	54	3285	27.33	2.2			
	36	4955	41.23	0.82	R 107 RF107	4P 4P	379 384
	41	4356	36.25	0.94			
	46	3846	32.00	1.06			
	49	3618	30.10	1.13			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
18.5	46	3803	31.64	1.07	R107	4P	379
	50	3555	29.58	1.15	RF107	4P	384
	53	3332	23.73	1.23			
	56	3133	26.06	1.30			
	60	2952	24.56	1.38			
	63	2787	23.19	1.47			
	67	2637	21.94	1.55			
	71	2499	20.80	1.63			
	74	2373	19.74	1.72			
	82	2148	17.87	1.90			
	95	1866	15.53	2.2			
	101	1746	14.52	2.3			
	108	1636	13.61	2.5			
	115	1536	12.78	2.7			
	122	1444	12.02	2.8			
	130	1360	11.31	3.0			
	138	1282	10.66	3.2			
	146	1210	10.06	3.4			
	164	1080	8.99	3.8			
	185	954	7.94	3.0			
	223	793	6.60	3.6			
	236	748	6.22	3.8			
	250	706	5.87	4.0			
	280	630	5.24	4.4			
	71	2486	20.69	1.00	R 97	4P	309
	75	2344	19.50	1.04	RF97	4P	324
	80	2214	18.42	1 .07			
	84	2095	17.43	1.11			
	89	1985	16.52	1.15			
	99	1791	14.90	1.22			
	122	1443	12.00	1.44			
	140	1261	10.49	1.57			
	159	1109	9.23	1.74			
	180	979	8.14	1.97			
	213	829	6.90	2.2			
	244	725	6.03	2.5			
	277	637	5.30	2.7			
	334	529	4.40	2.9			
	111	1592	13.24	0.80	R 87	4P	259
	120	1470	12.23	0.80	RF87	4P	266
	150	1181	9.83	0.95			
	158	1121	9.33	1.03			
	184	962	8.01	1.14			
	213	830	6.91	1.22			
	229	773	6.43	1.25			
	247	716	5.96	1.27			
	286	618	5.14	1.40			
	348	507	4.22	1.55	RX 107	4P	274
	387	457	3.80	1.73	RXF107	4P	289
	468	377	3.14	2.1			
	512	345	2.87	2.3			
	557	317	2.64	2.5			
	631	280	2.33	2.8			
	707	250	2.08	2.9			
	790	224	1.86	3.1			
	880	201	1.67	3.3			
	930	190	1.58	3.4			
	1035	171	1.42	3.6			
	435	406	3.38	1.39	RX 97	4P	254
	457	387	3.22	1.46	RXF9 7	4P	264
	509	347	2.89	1.63			
	561	315	2.62	1.80			
	615	287	2.39	2.0			
	674	262	2.18	2.3			
	766	231	1.92	2.9			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
18.5	870	203	1.69	2.4	RX 97	4P	254
	1105	160	1.33	2.7	RXF97	4P	264
	518	341	2.84	1.13	RX 87	4P	229
	618	286	2.38	1.35	RXF87	4P	234
	697	254	2.11	1.44			
	817	216	1.80	1.56			
	902	196	1.63	1.53			
	1050	168	1.40	1.64			
22	9.5	22082	154.50	0.80	R 167	4P	1000
	11	19921	139.38	0.86	RF167	4P	1010
	11	18603	130.16	0.92			
	12	17580	123.00	0.97			
	13	16642	116.44	1.03			
	14	14982	104.38	1.14			
	15	13560	94.88	1.26			
	16	12820	89.70	1.33			
	17	12138	84.92	1.41			
	18	11505	80.50	1.49			
	20	10731	75.08	1.59			
	22	9514	66.56	1.80			
	25	8491	59.41	2.0			
	26	8039	56.25	2.1			
	28	7621	53.32	2.2			
	33	6378	44.63	2.7			
	35	6030	42.19	2.8			
	37	5709	39.94	3.0			
	39	5412	37.86	3.2			
	14	15145	105.97	0.82	SR 147	4P	670
	15	14191	99.29	0.87	SRF147	4P	680
	16	13327	93.25	0.93			
	17	12543	87.76	0.98			
	18	11826	82.74	1.04			
	20	10564	73.92	1.17			
	22	9741	68.16	1.27			
	24	8674	60.69	1.42			
	29	7370	51.57	1.68			
	30	6998	48.96	1.76			
	32	6541	45.76	1.89			
	34	6123	42.84	2.0			
	37	5740	40.16	2.2			
	41	5063	35.43	2.4			
	44	4762	33.32	2.6			
	40	5214	36.48	2.4			
	43	4873	34.10	2.5			
	46	4562	31.92	2.7			
	49	4277	29.92	2.9			
	56	3773	26.40	3.1			
	59	3548	24.83	3.2			
	23	9154	64.05	0.83	R137	4P	490
	25	8327	58.26	0.91	RF137	4P	510
	28	7441	52.06	1.02			
	32	6546	45.80	1.16			
	34	6155	43.07	1.23			
	38	5463	38.23	1.39			
	46	4604	32.21	1.65			
	50	4200	29.38	1.81			
	54	3906	27.33	1.87			
	49	4271	29.88	1.78	R137	4P	490
	61	3465	24.24	2.2	RF137	4P	510
	64	3302	23.10	2.3			
	67	3152	22.05	2.4			
	76	2760	19.31	2.8			
	81	2592	18.13	2.9			
	86	2439	17.07	3.1			
	91	2300	16.09	3.3			
	97	2172	15.20	3.5			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
22	102	2054	14.37	3.7	R 137	4P	490
	112	1878	13.14	4.0	RF137	4P	510
	120	1752	12.26	4.3			
	128	1638	11.46	4.6			
	137	1533	10.73	5.0			
	146	1437	10.06	5.3			
	41	5180	36.25	0.80	R107	4P	379
	46	4574	32.00	0.89	RF107	4P	384
	49	4303	30.10	0.95			
	46	4522	31.64	0.90	R 107	4P	379
	50	4227	29.85	0.97	RF107	4P	384
	53	3963	27.73	1.03			
	56	3725	26.06	1.10			
	60	3510	24.56	1.16			
	63	3314	23.19	1.23			
	67	3136	21.94	1.30			
	71	2972	20.80	1.37			
	74	2822	19.74	1.45			
	82	2554	17.87	1.60			
	95	2219	15.53	1.84			
	101	2076	14.52	1.97			
	108	1945	13.61	2.1			
	115	1826	12.78	2.2			
	122	1717	12.02	2.4			
	130	1617	11.31	2.5			
	138	1524	10.66	2.7			
	146	1438	10.06	2.8			
	164	1285	8.99	3.2			
	185	1135	7.94	2.5			
	223	943	6.60	3.0			
	236	889	6.22	3.2			
	250	839	5.87	3.4			
	280	749	5.24	3.7			
	71	2957	20.69	0.84	R97	4P	309
	75	2788	19.50	0.87	RF97	4P	324
	80	2633	18.42	0.90			
	84	2491	17.43	0.93			
	89	2361	16.52	0.97			
	99	2129	14.90	1.03			
	122	1716	12.00	1.21			
	140	1500	10.49	1.32			
	159	1319	9.23	1.46			
	180	1164	8.14	1.66			
	213	986	6.90	1.88			
	244	862	6.03	2.1			
	277	758	5.30	2.2			
	334	630	4.40	2.5			
	150	1405	9.83	0.80	R 87	4P	259
	158	1333	9.33	0.86	RF87	4P	266
	184	1145	8.01	0.96			
	213	987	6.91	1.03			
	229	919	6.43	1.05			
	247	852	5.96	1.07			
	286	735	5.14	1.18			
	348	603	4.22	1.31	RX 107	4P	274
	387	543	3.80	1.45	RXF 107	4P	289
	468	449	3.14	1.76			
	512	410	2.87	1.92			
	557	377	2.64	2.1			
	631	333	2.33	2.4			
	707	297	2.08	2.4			
	790	266	1.86	2.6			
	880	239	1.67	2.8			
	930	226	1.58	2.8			
	1035	203	1.42	3.0			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
22	435	483	3.38	1.17	RX 97 RXF97	4P 4P	254 264
	457	460	3.22	1.23			
	509	413	2.89	1.37			
	561	374	2.62	1.51			
	615	342	2.39	1.70			
	674	312	2.18	1.91			
	766	274	1.92	2.5			
	870	242	1.69	1.99			
	1105	190	1.33	2.3			
	518	406	2.84	0.95	RX87 RXF87	4P 4P	229 234
	618	340	2.38	1.13			
	697	302	2.11	1.21			
	817	257	1.80	1.31			
	902	233	1.63	1.28			
	1050	200	1.40	1.38			
30	14	20431	104.83	0.84	R 167 RF167	4P 4P	1070 1080
	15	18491	94.88	0.92			
	16	17482	89.70	0.98			
	17	16551	84.92	1.03			
	18	15689	80.50	1.09			
	20	14633	75.08	1.17			
	22	12973	66.56	1.32			
	25	11579	59.41	1.48			
	26	10963	56.25	1.56			
	28	10392	53.32	1.65			
	33	8697	44.63	1.97			
	35	8223	42.19	2.1			
	37	7785	39.94	2.2			
	39	7380	37.86	2.3			
	42	6800	34.89	2.5			
	45	6325	32.45	2.7			
	49	5894	30.24	2.9			
	52	5500	28.22	3.1			
	56	5139	26.37	3.3			
	60	4807	24.67	3.6			
	64	4501	23.09	3.8			
	18	16126	82.74	0.80	R147 RF147	4P 4P	740 750
	20	14406	73.92	0.86			
	22	13283	68.16	0.93			
	24	11829	60.69	1.04			
	29	10050	51.57	1.23			
	30	9542	48.96	1.29			
	32	8919	45.76	1.38			
	34	8350	42.84	1.48			
	37	7828	40.16	1.58			
	41	6904	35.43	1.79			
	44	6494	33.32	1.90			
	40	7110	36.48	1.74			
	43	61345	34.10	1.86			
	46	6221	31.92	1.99			
	49	5832	29.92	2.1			
	56	5144	26.40	2.3			
	59	4839	24.83	2.3			
	74	3877	19.89	2.9	R 147 RF147	4P 4P	740 750
	78	3664	18.80	2.9			
	83	3468	17.80	2.9			
	92	3122	16.02	4.0			
	107	2672	13.71	4.5			
	113	2530	12.98	4.9			
	119	2398	12.30	5.2			
	28	10146	52.06	0.80	R 137 RF137	4P 4P	560 580
	32	8927	45.80	0.85			
	34	8394	43.07	0.91			
	38	7450	38.23	1.02			
	46	6279	32.21	1.21			
	50	5727	29.38	1.33			
	54	5327	27.33	1.37			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
30	49	5824	29.88	1.30	R 137	4P	560
	61	4725	24.24	1.61	RF137	4P	580
	64	4503	23.10	1.69			
	67	4298	22.05	1.77			
	76	3763	19.31	2.0			
	81	3534	18.13	2.2			
	86	3326	17.07	2.3			
	91	3136	16.09	2.4			
	97	2962	15.20	2.6			
	102	2802	14.37	2.7			
	112	2561	13.14	3.0			
	120	2389	12.26	3.2			
	128	2233	11.46	3.4			
	137	2091	10.73	3.6			
	146	1960	10.06	3.9			
	166	1729	8.87	4.3			
	176	1626	8.34	4.6			
	191	1503	7.71	3.2			
	232	1233	6.33	3.9			
	280	1023	5.25	4.3			
	63	4520	23.19	0.90	R 107	4P	460
	67	4276	21.94	0.96	RF107	4P	465
	71	4053	20.80	1.01			
	74	3848	19.74	1.06			
	82	3483	17.87	1.17			
	95	3026	15.53	1.35			
	101	2831	14.52	1.44			
	108	2653	13.61	1.54			
	115	2491	12.78	1.64			
	122	2342	12.02	1.74			
	130	2205	11.31	1.85			
	138	2078	10.66	1.97			
	146	1961	10.06	2.1			
	164	1752	8.99	2.3			
	185	1548	7.94	1.82			
	223	1286	6.60	2.2			
	236	1213	6.22	2.3			
	250	1144	5.87	2.5			
	280	1022	5.24	2.7			
	99	2904	14.90	0.80	R97	4P	390
	122	2340	12.00	0.89	RF97	4P	405
	140	2045	10.49	0.97			
	159	1798	9.23	1.07			
	180	1587	8.14	1.21			
	213	1345	6.90	1.38			
	244	1176	6.03	1.53			
	277	1034	5.30	1.64			
	334	858	4.40	1.80			
	468	612	3.14	1.29	RX107	4P	355
	512	559	2.87	1.41	RXF107	4P	370
	557	515	2.64	1.53			
	631	454	2.33	1.74			
	707	405	2.08	1.79			
	790	363	1.86	1.93			
	880	325	1.67	2.1			
	930	308	1.58	2.1			
	1035	277	1.42	2.2			
	561	511	2.62	1.11	R97	4P	355
	615	466	2.39	1.24	RF97	4P	345
	674	425	2.18	1.40			
	766	374	1.92	1.81			
	870	329	1.69	1.46			
	1105	259	1.33	1.67			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
37	16	22728	94.88	0.80	R167 RF167	4P 4P	1090 1100
	16	21488	89.70	0.80			
	17	20344	84.92	0.84			
	18	19285	80.50	0.89			
	20	17986	75.08	0.95			
	22	15946	66.56	1.07			
	25	14233	59.41	1.20			
	26	13475	56.25	1.27			
	28	12773	53.32	1.34			
	33	10690	44.63	1.60			
	35	10107	42.19	1.69			
	37	9569	39.94	1.79			
	39	9071	37.86	1.89			
	42	8358	34.89	2.0			
	45	7775	32.45	2.2			
	49	7245	30.24	2.4			
	52	6761	28.22	2.5			
	56	6317	26.37	2.7			
	60	5909	24.67	2.9			
	64	5532	23.09	3.1			
	47	7513	31.36	1.26	R 167 RF167	4P 4P	1090 1100
	59	6011	25.09	2.2			
	67	5259	21.95	2.3			
	76	4645	19.39	3.3			
	86	4132	17.25	3.4			
	101	3506	14.64	4.9			
	125	2825	11.79	5.7			
	22	16327	68.16	0.80	R 147 RF147	4P 4P	760 770
	24	14539	60.69	0.85			
	29	12354	51.57	1.00			
	30	11729	48.96	1.05			
	32	10963	45.76	1.13			
	34	10263	42.84	1.20			
	37	9622	40.16	1.28			
	42	8487	35.43	1.46			
	44	7982	33.32	1.55			
	40	8739	36.48	1.41			
	43	8168	34.10	1.51			
	46	7647	31.92	1.62			
	49	7169	29.92	1.72			
	56	6323	26.40	1.83			
	59	5947	24.83	1.90			
	74	4765	19.89	2.4	R 147 RF147	4P 4P	760 770
	78	4503	18.80	2.4			
	83	4263	17.80	2.3			
	92	3838	16.02	3.2			
	108	3284	13.71	3.6			
	114	3109	12.98	4.0			
	120	2947	12.30	4.2			
	39	9157	38.23	0.83	R137 RF137	4P 4P	580 600
	46	7717	32.21	0.98			
	50	7039	29.38	1.08			
	54	6547	27.33	1.11			
	49	7158	29.88	1.06	R 137 RF137	4P 4P	580 600
	61	5808	24.24	1.31			
	64	5535	23.10	1.37			
	67	5282	22.05	1.44			
	76	4626	19.31	1.64			
	81	4344	18.13	1.75			
	86	4088	17.07	1.86			
	92	3855	16.09	1.97			
	97	3641	15.20	2.1			
	103	3444	14.37	2.2			
	112	3148	13.14	2.4			
	120	2937	12.26	2.6			
	129	2745	11.46	2.8			
	138	2570	10.73	3.0			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
37	147	2409	10.06	3.2	R137 RF137	4P 4P	580 600
	166	2125	8.87	3.5			
	177	1999	8.34	3.7			
	191	1848	7.71	2.6			
	233	1516	6.33	3.2			
	281	1258	5.25	3.5			
	95	3720	15.53	1.10	R 107 RF107	4P 4P	480 485
	102	3479	14.52	1.17			
	108	3261	13.61	1.25			
	115	3061	12.78	1.33			
	123	2878	12.02	1.42			
	130	2710	11.31	1.51			
	138	2555	10.66	1.60			
	147	2411	10.06	1.69			
	164	2153	8.99	1.90			
	186	1902	7.94	1.48			
	223	1581	6.60	1.78			
	237	1490	6.22	1.89			
	251	1407	5.87	2.0			
	281	1256	5.24	2.2			
	470	752	3.14	1.05	RX107 RXF107	4P 4P	375 390
	514	688	2.87	1.15			
	559	632	2.64	1.25			
	633	558	2.33	1.41			
	709	498	2.08	1.46			
	793	446	1.86	1.57			
	883	400	1.67	1.67			
	934	379	1.58	1.68			
	1039	340	1.42	1.80			
45	20	21875	75.08	0.80	R 167 RF167	4P 4P	1145 1155
	22	19394	66.56	0.88			
	25	17310	59.41	0.99			
	26	16388	56.25	1.04			
	28	15535	53.32	1.10			
	33	13002	44.63	1.32			
	35	12293	42.19	1.39			
	37	11638	39.94	1.47			
	39	11032	37.86	1.55			
	42	10165	34.89	1.68			
	45	9456	32.45	1.81			
	49	8811	30.24	1.94			
	52	8222	28.22	2.1			
	56	7683	26.37	2.2			
	60	7186	24.67	2.4			
	64	6728	23.09	2.5			
	47	9138	31.36	1.04	R167 RF167	4P 4P	1145 1155
	59	7310	25.09	1.82			
	67	6397	21.95	1.93			
	76	5649	19.39	2.7			
	86	5026	17.25	2.8			
	101	4264	14.64	4.0			
	125	3436	11.79	4.7			
	29	15025	51.57	0.82	R 147 RF147	4P 4P	815 825
	30	14265	48.96	0.87			
	32	13333	45.76	0.93			
	34	12482	42.84	0.99			
	37	11702	40.16	1.06			
	42	10322	35.43	1.20			
	44	9708	33.32	1.27			
	40	10629	36.48	1.16			
	43	9934	34.10	1.24			
	46	9300	31.92	1.33			
	49	8719	29.92	1.42			
	56	7690	26.40	1.51			
	59	7233	24.83	1.56			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
45	74	5796	19.89	1.97	R 147	4P	815
	78	5477	18.80	1.94	RF147	4P	825
	83	5185	17.80	1.92			
	92	4668	16.02	2.6			
	108	3994	13.71	3.0			
	114	3782	12.98	3.3			
	120	3585	12.30	3.4			
	150	2863	9.83	4.3			
	161	2672	9.17	4.6			
	172	2496	8.57	4.9			
	184	2335	8.01	5.3			
	197	2186	7.50	3.8			
	188	2289	7.86	3.6			
	201	2133	7.32	3.9			
	216	1991	6.83	4.1			
	231	1860	6.38	4.4			
	247	1740	5.97	4.7			
	264	1629	5.59	5.1			
	46	9386	32.21	0.81	R 137	4P	625
	50	8561	29.38	0.89	RF137	4P	655
	54	7963	27.33	0.92			
	49	8706	29.88	0.87			
	61	7064	24.24	1.08			
	64	6732	23.10	1.13			
	67	6425	22.05	1.18			
	76	5626	19.31	1.35			
	81	5284	18.13	1.44			
	86	4972	17.07	1.53			
	92	4688	16.09	1.62			
	97	4428	15.20	1.72			
	103	4188	14.37	1.81			
	112	3829	13.14	1.99			
	120	3572	12.26	2.1			
	129	3339	11.46	2.3			
	138	3125	10.73	2.4			
	147	2930	10.06	2.6			
	166	2585	8.87	2.9			
	177	2431	8.34	3.0			
	191	2248	7.71	2.2			
	233	1844	6.33	2.6			
	281	1530	5.25	2.9			
	95	4524	15.53	0.90	R107	4P	535
	102	4232	14.52	0.97	RF107	4P	540
	108	3966	13.61	1.03			
	115	3723	12.78	1.10			
	123	3501	12.02	1.17			
	130	3296	11.31	1.24			
	138	3107	10.66	1.31			
	147	2932	10.06	1.39			
	164	2619	8.99	1.56			
	186	2314	7.94	1.22			
	223	1923	6.60	1.47			
	237	1813	6.22	1.56			
	251	1711	5.87	1.65			
	281	1528	5.24	1.80			
	470	915	3.14	0.86	RX107	4P	430
	514	836	2.87	0.94	RXF107	4P	445
	559	769	2.64	1.03			
	633	679	2.33	1.16			
	709	606	2.08	1.20			
	793	542	1.86	1.29			
	883	487	1.67	1.38			
	934	460	1.58	1.38			
	1039	414	1.42	1.48			
55	25	21085	59.41	0.81	R 167	4P	1260
	26	19962	56.25	0.86	RF167	4P	1270

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N·m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
55	28	18923	53.32	0.90	R167	4P	1260
	33	15837	44.63	1.08	RF167	4P	1270
	35	14973	42.19	1.14			
	37	14176	39.94	1.21			
	39	13438	37.86	1.27			
	42	12382	34.89	1.38			
	46	11518	32.45	1.48			
	49	10733	30.24	1.59			
	52	10016	28.22	1.71			
	56	9358	26.37	1.83			
	60	8754	24.67	1.95			
	64	8196	23.09	2.1			
	59	8905	25.09	1.49	R 167	4P	1260
	67	7792	21.95	1.59	RF167	4P	1270
	76	6881	19.39	2.2			
	86	6122	17.25	2.3			
	101	5194	14.64	3.3			
	126	4185	11.79	3.9			
	32	18241	45.76	0.80	R 147	4P	930
	35	15204	42.84	0.81	RF147	4P	940
	37	14254	40.16	0.87			
	42	12573	35.43	0.98			
	44	11825	33.32	1.04			
	41	12947	36.48	0.95			
	43	12101	34.10	1.02			
	46	11328	31.92	1.09			
	49	10620	29.92	1.16			
	56	9368	26.40	1.24			
	60	8811	24.83	1.28			
	74	7060	19.89	1.61	R 147	4P	930
	79	6672	18.80	1.59	RF147	4P	940
	83	6316	17.80	1.58			
	92	5686	16.02	2.2			
	108	4865	13.71	2.5			
	114	4606	12.98	2.7			
	120	4366	12.30	2.8			
	151	3487	9.83	3.5			
	161	3254	9.17	3.8			
	173	3041	8.57	4.1			
	185	2844	8.01	4.3			
	197	2663	7.50	3.1			
	188	2788	7.86	3.0			
	202	2598	7.32	3.2			
	217	2425	6.83	3.4			
	232	2266	6.38	3.6			
	248	2119	5.97	3.9			
	265	1984	5.59	4.2			
	77	6853	19.31	1.11	R137	4P	750
	82	6436	18.13	1.18	RF137	4P	770
	87	6057	17.07	1.25			
	92	5711	16.09	1.33			
	97	5393	15.20	1.41			
	103	5102	14.37	1.49			
	113	4664	13.14	1.63			
	121	4351	12.26	1.75			
	129	4067	11.46	1.87			
	138	3807	10.73	2.0			
	147	3569	10.06	2.1			
	167	3148	8.87	2.4			
	177	2961	8.34	2.5			
	192	2738	7.71	1.8			
	234	2246	6.33	2.2			
	282	1863	5.25	2.3			
75	33	21596	44.63	0.80	R 167	4P	1344
	35	20418	42.19	0.84	RF167	4P	1354
	37	19331	39.94	0.88			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
75	39	18324	37.86	0.93	R167	4P	1344
	42	16884	34.89	1.01	RF167	4P	1354
	46	15706	32.45	1.09			
	49	14636	30.24	1.17			
	52	13658	28.22	1.25			
	56	12762	26.37	1.34			
	60	11937	24.67	1.43			
	64	11176	23.09	1.53			
	59	12143	25.09	1.10	R167	4P	1344
	67	10625	21.95	1.16	RF167	4P	1354
	76	9383	19.39	1.62			
	86	8348	17.25	1.71			
	101	7083	14.64	2.4			
	126	5707	11.79	2.8			
	142	5060	10.45	3.2			
	49	14482	29.92	0.85	R147	4P	1014
	56	12774	46.40	0.91	RF147	4P	1024
	60	12015	24.83	0.94			
	74	9627	19.89	1.18	R147	4P	1014
	79	9098	18.80	1.17	RF147	4P	1024
	83	8612	17.80	1.16			
	92	7753	16.02	1.59			
	108	6635	13.71	1.80			
	114	6281	12.98	1.97			
	120	5954	12.30	2.1			
	151	4756	9.83	2.6			
	161	4438	9.17	2.8			
	173	4147	8.57	3.0			
	185	3879	8.01	3.2			
	197	3631	7.57	2.3			
	188	3802	7.86	2.2			
	202	3543	7.32	2.3			
	217	3307	6.83	2.5			
	232	3090	6.38	2.7			
	248	2890	5.97	2.9			
	265	2706	5.59	3.0			
90	37	23197	39.94	0.80	R 167	4P	1402
	39	21989	37.86	0.80	RF167	4P	1412
	42	20261	34.89	0.84			
	46	18848	32.45	0.91			
	49	17563	30.24	0.97			
	52	16389	28.22	1.04			
	56	15314	26.37	1.12			
	60	14324	24.67	1.19			
	64	13411	23.09	1.28			
	59	14571	25.09	0.91	R167	4P	1402
	67	12750	21.95	0.97	RF167	4P	1412
	76	11260	19.39	1.35			
	86	10018	17.25	1.42			
	101	8500	14.64	2.0			
	126	6849	11.79	2.4			
	142	6071	10.45	2.7			
	74	11552	19.89	0.99	R 147	4P	1075
	79	10917	18.80	0.97	RF147	4P	1082
	83	10335	17.80	0.97			
	92	9304	16.02	1.33			
	108	7961	13.71	1.50			
	114	7537	12.98	1.64			
	120	7145	12.30	1.73			
	151	5707	9.83	2.2			
	161	5325	9.17	2.3			
	173	4976	8.57	2.5			
	185	4654	8.01	2.7			
	197	4358	7.50	1.9			
	188	4563	7.86	1.8			

电动机功率 Power (KW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (I)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
90	202	4252	7.32	1.9	R 147	4P	1072
	217	3968	6.83	2.1	RF147	4P	1082
	232	3707	6.38	2.2			
	248	3468	5.97	2.4			
	265	3247	5.59	2.5			
110	52	20031	28.22	0.85	R167	4P	1740
	56	18717	26.37	0.91	RF167	4P	1750
	60	17507	24.67	0.98			
	64	16391	23.09	1.04			
	76	13762	19.39	1.10	R167	4P	1740
	86	12244	17.25	1.16	RF167	4P	1750
	101	10389	14.64	1.65			
	126	8370	11.79	1.93			
	142	7421	10.45	2.2			
132	64	19669	23.09	0.87	R 167	4P	1840
					RF167	4P	1850
	76	16514	19.39	0.92	R167	4P	1840
	86	14693	17.25	0.97	RF167	4P	1850
	101	12467	14.64	1.37			
	126	10045	11.79	1.61			
	142	8905	10.45	1.81			
160	101	15111	14.64	1.13	R167	4P	1860
	126	12175	11.79	1.33	RF167	4P	1870
	142	10794	10.45	1.50			

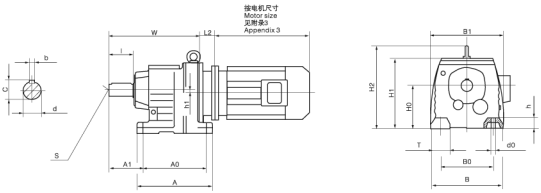

型号 Type	安装尺寸 Installation dimensions					轴伸尺寸 Shaft dimensions					外形尺寸 Overall dimensions									
	H0	A0	B0	A1	d0	d	l	b	c	S	W	A	B	B1	H1	H2	T	h	h1	L2
R37	90	130	110	75	9	25k6	50	8	28	M10	201	160	145	161	151	–	35	18	10	见85页 page 85
R47	115	165	135	90	13.5	30k6	60	8	33	M10	241	195	170	178	187	–	42	24	15	
R57	115	165	135	100	13.5	35k6	70	10	38	M12	260	200	190	210	187	–	55	24	14.1	
R67	130	195	150	100	14	35k6	70	10	38	M12	280	235	210	215	212	243	60	30	20.1	
R77	140	205	170	115	17.5	40k6	80	12	43	M16	300	245	235	240	228	269	60	30	18.2	
R87	180	260	215	140	17.5	50k6	100	14	53.5	M16	372	310	290	297	295	345	75	45	10.6	
R97	225	310	250	160	22	60m6	120	18	64	M20	440	365	350	358	368	418	90	55	10.7	
R107	250	370	290	185	26	70m6	140	20	74.5	M20	502	440	405	410	408	475	110	65	21.3	
R137	315	410	340	220	33	90m6	170	25	95	M24	589	490	455	463	495	580	110	70	25	
R147	355	500	380	260	39	110m6	210	28	116	M24	695	590	530	540	565	635	150	80	37.5	
R167	425	580	500	270	39	120m6	210	32	127	M24	790	670	660	670	675	749	160	100	45	

根据客户需求，可用带过渡法兰，也可直联。

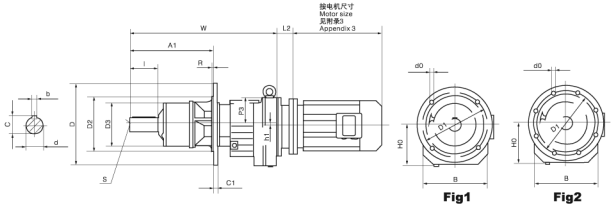

型号 Type	安装尺寸 Installation dimensions									轴伸尺寸 Shaft dimensions					外形尺寸 Overall dimensions					
	D	D2	D3	Fig	D1	C1	A1	R	d0	d	l	c	b	S	W	H0	B	P3	h1	L2
RM57	250	180j6	135	1	215	15	230	4	13.5	35k6	70	38	10	M12	422.5	121	205	72	14.1	见85页 page 85
RM67	300	230j6	144	1	265	16	240	4	13.5	40k6	80	43	12	M16	459	134	215	82	20.1	
RM77	350	250h6	170	1	300	18	300	5	17.5	50k6	100	53.5	14	M16	527	144	240	88	18.2	
RM87	350	250h6	186	1	300	18	360	5	17.5	60m6	120	64	18	M20	639	184	300	115	10.6	
RM97	450	350h6	214	2	400	22	420	5	17.5	70m6	140	74.5	20	M20	745	230	358	144	10.7	
RM107	550	450h6	232	2	500	25	500	5	17.5	80m6	170	85	22	M20	871	255	420	158	21.3	
RM137	550	450h6	253	2	500	25	600	5	17.5	100m6	210	106	28	M24	1024	320	458	180	25	
RM147	660	550h6	274	2	600	28	660	6	22	110m6	210	116	28	M24	1154	358	540	197	37.5	
RM167	660	550h6	290	2	600	28	730	6	22	125m6	210	134	32	M24	1313	430	670	250	45	

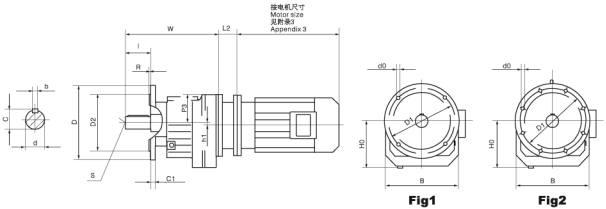

型号 Type	安装尺寸 Installation dimensions							轴伸尺寸 Shaft dimensions					外形尺寸 Overall dimensions					
	D	Fig	D1	R	d0	D2	C1	d	l	c	b	S	W	H0	B	P3	h1	L2
RF37	120	1	100	3	6.5	80j6	8	25k6	50	28	8	M10	201	94	161	61	10	见85页 page 85
	160	1	130	3.5	9	110j6	10											
	200	1	165	3.5	11	130j6	12											
RF47	140	1	115	3	8.5	95j6	8	30k6	60	33	8	M10	241	118	181	72	15	
	160	1	130	3.5	9	110j6	10											
	200	1	265	3.5	11	13016	12											
RF57	160	1	130	3.5	9	1 10j6	10	35k6	70	38	10	M12	259.5	121	205	72	14.1	
	200	1	165	3.5	11	130j6	12											
	250	1	215	4	13.5	180j6	16											
RF67	200	1	165	3.5	11	130j6	12	35k6	70	38	10	M12	280	134	215	82	20.1	
	250	1	215	4	13.5	180j6	15											
RF77	250	1	215	4	13.5	180j6	15	40k6	80	43	12	M16	300	144	240	88	18.2	
	300	1	215	4	13.5	230j6	16											
RF87	300	1	265	4	13.5	23016	16	50k6	100	53.5	14	M16	372	184	300	115	10.6	
	350	1	300	5	17.5	250h6	18											
RF97	350	2	300	5	17.5	250h6	18	60m6	120	64	18	M20	440	230	358	144	10.7	
	450	1	400	5	17.5	350h6	22											
RF107	350	2	300	5	17.5	250h6	20	70m6	140	74.5	20	M20	502	255	420	158	21.3	
	450	2	400	5	17.5	350h6	22											
RF137	450	2	400	5	17.5	350h6	22	90m6	170	95	25	M24	589	320	458	180	25	
	550	2	500	5	17.5	450h6	25											
RF147	450	2	400	5	17.5	350h6	22	110m6	210	116	28	M24	695	358	540	197	37.5	
	550	2	500	5	17.5	450h6	25											
RF167	550	2	500	5	17.5	450h6	25	120m6	210	127	32	M24	790	430	670	250	45	
	660	2	600	6	22	550h6	28											

接电机尺寸
Motor size
见附录3
Appendix 3

RM型
Model RM



接电机尺寸
Motor size
见附录3
Appendix 3

RM型
Model RM



RM型
Model RM



接电机尺寸
Motor size
见附录3
Appendix 3

型号Type	L1	P3	H0	L2
R..47SR37	150.5	61	94	见85页 page 85
R..57SR37	150.5	61	94	
R..67SR37	150.5	61	94	
R..77SR37	151	61	94	
R..87SR57	189	72	121	

型号Type	L1	P3	H0	L2
R..97SR57	190	72	121	见85页 page 85
R..107SR77	227	88	144	
R..137SR77	227	88	144	
R..147SR77	227	88	144	
R..147SR87	274	115	184	
R..167SR97	323	144	230	
R..167SR107	361	158	255	



RS型
Model RS



RS型
Model RFS



RS型
Model RMS

型号Type	d1	L1	l1	S1	c1	b1	g1
R..S37	16k6	115	40	M5	18	5	120
R..S47	19k6	120	40	M6	21.5	6	160
R..S57							
R..S67							
R..S77	24k6	140	50	M8	27	8	200
R..S87	28k6	180	60	M10	31	8	250
R..S97	38k6	220	80	M12	41	10	300
R..S107	42k6	270	110	M16	45	12	350
R..S137	55m6	307	110	M20	59	16	400
R..S147	55m6	297	110	M20	59	16	450
R..S167	70m6	374	140	M20	74.5	20	500

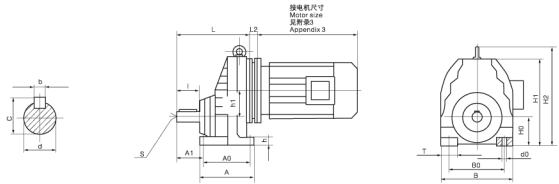

型号 Type	安装尺寸 Installation dimensions					轴伸尺寸 Shaft dimensions					外形尺寸 Overall dimensions								
	H0	A0	B0	A1	d0	d	b	c	l	S	L	A	B	H1	T	h	h1	H2	L2
RX57	63	110	125	56	11	20k6	6	22.5	40	M6	174	137	156	202	31	18	53	–	见85页 page 85
RX67	80	120	135	75	14	25k6	8	28	50	M10	201	150	170	226	35	20	60	–	
RX77	90	150	170	85	18	30k6	8	33	60	M10	227	190	204	271	50	25	72	–	
RX87	100	160	215	110	18	40k6	12	43	80	M16	269	206	266	332	60	30	93	372	
RX97	112	185	250	140	22	50k6	14	53.5	100	M16	316	240	320	393	70	35	116	440	
RX107	140	210	310	152	22	60m6	18	64	120	M20	364	260	360	459	90	45	133	506	

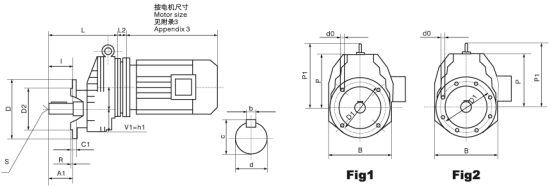

型号 Type	安装尺寸 Installation dimensions							轴伸尺寸 Shaft dimensions					外形尺寸 Overall dimensions								
	D	Fig	D1	D2	A1	R	d0	d	b	c	l	S	V1	P	P1	C1	L	h1	B	L2	
RXF57	160	1	130	110h7	40	3.5	9	20k6	6	22.5	40	M6	62	139	–	10	174	53	162	见85页 page 85	
	200		165	130h7			11									12					
RXF67	200	1	165	130h7	50	3.5	9	25k6	8	28	50	M10	70	147	–	12	201	60	175		
	250		215	180h7		4	14									13					
RXF77	200	1	165	130h7	60	3.5	11	30k6	8	33	60	M10	78	181	221	12	227	72	210		
	250		215	80h7		4	14									15					
RXF87	250	1	215	80h7	80	4	14	40k6	12	43	80	M16	98	232	272	15	269	93	272		
	300		265	230h7												16					
RXF97	300	2	265	230h7	100	4	14	50k6	14	53.5	100	M16	118	281	328	16	316	116	328		
	350		300	250h7		5	18									18					
RXF107	350	2	300	250h7	120	5	18	60m6	18	64	120	M20	135	319	366	18	364	133	370		
	400		400	350h7												22					



RXS型



RXFS型

型号Type	d1	L1	l1	S1	C1	b1	g1
RX..S47	19k6	120	40	M6	21.5	6	160
RX..S67	19k6	120	40	M6	21.5	6	160
RX..S77	24k6	140	50	M8	27	8	200
RX..S87	28k6	180	60	M10	31	8	250
RX..S97	38k6	220	80	M12	41	10	300
RX..S107	42k6	270	110	M16	45	12	350

1. R..7系列斜齿轮硬齿面减速机联接法兰L2长度表
1.The from on length of the contact flange L2 of the helical gear reductor of R..7 series

减速机型号 Reducer type / 电机机座号 Motor frame size	63	71	80	90	100	112	132	160	180	200	225	250	280	315
R.37	56	56	56	56	56	–	–	–	–	–	–	–	–	–
R.47	56	57	72	72	68	68	90	–	–	–	–	–	–	–
R.57	56	57	72	72	68	68	90	–	–	–	–	–	–	–
R.67	56	57	72	72	68	68	90	–	–	–	–	–	–	–
R.77	56	57	68	68	68	68	90	129	119	–	–	–	–	–
R.87	–	–	62	62	74	74	83	119	119	–	–	–	–	–
R.97	–	–	–	50	50	50	70	113	113	123	–	–	–	–
R.107	–	–	–	–	55	55	76	112	112	130	151	–	–	–
R.137	–	–	–	–	–	–	78	112	112	131	151	120	–	–
R.147	–	–	–	–	–	–	78	112	112	130	185	139	139	–
R.167	–	–	–	–	–	–	–	100	100	111	116	120	120	170

2. RX..7系列斜齿轮硬齿面减速机联接法兰L2长度表
2.The from on length of the contact flange L2 of the helical gear reductor of RX..7 series

减速机型号 Reducer type / 电机机座号 Motor frame size	63	71	80	90	100	112	132	160	180	200	225
RX57	56	57	72	72	68	68	90	–	–	–	–
RX67	56	57	72	72	68	68	90	–	–	–	–
RX77	–	57	68	64	64	65	68	94	–	–	–
RX87	–	–	–	62	62	74	83	95	95	–	–
RX97	–	–	–	–	–	–	70	113	113	108	–
RX107	–	–	–	–	–	–	77	112	112	105	121